

Doc. Number :

- ☐ Tentative Specification
☐ Preliminary Specification
☒ Approval Specification

MODEL NO.: M215HGK
SUFFIX: L30

Customer:

APPROVED BY

SIGNATURE

Name / Title _____

Note

Product Version C2

Please return 1 copy for your confirmation with your signature and comments.

Approved By	Checked By	Prepared By
梁永祥	林秋森	葉雅婷

CONTENTS

1. GENERAL DESCRIPTION	5
1.1 OVERVIEW	5
1.2 GENERAL SPECIFICATIONS	5
2. MECHANICAL SPECIFICATIONS	6
3. ABSOLUTE MAXIMUM RATINGS	7
3.1 ABSOLUTE RATINGS OF ENVIRONMENT	7
3.2 ELECTRICAL ABSOLUTE RATINGS	7
3.2.1 TFT-LCD MODULE	7
3.2.2 BACKLIGHT UNIT	8
3.2.3 TOUCH MODULE	8
4. ELECTRICAL SPECIFICATIONS	9
4.1.1 FUNCTION BLOCK DIAGRAM	9
4.1.2 TOUCH FUNCTION BLOCK DIAGRAM	9
4.2. INTERFACE CONNECTIONS	10
4.2.1 MODULE LCD PIN ASSIGNMENT	10
4.2.2 MODULE PANEL CONNECTOR INFORMATION	10
4.2.3 TOUCH SENSOR PIN ASSIGNMENT	11
4.2.4 TOUCH SENSOR CONNECTOR INFORMATION	11
4.3 ELECTRICAL CHARACTERISTICS	12
4.3.1 LCD ELETRONICS SPECIFICATION	12
4.3.2 VCC POWER DIP CONDITION	14
4.3.3 BACKLIGHT UNIT	15
4.3.4 LIGHTBAR CONNECTOR PIN ASSIGNMENT	16
4.4 LVDS INPUT SIGNAL SPECIFICATIONS	17
4.4.1 LVDS DATA MAPPING TABLE	17
4.4.2 COLOR DATA INPUT ASSIGNMENT	18
4.5 DISPLAY TIMING SPECIFICATIONS	19
4.6 POWER ON/OFF SEQUENCE	21
5. TOUCH SENSOR SPECIFICATION	22
5.1 TOUCH GENERAL SPECIFICATION	22
5.2 TOUCH ELECTRICAL SPECIFICATION	23
5.3 TOUCH TEST CONDITIONS	23
6. OPTICAL CHARACTERISTICS	24
6.1 TEST CONDITIONS	24
6.2 OPTICAL SPECIFICATIONS	24

7. RELIABILITY TEST ITEM	27
8. MECHANICAL STRENGTH CHARACTERISTICS	28
8.1 MECHANICAL STRENGTH CHARACTERISTICS	28
8.2 TEST CONDITIONS	28
8.3 DEFINITION OF TEST POINTS	28
9. PACKING	29
9.1 PACKING SPECIFICATIONS	29
9.2 PACKING METHOD	29
9.3 PALLET	30
9.4 UN-PACKING METHOD	30
10. INNOLUX MODULE LABEL	31
11. PRECAUTIONS	32
11.1 ASSEMBLY AND HANDLING PRECAUTIONS	32
11.2 STORAGE PRECAUTIONS	32
11.3 OPERATION PRECAUTIONS	32
11.4 SAFETY PRECAUTIONS	33
11.5 SAFETY STANDARDS	33
11.6 OTHER	33
Appendix 1. SYSTEM COVER DESIGN NOTICE	33
Appendix 2. OUTLINE DRAWING	36

REVISION HISTORY

[illegible]

1. GENERAL DESCRIPTION

1.1 OVERVIEW

M215HGK-L30 is a 21.5" TFT Liquid Crystal Display MNT module with PCT* sensor embedded, white-LED back-light unit and 30 pins 2 channels LVDS interface. This module supports 1920x1080 native resolutions and can display up to 16.7 millions colors. The converter module for Backlight is not built in.


*Projected Capacitive Touch

1.2 GENERAL SPECIFICATIONS

Item	Specification	Unit	Note
Active Area Size	21.5" real diagonal		
Driver Element	a-si TFT active matrix	-	
Pixel Number	1920 x R.G.B. x 1080	pixel	
Pixel Pitch	0.24795 (H) x 0.24795 (V)	mm	
Pixel Arrangement	RGB vertical stripe	-	
Display Colors	16.7M	color	
Transmissive Mode	Normally white	-	
Luminance, White	250	cd/m ²	
Color Gamut	72% of NTSC(Typ.)	-	
Display Orientation	Signal input with " INX"		
Touch Technology	Projected Capacitive Multi-Touch Panel	-	
Touch Method	Finger or Electrically Charged Object	-	
Numbers of Touch	10	Points	
Interface	USB	-	
Touch Sensor Glass Type	EXG	-	
RoHS, Halogen Free &TCO	Compliance	-	
Power Consumption	Total 18.81W @ cell 7.5W, BL 10.56W, Touch sensor 0.75W		(1)

Note (1) The specified power consumption: Total= cell(reference 4.3.1)+BL(reference 4.3.3)+TP(reference 5.2)

Note (2)

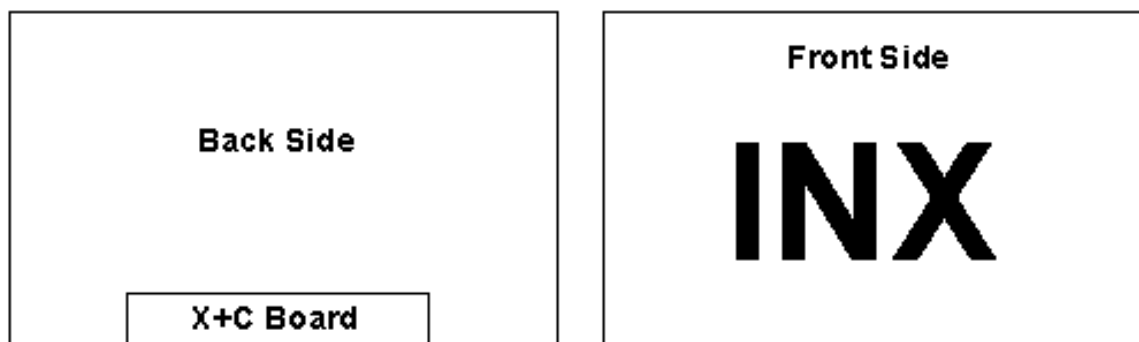

2. MECHANICAL SPECIFICATIONS

Item		Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal	502.2	502.7	503.2	mm	(1)
	Vertical	298	298.5	299	mm	
	Thickness	15.53	15.87	16.37	mm	
Bezel Area	Horizontal	489.4	489.7	490	mm	
	Vertical	281.1	281.4	281.7	mm	
Touch Sensor Visible Area	Horizontal	476.764	477.064	477.364	mm	
	Vertical	268.486	268.786	269.086	mm	
Display Active Area	Horizontal	475.764	476.064	476.364	mm	
	Vertical	267.486	267.786	268.086	mm	
Weight		2060	2140	2220	g	

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

3. ABSOLUTE MAXIMUM RATINGS

3.1 ABSOLUTE RATINGS OF ENVIRONMENT

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	TST	-20	60	°C	(1)
Operating Ambient Temperature	TOP	0	50	°C	(1), (2)


Note (1)

(a) 90 %RH Max.

(b) Wet-bulb temperature should be 39 °C Max.

(c) No condensation.

Note (2) Panel surface temperature should be 0°C min. and 60°C max under Vcc=5.0V, fr =60Hz, typical LED string current, 25°C ambient temperature, and no humidity control . Any condition of ambient operating temperature ,the surface of active area should be keeping not higher than 60°C .

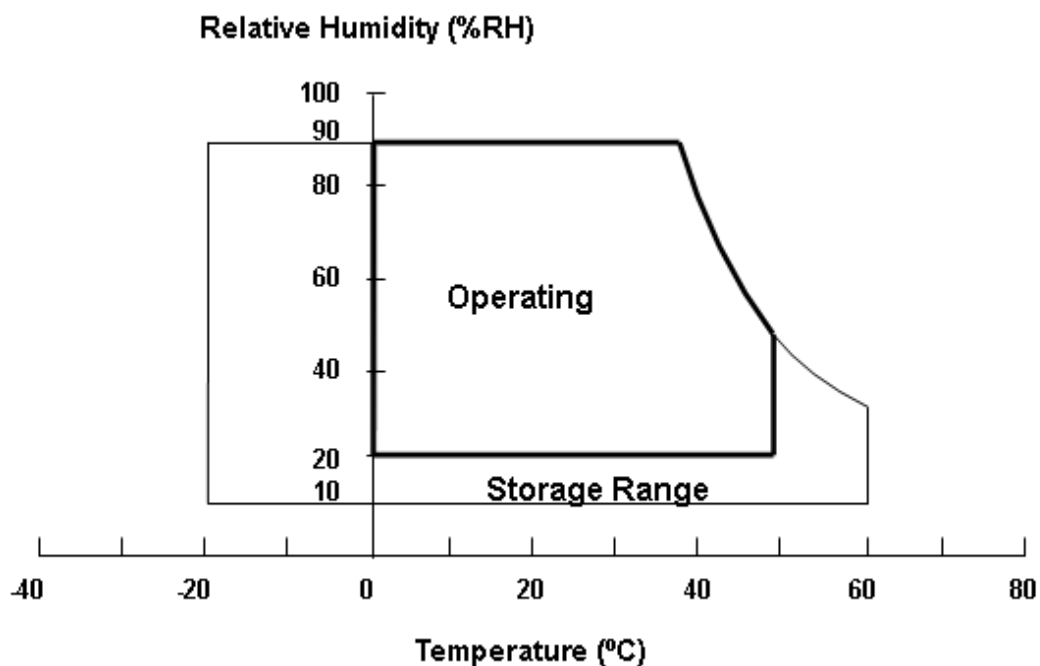

3.2 ELECTRICAL ABSOLUTE RATINGS

3.2.1 TFT-LCD MODULE

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Power Supply Voltage	VCCS	-0.3	6.0	V	(1)
Logic Input Voltage	V _{IN}	-0.3	3.6	V	

3.2.2 BACKLIGHT UNIT

Item	Symbol	Value			Unit	Note
		Min.	Typ	Max.		
LED Forward Current Per Input Pin	I _F	94	100	106	mA	(1), (2) Duty=100%
LED Pulse Forward Current Per Input Pin	I _P	---	---	---	mA	(1), (2) Pulse Width ≤ 10msec. and Duty ≤ 10%

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.


Note (2) Specified values are for input pin of LED light bar at Ta=25±2 °C (Refer to 4.3.3 and 4.3.4 for further information).

3.2.3 TOUCH MODULE


Item	Symbol	Value		Unit	Note
		Min.	Max.		
DC Supply Voltage	USB_VDD	-0.3	6.0	V	

4. ELECTRICAL SPECIFICATIONS

4.1.1 FUNCTION BLOCK DIAGRAM

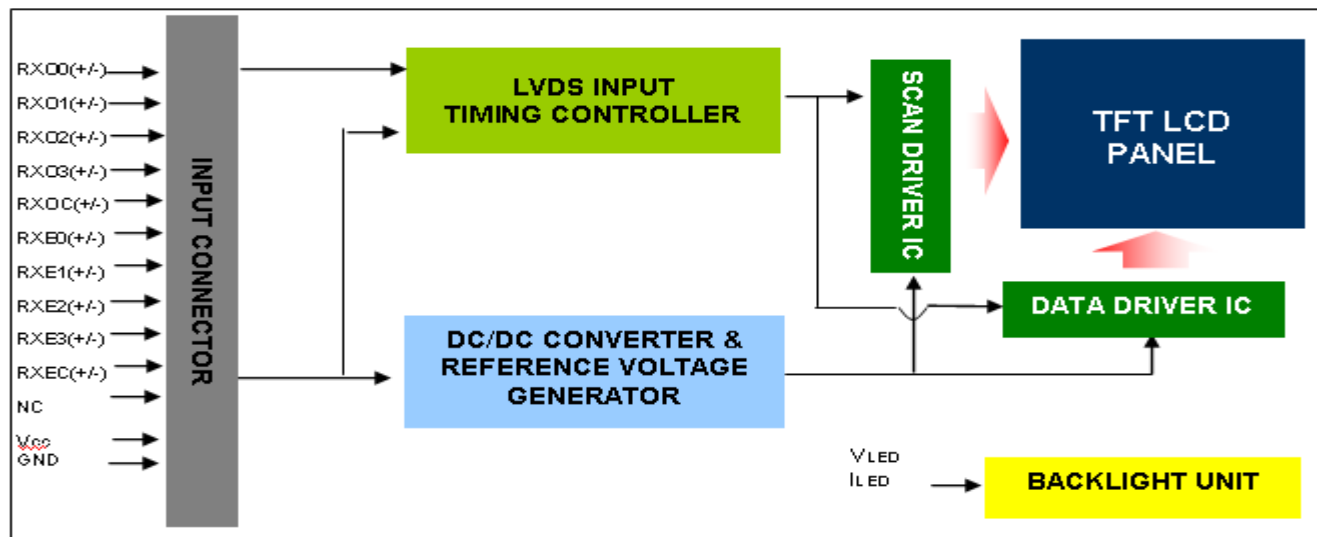

4.1.2 TOUCH FUNCTION BLOCK DIAGRAM

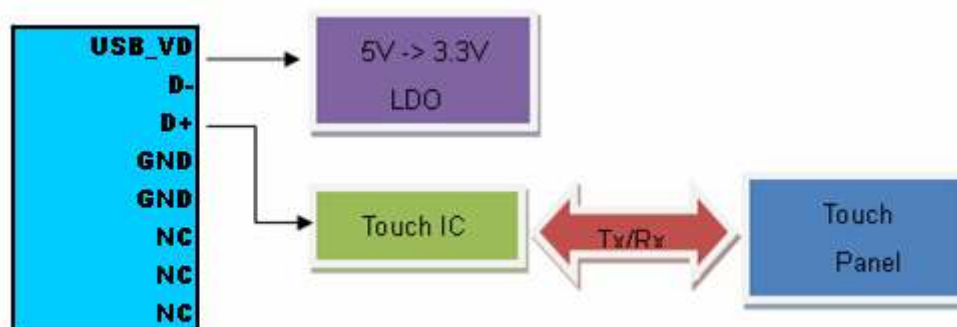

4.2. INTERFACE CONNECTIONS

4.2.1 MODULE LCD PIN ASSIGNMENT

Pin	Name	Description
1	RXO0-	Negative LVDS differential data input. Channel O0 (odd)
2	RXO0+	Positive LVDS differential data input. Channel O0 (odd)
3	RXO1-	Negative LVDS differential data input. Channel O1 (odd)
4	RXO1+	Positive LVDS differential data input. Channel O1 (odd)
5	RXO2-	Negative LVDS differential data input. Channel O2 (odd)
6	RXO2+	Positive LVDS differential data input. Channel O2 (odd)
7	GND	Ground
8	RXOC-	Negative LVDS differential clock input. (odd)
9	RXOC+	Positive LVDS differential clock input. (odd)
10	RXO3-	Negative LVDS differential data input. Channel O3(odd)
11	RXO3+	Positive LVDS differential data input. Channel O3 (odd)
12	RXE0-	Negative LVDS differential data input. Channel E0 (even)
13	RXE0+	Positive LVDS differential data input. Channel E0 (even)
14	GND	Ground
15	RXE1-	Negative LVDS differential data input. Channel E1 (even)
16	RXE1+	Positive LVDS differential data input. Channel E1 (even)
17	GND	Ground
18	RXE2-	Negative LVDS differential data input. Channel E2 (even)
19	RXE2+	Positive LVDS differential data input. Channel E2 (even)
20	RXEC-	Negative LVDS differential clock input. (even)
21	RXEC+	Positive LVDS differential clock input. (even)
22	RXE3-	Negative LVDS differential data input. Channel E3 (even)
23	RXE3+	Positive LVDS differential data input. Channel E3 (even)
24	GND	Ground
25	NC	For LCD internal use only, Do not connect
26	NC	For LCD internal use only, Do not connect
27	NC	For LCD internal use only, Do not connect
28	Vcc	+5.0V power supply
29	Vcc	+5.0V power supply
30	Vcc	+5.0V power supply

4.2.2 MODULE PANEL CONNECTOR INFORMATION

Item	Description
Manufacturer	P-TWO/ Foxconn
Type part number	P-TWO:187098-30091
Mating housing part number	FI-X30HL(JAE) P-TWO 27 代(P-TWO)

4.2.3 TOUCH SENSOR PIN ASSIGNMENT

Pin	Name	Description
1	USB_VDD	USB power (+5V)
2	D-	USB D- for touch panel
3	D+	USB D+ for touch panel
4	GND	Must tie to USB ground
5	GND	Internal 0 ohm to USB ground
6	NC	Reserve for Touch future usage
7	NC	Reserve for Touch future usage
8	NC	Reserve for Touch future usage


4.2.4 TOUCH SENSOR CONNECTOR INFORMATION

Item	Description
Manufacturer	FCN
Type part number	FCN WM13-406-083N
Mating housing part number	WF1300106-B

*Notice: There would be compatible issues, if not using the indicated connectors in the matching list.

Note (1) The first pixel is odd.

Note (2) Input signal of even and odd clock should be the same timing.

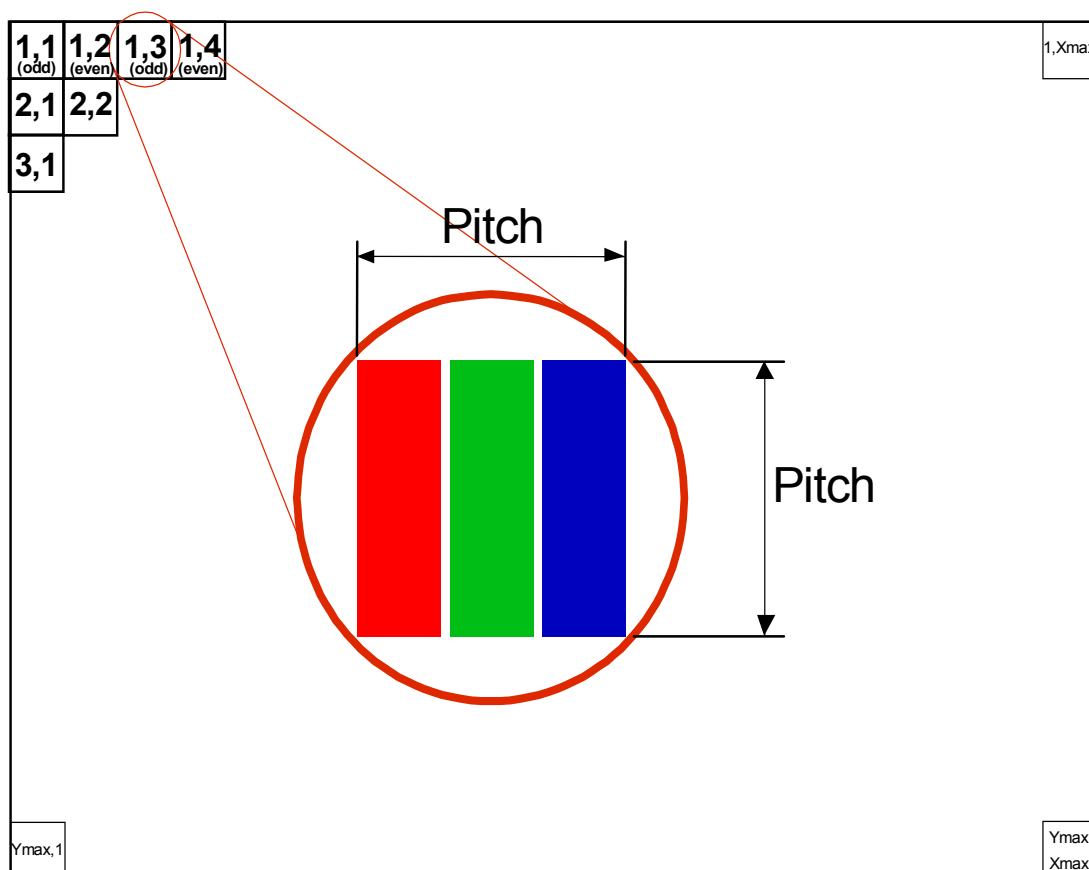


4.3 ELECTRICAL CHARACTERISTICS

4.3.1 LCD ELETRONICS SPECIFICATION


Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Power Supply Voltage	V _{CC}	4.5	5.0	5.5	V	-
Ripple Voltage	V _{RP}	-	-	300	mV	-
Rush Current	I _{RUSH}	-	-	3	A	(2)
Power Supply Current	White	-	0.6	0.78	A	(3)a
	Black	-	0.6	0.78	A	(3)b
	Vertical Stripe	-	1.2	1.5	A	(3)c
Power Consumption	PLCD	-	6	7.5	Watt	(4)
LVDS interface	Differential Input Voltage	V _{ID}	100	-	600	mV
	Common Input Voltage	V _{CM}	1.0	1.2	1.4	V
	Differential Input High Threshold Voltage	V _{TH}	-	-	+100	mV
	Differential Input Low Threshold Voltage	V _{TL}	-100	-	-	mV

Note (1) The ambient temperature is Ta = 25 ± 2 °C.

Note (2) Measurement Conditions:

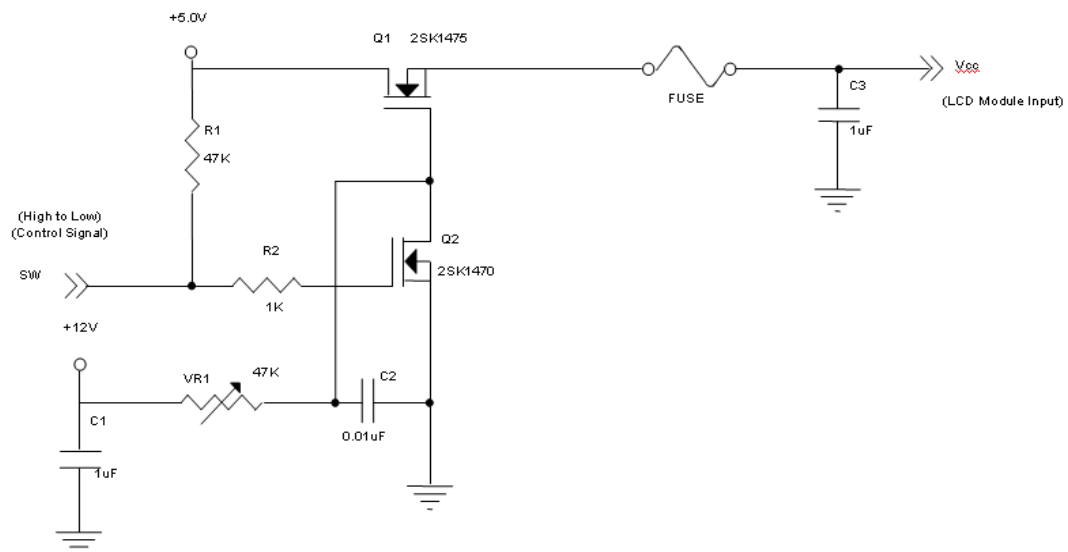

V_{CC} rising time is 470μs

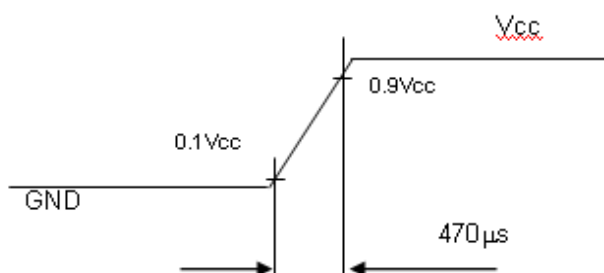


Note (3) The specified power supply current is under the conditions at V_{CC} = 5.0 V, T_a = 25 ± 2 °C, Fr = 60Hz, whereas a power dissipation check pattern below is displayed.

a. White Pattern




Active Area

b. Black Pattern




Active Area

c. Vertical Stripe Pattern

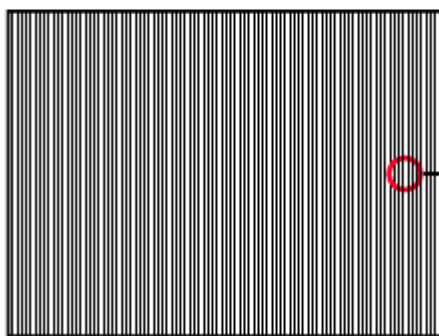


Active Area




Note (4) The power consumption is specified at the pattern with the maximum current.

Note (5) The LVDS input characteristics are as follows:


Single-end Signals

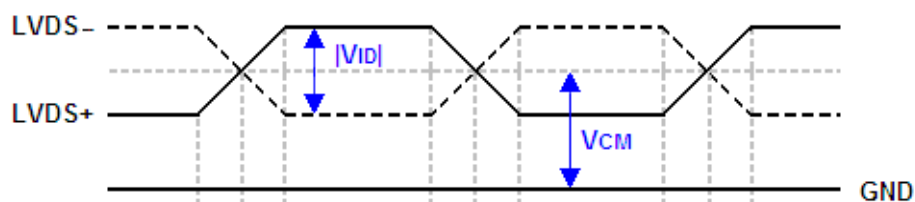

Differential Signal

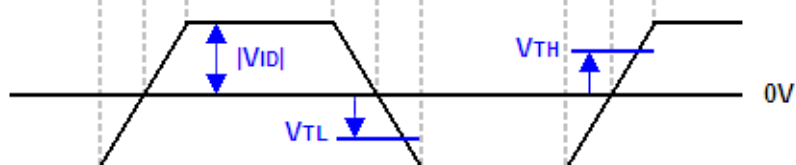

4.3.2 VCC POWER DIP CONDITION

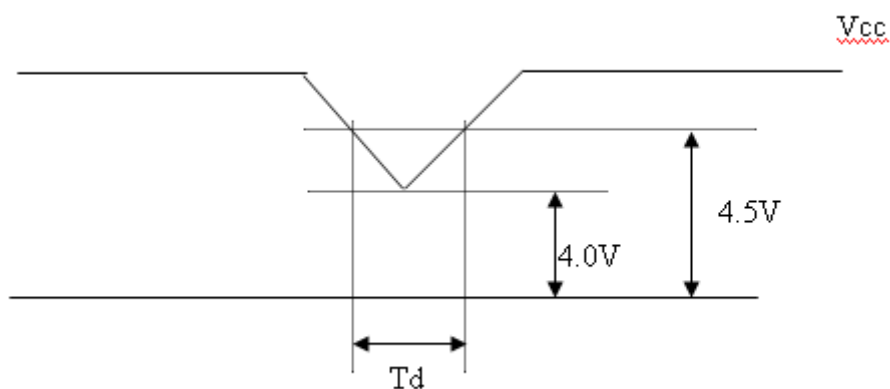

Dip condition: $4.0 \leq V_{CC} \leq 4.5$, $T_d \leq 20\text{ms}$

4.3.3 BACKLIGHT UNIT

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
LED Light Bar Input Voltage Per Input Pin	VPIN	45.6	48.8	52.8	V	(1), Duty=100%, IPIN=100mA
LED Light Bar Current Per Input Pin	IPIN	94	100	106	mA	(1), (2) Duty=100%
LED Life Time	LLED	30000			Hrs	(3)
Power Consumption	PBL	9.12	9.76	10.56	W	(1) Duty=100%, IPIN=100mA

Note (1) LED light bar input voltage and current are measured by utilizing a true RMS multimeter as shown below:

Note (2) $PBL(Typ) = IPIN(Typ) \times VPIN(Typ) \times (2)$ $PBL(Max) = IPIN(Typ) \times VPIN(Max) \times (2)$ input pins ,

Note (3) The lifetime of LED is defined as the time when LED packages continue to operate under the conditions at $T_a = 25 \pm 2 \text{ }^{\circ}\text{C}$ and $I = (100)\text{mA}$ (per chip) until the brightness becomes $\leq 50\%$ of its original value.

Note (4) The module must be operated with constant driving current.


4.3.4 LIGHTBAR CONNECTOR PIN ASSIGNMENT

(1) Connector Information:


Item	Description
Manufacturer	FCN/ Entery/ CviLux
Type part number	WM13-406-063N(FCN) / 3707K-Q06N-08L(Entery) / CI1406M1HRK-NH(CviLux)
Mating housing part number	WF1300106-B (FCN) / H112K-P06N-01B (Entery) / M001-E11N-00R (Entery) / CI1406SL000-NH (CviLux).

*Notice: There would be compatible issues if not using the indicated connectors in the matching list.

(2) LB Connector drawing:

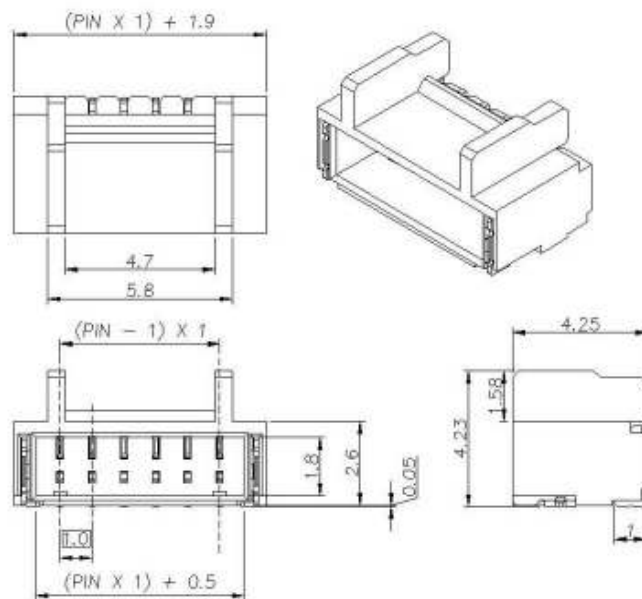

Pin number	Description
1	Cathode of LED string1
2	NC
3	VLED
4	VLED
5	NC
6	Cathode of LED string4

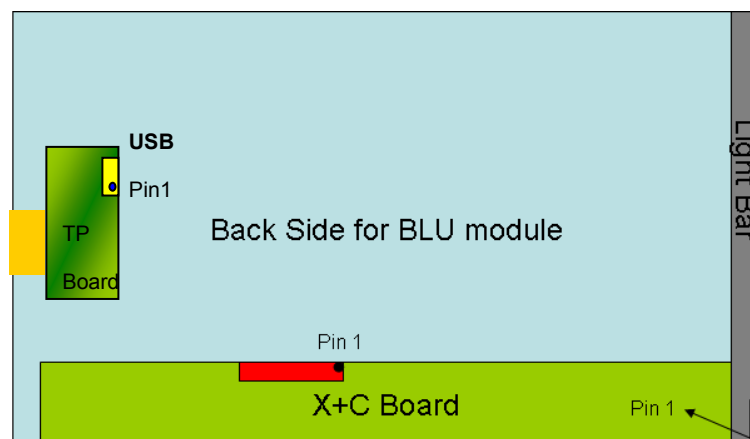

4.4 LVDS INPUT SIGNAL SPECIFICATIONS

4.4.1 LVDS DATA MAPPING TABLE

LVDS Channel O0	LVDS output	D7	D6	D4	D3	D2	D1	D0
	Data order	OG0	OR5	OR4	OR3	OR2	OR1	OR0
LVDS Channel O1	LVDS output	D18	D15	D14	D13	D12	D9	D8
	Data order	OB1	OB0	OG5	OG4	OG3	OG2	OG1
LVDS Channel O2	LVDS output	D26	D25	D24	D22	D21	D20	D19
	Data order	DE	NA	NA	OB5	OB4	OB3	OB2
LVDS Channel O3	LVDS output	D23	D17	D16	D11	D10	D5	D27
	Data order	NA	OB7	OB6	OG7	OG6	OR7	OR6
LVDS Channel E0	LVDS output	D7	D6	D4	D3	D2	D1	D0
	Data order	EG0	ER5	ER4	ER3	ER2	ER1	ER0
LVDS Channel E1	LVDS output	D18	D15	D14	D13	D12	D9	D8
	Data order	EB1	EB0	EG5	EG4	EG3	EG2	EG1
LVDS Channel E2	LVDS output	D26	D25	D24	D22	D21	D20	D19
	Data order	DE	NA	NA	EB5	EB4	EB3	EB2
LVDS Channel E3	LVDS output	D23	D17	D16	D11	D10	D5	D27
	Data order	NA	EB7	EB6	EG7	EG6	ER7	ER6

4.4.2 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 8-bit gray scale data input for the color. The higher the binary input, the brighter the color. The table below provides the assignment of color versus data input.

Color		Data Signal																							
		Red								Green								Blue							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Red(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale Of Green	Green(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
	Green(253)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray Scale Of Blue	Blue(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Note (1) 0: Low Level Voltage, 1: High Level Voltage

4.5 DISPLAY TIMING SPECIFICATIONS

The input signal timing specifications are shown as the following table and timing diagram.


Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
LVDS Clock	Frequency	F _c	58.54	74.25	97.98	MHz	-
	Period	T _c	-	13.47	-	ns	-
	Input cycle to cycle jitter	T _{rci}	-0.02*TC	-	0.02*TC	ns	(1)
	Input Clock to data skew	TLVCCS	-0.02*TC		0.02*TC		(2)
	Spread spectrum modulation range	F _{ckin_mod}	0.97*FC	-	1.03*TC	MHz	(3)
	Spread spectrum modulation frequency	F _{SSM}	-	-	100	KHz	
Vertical Display Term	Frame Rate	Fr	50	60	75	Hz	
	Total	T _v	1115	1125	1136	Th	T _v =T _{vd} +T _{vb} -
	Active Display	T _{vd}	1080	1080	1080	Th	-
	Blank	T _{vb}	T _v -T _{vd}	T _v -T _{vd}	T _v -T _{vd}	Th	-
Horizontal Display Term	Total	T _h	1050	1100	1150	Tc	T _h =T _{hd} +T _{hb}
	Active Display	T _{hd}	960	960	960	Tc	-
	Blank	T _{hb}	T _h -T _{hd}	T _h -T _{hd}	T _h -T _{hd}	Tc	-

Note (1) Please make sure the range of pixel clock has follow the below equation and F_c,Fr,T_v,T_h not allowed to get beyond the min or max spec.


$$F_c = Fr \times T_v \times T_h$$

Because this module is operated by DE only mode, Hsync and Vsync input signals are ignored.


INPUT SIGNAL TIMING DIAGRAM

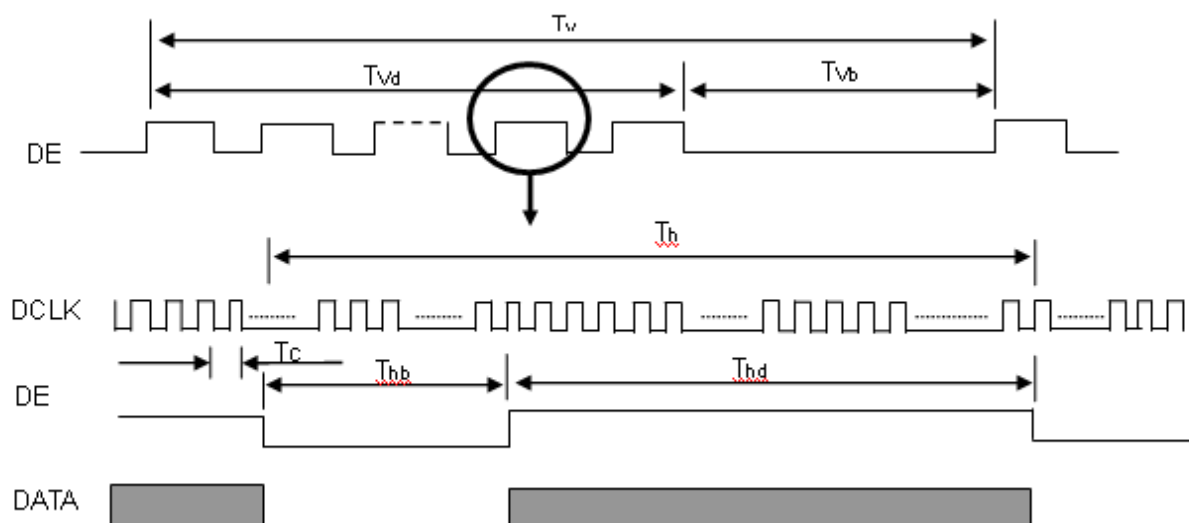


Note (1) The input clock cycle-to-cycle jitter is defined as below figures. $Trcl = |T_1 - T_1|$

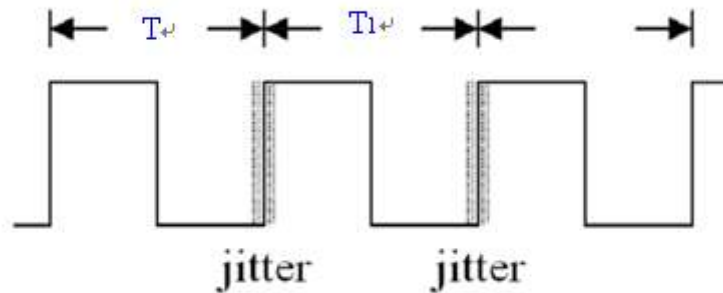

Note (2) Input Clock to data skew is defined as below figures.

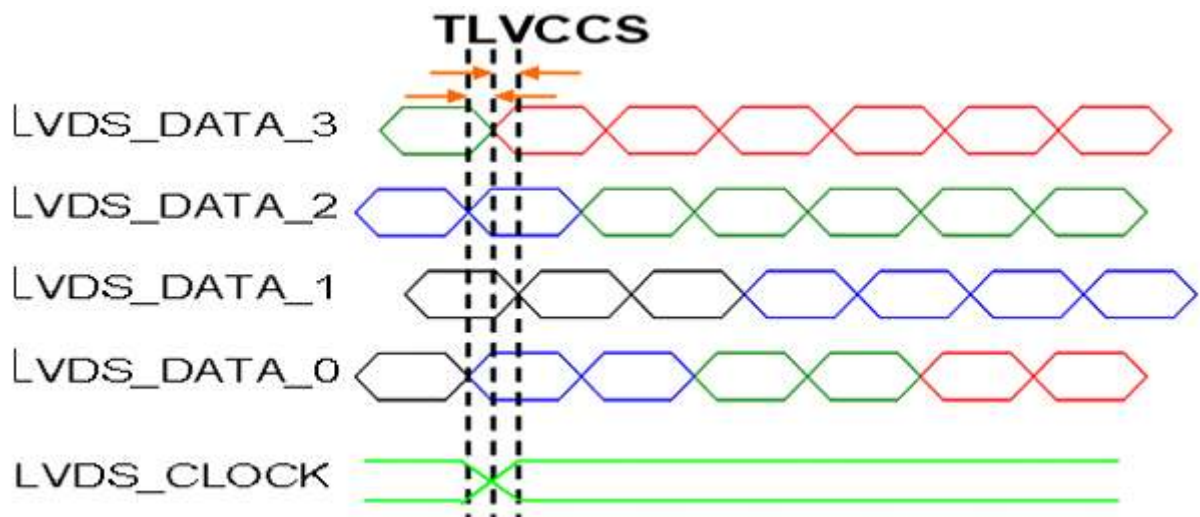


Note (3) The SSCG (Spread spectrum clock generator) is defined as below figures.

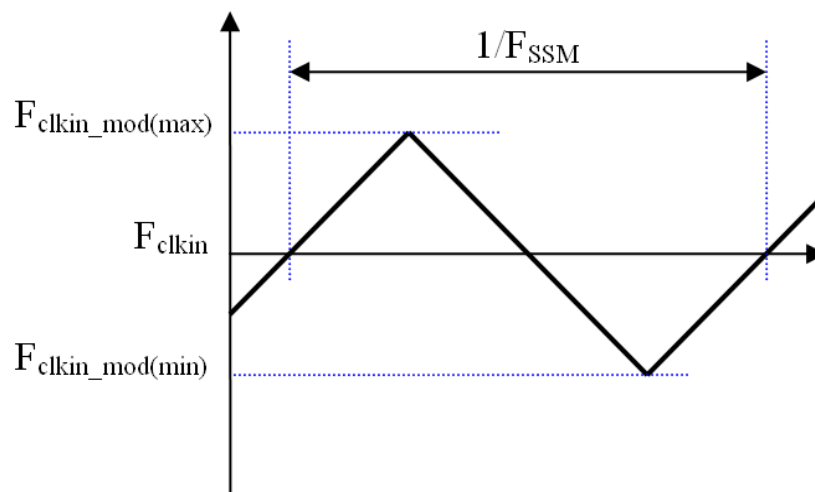

Note(4) The DCLK range at last line of V-blank should be set in 0 to Hdisplay/2

4.6 POWER ON/OFF SEQUENCE

The power sequence specifications are shown as the following table and diagram.

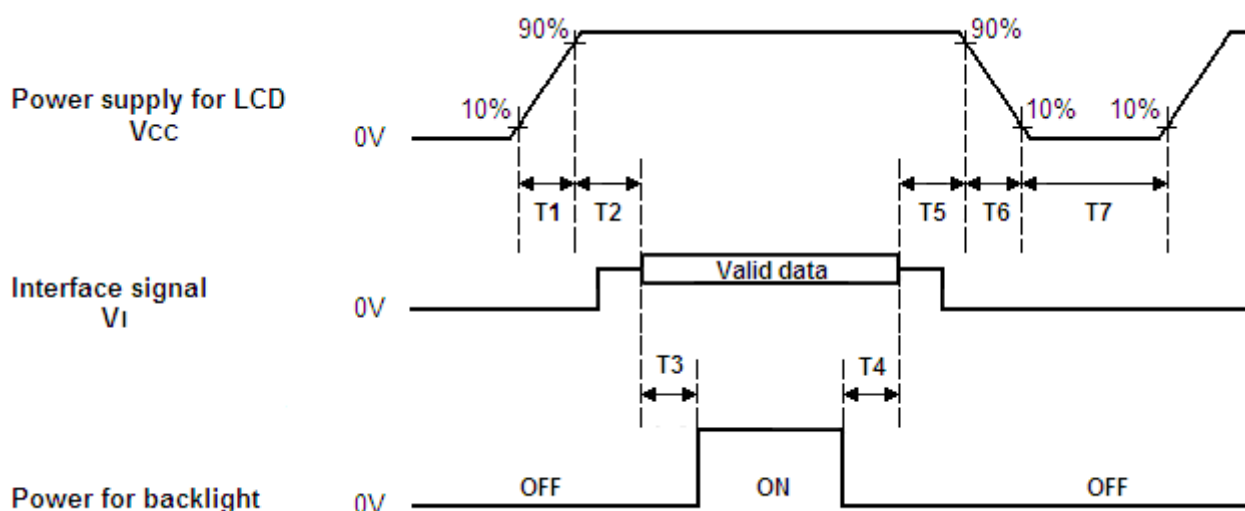

Timing Specifications:

Parameters	Values			Units
	Min	Typ.	Max	
T1	0.5	--	10	ms
T2	0	30	50	ms
T3	450	--	--	ms
T4	100	250	--	ms
T5	0	20	50	ms
T6	0.1	--	100	ms
T7	1000	--	--	ms

Note (1) The supply voltage of the external system for the module input should be the same as the definition of Vcc.

Note (2) When the backlight turns on before the LCD operation of the LCD turns off, the display may momentarily become abnormal screen.

Note (3) In case of VCC = off level, please keep the level of input signals on the low or keep a high impedance.

Note (4) T7 should be measured after the module has been fully discharged between power off and on period.

Note (5) Interface signal shall not be kept at high impedance when the power is on.

Note (6) INX won't take any responsibility for the products which are damaged by the customers not following the Power Sequence.


Note (7) There might be slight electronic noise when LCD is turned off (even backlight unit is also off). To avoid this symptom, we suggest "Vcc falling timing" to follow "t6 spec".

5. TOUCH SENSOR SPECIFICATION

5.1 TOUCH GENERAL SPECIFICATION

Items	General
Touch Module Size	21.5"
Touch Technology	Projected Capacitive Multi-Touch Panel
Number of Channels	87*49
Touch Method	Finger
Numbers of Touch	10 Points
Accuracy	+/- 1 mm (Reference note 1)
Linearity	Maximum of 1 mm over 10 mm of travel
Reporting rate	>100 Hz
Minimum stylus diameter	9 mm
Sensor Glass Material	EXG Glass
TP unit cell pattern pitch size	X 5525um/Y5567um
TP Type	One Glass Sensor (Sensor on Lens)
Touch Module Outline	502.7x298.5mm
Touch Active Area	481.023x272.783mm
Touch Window Visible Area	477.064x268.786mm
Touch Panel Thickness	0.52 mm +/-0.1 (WIS 0.5mm & Ink 0.2mm)
Surface Hardness	6H
Items	Electrical
Supply Voltage	USB: 5V
Interface	USB
Touch Channels (X - Y)	87*49
Sensor Pitch (X - Y)	X 5525um/Y5567um

Note (1)

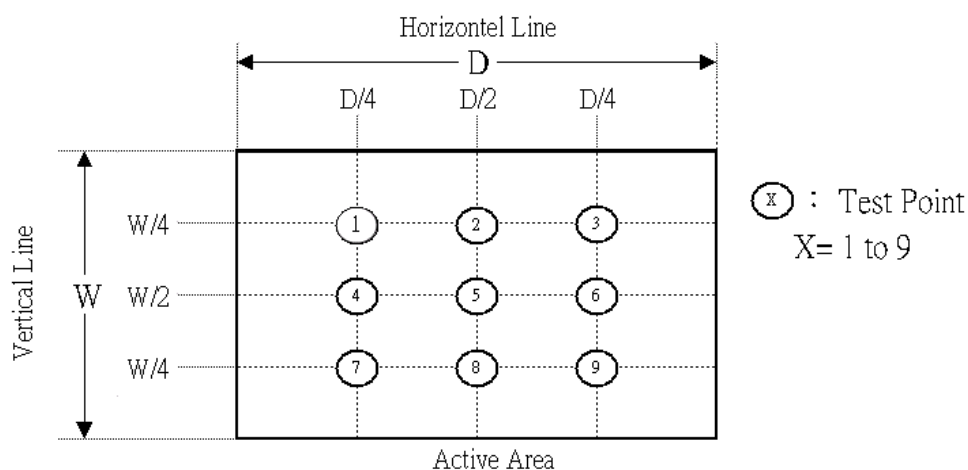

5.2 TOUCH ELECTRICAL SPECIFICATION

Item		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
USB Power Supply Voltage		USB	4.8	5	5.2	V	
Power Consumption	Active mode	IDD	150			mA	
	Idle mode	IDD	-			mA	
	Sleep mode	IDD	0			mA	

5.3 TOUCH TEST CONDITIONS

All of the touch test conditions are following Win 8 specification.

6. OPTICAL CHARACTERISTICS

6.1 TEST CONDITIONS


Item	Symbol	Value	Unit
Ambient Temperature	Ta	25±2	°C
Ambient Humidity	Ha	50±10	%RH
Supply Voltage	V _{CC}	5	V
Input Signal	According to typical value in "3. ELECTRICAL CHARACTERISTICS"		
LED Light Bar Input Current Per Input Pin	I _{PIN}	100	mA _{DC}
PWM Duty Ratio	D	100	%
LED Light Bar Test Converter	INX		

6.2 OPTICAL SPECIFICATIONS

The relative measurement methods of optical characteristics are shown in 5.2. The following items should be measured under the test conditions described in 5.1 and stable environment shown in Note (5).

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Color Chromaticity (CIE 1931)	Red	R _x	$\theta_x=0^\circ, \theta_Y=0^\circ$ CS-2000 R=G=B=255 Gray scale	Typ – 0.03	0.636	Typ + 0.03	-	(1), (5)
		R _y			0.338			
	Green	G _x			0.311			
		G _y			0.636			
	Blue	B _x			0.157			
		B _y			0.056			
	White	W _x			0.313			
		W _y			0.329			
Center Luminance of White (Center of Screen)		L _C		200	250	-	cd/m ²	(4), (5)
Contrast Ratio		CR		700	1000	-	-	(2), (5)
Response Time		T _R	$\theta_x=0^\circ, \theta_Y=0^\circ$	-	1.5	2.5	ms	(3)
		T _F		-	4.3	5.5		
White Variation		W	$\theta_x=0^\circ, \theta_Y=0^\circ$	75	-	-	%	(5), (6)
Viewing Angle	Horizontal	x- + x+	CR ≥ 10	150	170	-	Deg.	(1), (5)
	Vertical	y- + y+		140	160	-		
Viewing Angle	Horizontal	x- + x+	CR ≥ 5	160	178	---	Deg.	(1), (5)
	Vertical	y- + y+		150	170	---		

Note (1) Definition of Viewing Angle (θ_x , θ_y):

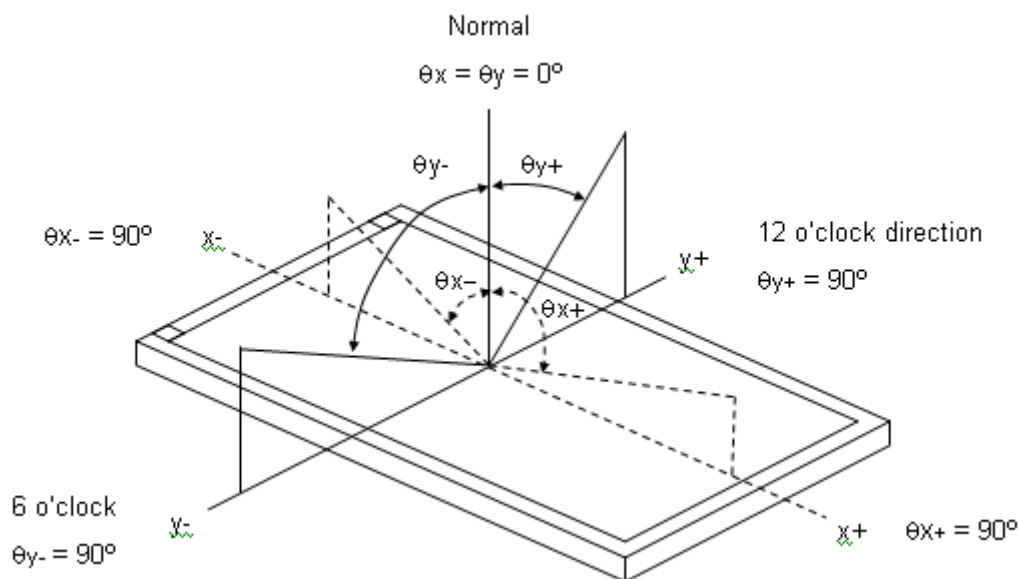

Note (2) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

$$\text{Contrast Ratio (CR)} = L_{255} / L_0$$


L255: Luminance of gray level 255

L 0: Luminance of gray level 0

$$CR = CR(5)$$

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (6).

Note (3) Definition of Response Time (T_R , T_F):

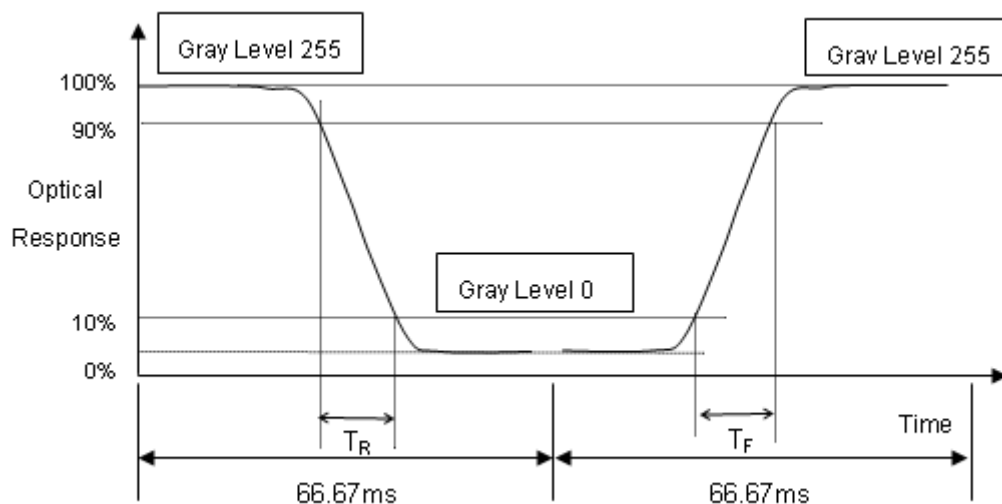

Note (4) Definition of Luminance of White (L_c):


Measure the luminance of gray level 255 at center point

$$L_c = L(5)$$

$L(x)$ is corresponding to the luminance of the point X at Figure in Note (6).

Note (5) Measurement Setup:


The LCD module should be stabilized at given temperature for 40 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 40 minutes in a windless room.

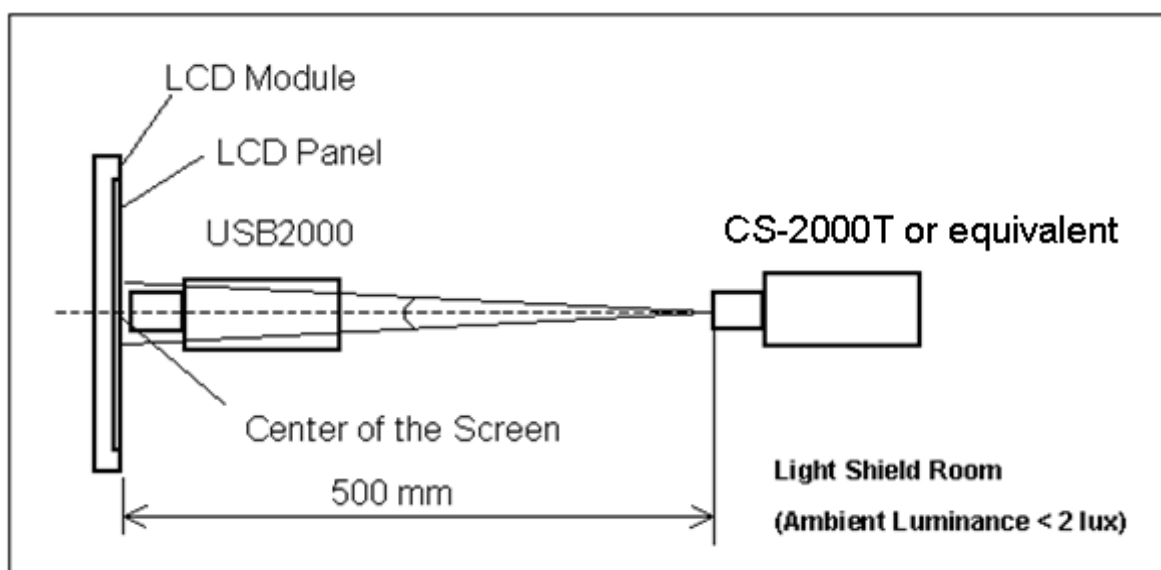

Note (6) Definition of White Variation (δW):

Measure the luminance of gray level 255 at 9 points

$$\delta W = (\text{Minimum } [L(1) \sim L(9)] / \text{Maximum } [L(1) \sim L(9)]) * 100\%$$

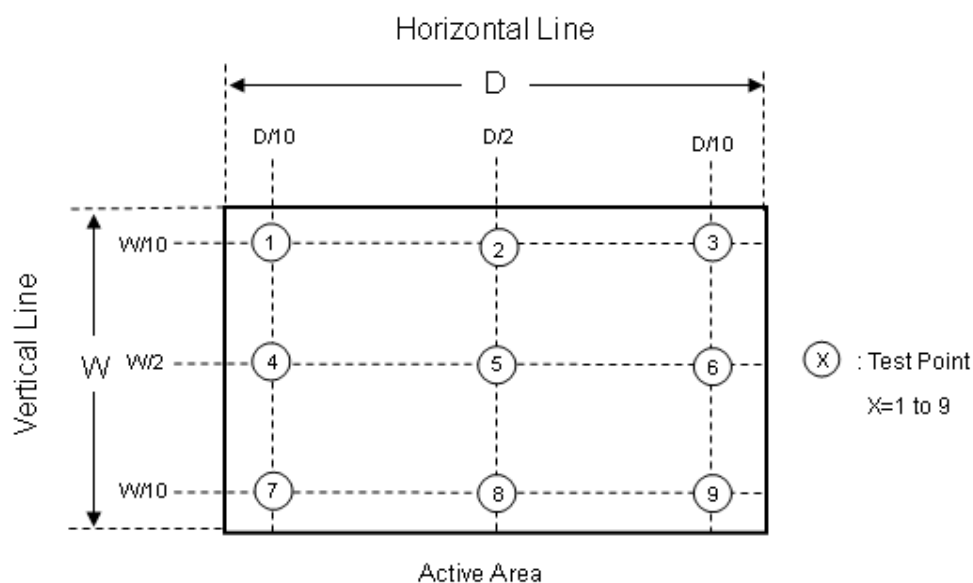

7. RELIABILITY TEST ITEM


Items	Required Condition	Note
Temperature Humidity Bias (THB)	Ta= 50℃ , 80%RH, 240hours	
High Temperature Operation (HTO)	Ta= 50℃ , 240hours	
Low Temperature Operation (LTO)	Ta= 0℃ , 240hours	
High Temperature Storage (HTS)	Ta= 60℃ , 240hours	
Low Temperature Storage (LTS)	Ta= -20℃ , 240hours	
Vibration Test (Non-operation)	Acceleration: 1.5 G Wave: Sine Frequency: 10 - 300 Hz Sweep: 30 Minutes each Axis (X, Y, Z)	
Shock Test (Non-operation)	Acceleration: 50 G Wave: Half-sine Active Time: 11 ms Direction : ± X, ± Y, ± Z.(one time for each Axis)	
Thermal Shock Test (TST)	-20℃/30min , 60℃ / 30min , 100 cycles	
On/Off Test	25℃ ,On/10sec , Off /10sec , 30,000 cycles	
ESD (Electro Static Discharge)	Contact Discharge: ± 8KV, 150pF(330Ω)	
	Air Discharge: ± 15KV, 150pF(330Ω)	
Altitude Test	Operation:10,000 ft / 24hours Non-Operation:30,000 ft / 24hours	

Note (1) criteria : Normal display image with no obvious non-uniformity and no line defect.

Note (2) Evaluation should be tested after storage at room temperature for more than two hour

Note (3) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.

The fixing condition is shown as below:

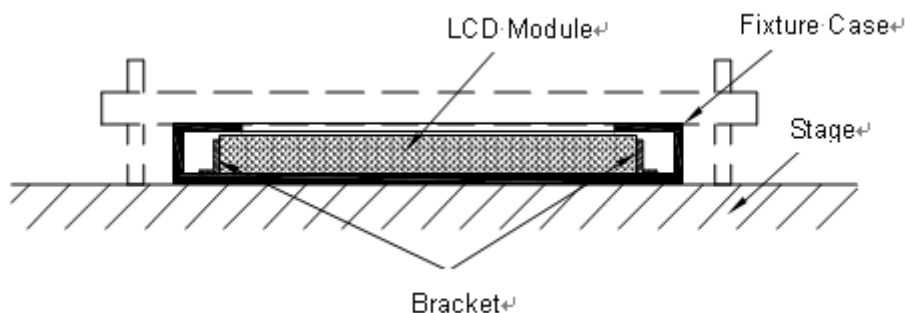

8. MECHANICAL STRENGTH CHARACTERISTICS

8.1 MECHANICAL STRENGTH CHARACTERISTICS


Item	Condition	Max	Unit	Note
Mechanical Strength	128 th Gray Pattern	0.6	Kgf	

8.2 TEST CONDITIONS

Items	Description
Test Condition	1. Ambient Illumination : 10~15 lux 2. Test Pattern : 128 Gray 3. Distance of the judgment : 30cm from the surface of module 4. Viewing angle of the judgment : Front
Gage Information	1. Push pull guage a. Model name : HF-50, maker : ALGOL b. Shape of gage tip - Diameter : 2mm - Thickness : 2mm
Definition of Minimum force	To measure minimum force when operator detects any white spot and light leakage that have occurred while operator presses on back side of module with push pull gage.

8.3 DEFINITION OF TEST POINTS

Measure the minimum force of test points at 128th Gray pattern. The test points at back side of module area is showing as below (If the test points on the PCBA or TP board, these points are not included).

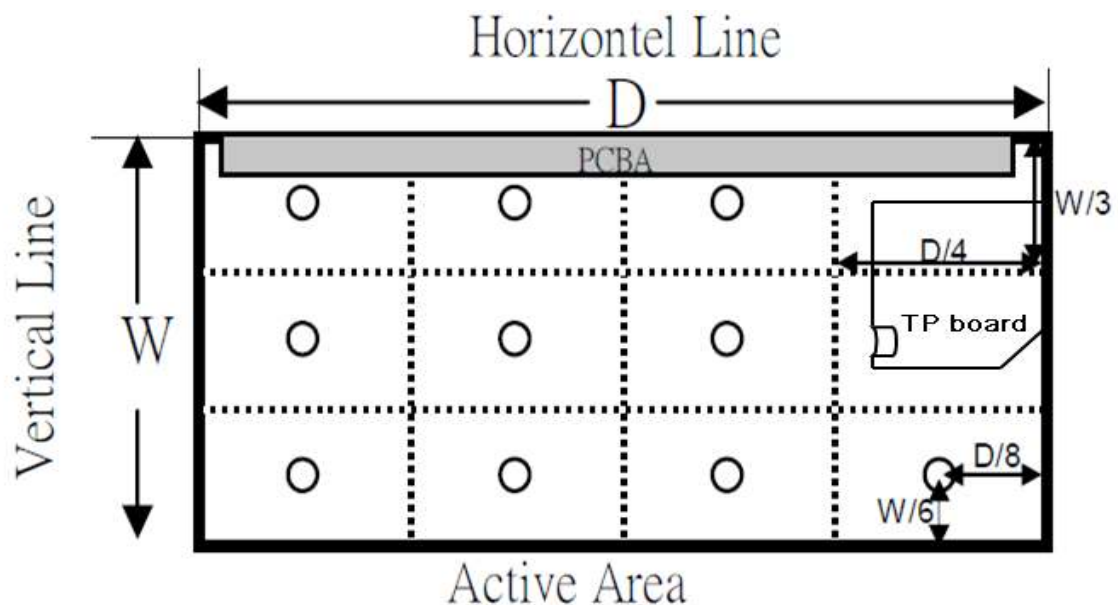

9. PACKING

9.1 PACKING SPECIFICATIONS

- (1) 12 LCD modules / 1 Box
- (2) Box dimensions: 567(L)*356 (W)*376(H)mm
- (3) Weight: approximately: 29.5 kg (12 modules per box)

9.2 PACKING METHOD


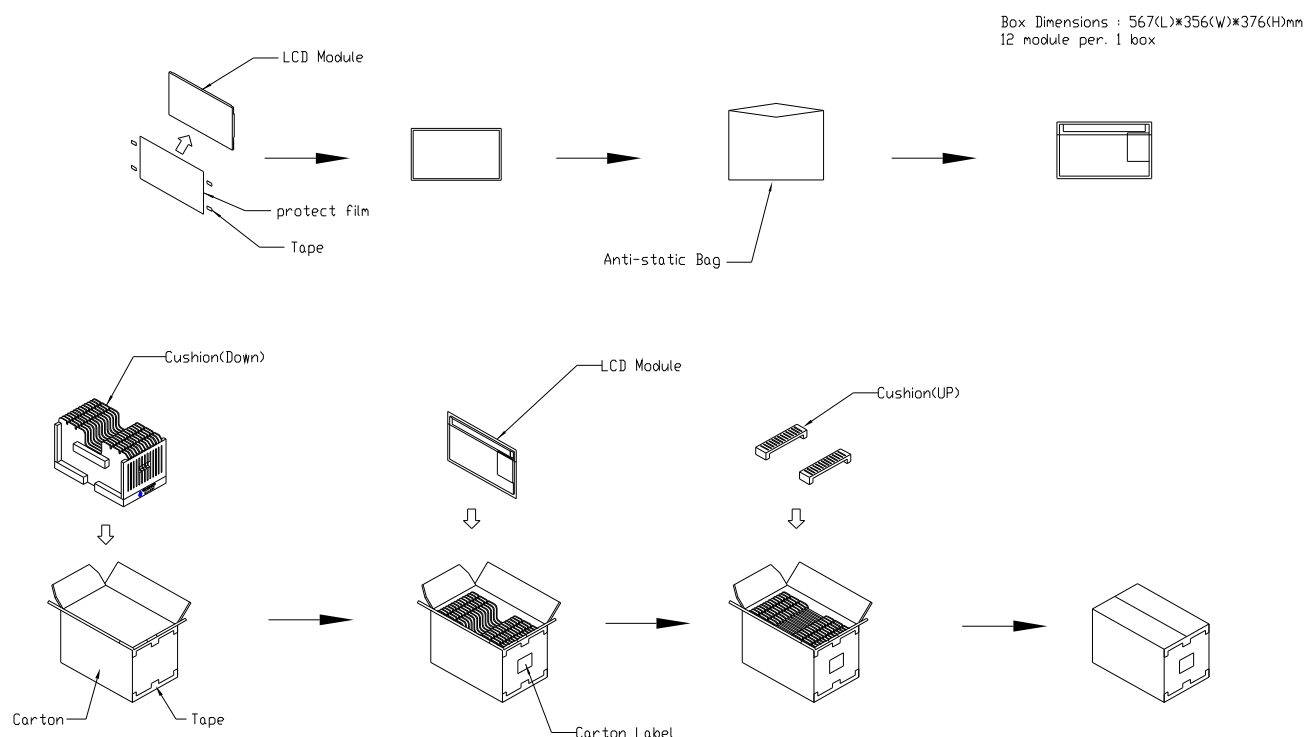



Figure. 9-1 Packing method

9.3 PALLET

Sea / Land Transportation (40ft HQ Container)
3+3 Layer

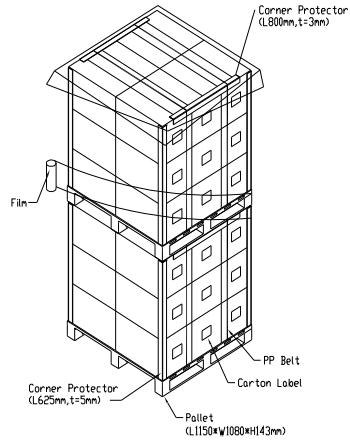

Sea / Land Transportation (40ft Container)
3+2 Layer

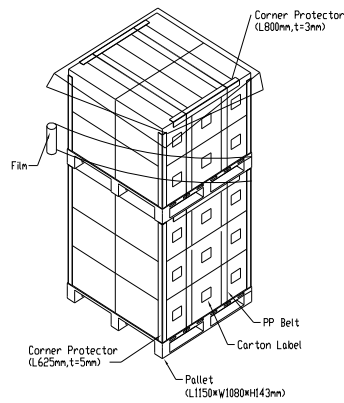

Air Transportation
3 Layer




Figure. 9-2 Packing method

9.4 UN-PACKING METHOD

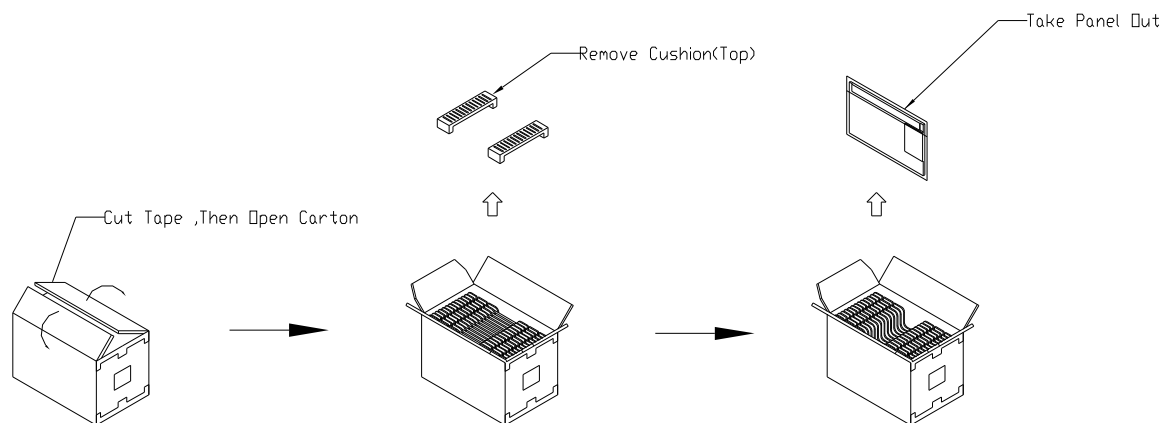


Figure. 9-3 Unpacking method

10. INNOLUX MODULE LABEL

The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.



(a) Model Name: M215HGK-L30

(b) Revision: Rev. XX, for example: A0, A1... B1, B2... or C1, C2...etc.

(c) INX barcode definition:

Serial ID: XX-XX-X-XX-YMD-L-NNNN

Code	Meaning	Description
XX	INX internal use	-
XX	Revision	Cover all the change
X	INX internal use	-
XX	INX internal use	-
YMD	Year, month, day	Year: 0~9, 2001=1, 2002=2, 2003=3...2010=0, 2011=1, 2012=2... Month: 1~12=1, 2, 3, ~, 9, A, B, C Day: 1~31=1, 2, 3, ~, 9, A, B, C, ~, W, X, Y, exclude I, O, and U.
L	Product line #	Line 1=1, Line 2=2, Line 3=3, ...
NNNN	Serial number	Manufacturing sequence of product

(d) Customer's barcode definition:

Serial ID : X-XXXX-XX-XX-WY-NNN

Code	Meaning	Description
X	Commodity code	Use "S" for Touch model
XXXX	Assembly code	According to HP's assembly coding rule
XX	Revision Level	For design change reversion
XX	Supply code	Production Fab : F3 for Tainan, VU for Ningbo
WY	Week/Year	Refer to HP coding rule
NNN	Sequence no	Manufacturing sequence of product

(e) FAB ID(UL Factory ID):

Region	Factory ID
TWINX	GEMN
NBCMI	LEOO
NBCMI	VIRO
NBCME	CANO
NHCMI	CAPG

11. PRECAUTIONS

11.1 ASSEMBLY AND HANDLING PRECAUTIONS

- (1) Do not apply rough force such as bending or twisting to the module during assembly.
- (2) To assemble or install module into user's system can be only in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.
- (3) It's not permitted to have pressure or impulse on the module because the LCD panel and Backlight will be damaged.
- (4) Always follow the correct power sequence when LCD module is connecting and operating. This can prevent damage to the CMOS LSI chips during latch-up.
- (5) Do not pull the I/F connector in or out while the module is operating.
- (6) Do not disassemble the module.
- (7) Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.
- (8) It is dangerous that moisture come into or contacted the LCD module, because moisture may damage LCD module when it is operating.
- (9) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.
- (10) When ambient temperature is lower than 10°C may reduce the display quality. For example, the response time will become slowly.
- (11) Do not press or scratch the surface harder than a HB pencil lead on the panel because the polarizer is very soft and easily scratched.

11.2 STORAGE PRECAUTIONS

- (1) Do not leave the module in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 0°C to 35°C and relative humidity of less than 90%
- (2) Do not store the TFT – LCD module in direct sunlight
- (3) The module should be stored in dark place. It is prohibited to apply sunlight or fluorescent light in storing

11.3 OPERATION PRECAUTIONS

- (1) The LCD product should be operated under normal condition.

Normal condition is defined as below :

Temperature : 20±15°C

Humidity: 65±20%

Display pattern : continually changing pattern(Not stationary)

- (2) If the product will be used in extreme conditions such as high temperature, high humidity, high altitude, display pattern or operation time etc... It is strongly recommended to contact INX for application engineering advice. Otherwise, its reliability and function may not be guaranteed.

11.4 SAFETY PRECAUTIONS

- (1) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- (2) After the module's end of life, it is not harmful in case of normal operation and storage.

11.5 SAFETY STANDARDS

The LCD module should be certified with safety regulations as follows:


- (1) UL60950-1 or updated standard.
- (2) IEC60950-1 or updated standard.



11.6 OTHER


When fixed patterns are displayed for a long time, remnant image is likely to occur.

Appendix 1. SYSTEM COVER DESIGN NOTICE

1.	Set Chassis and MNT Module touching Mode
Definition	<p>a) To prevent from abnormal display & white spot after Mechanical test, it is not recommended to used spring type chassis.</p> <p>b) We suggest the contact mode between Chassis and Module rear cover is Tape/Sponge, second is Flat sheetmetal type chassis (Don't interference from flat sheetmeter of chassis to rear cover of Module).</p>

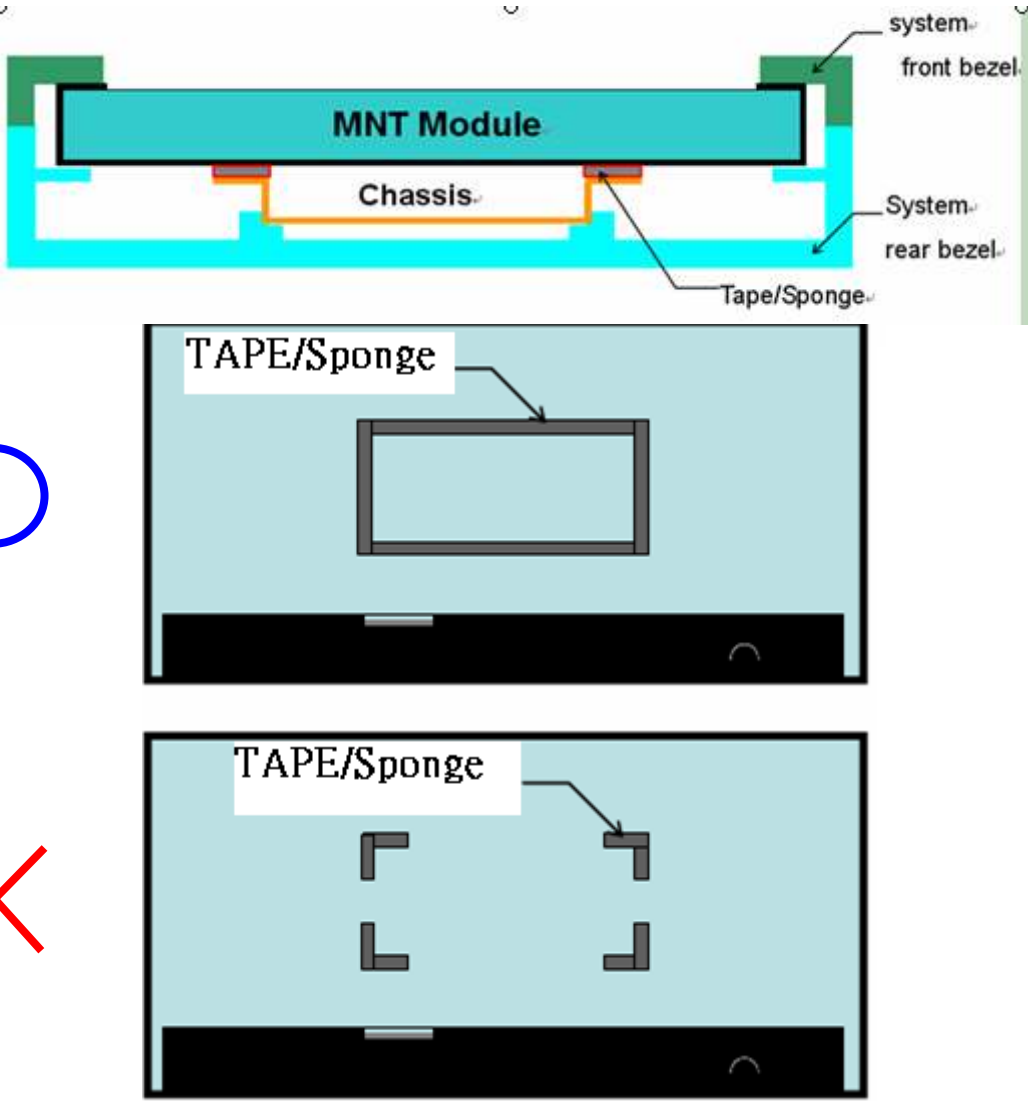
2	Tape/sponge design on system inner surface
	 <p>The diagram illustrates the correct and incorrect methods for applying Tape/Sponge on the system inner surface. The top diagram, marked with a blue circle, shows the correct placement: a continuous strip of Tape/Sponge is applied between the MNT Module and the Chassis, with labels for system front bezel, MNT Module, Chassis, System rear bezel, and Tape/Sponge. The bottom diagram, marked with a red X, shows the incorrect placement: Tape/Sponge is applied in four separate L-shaped pieces at the corners, which is not recommended.</p>
Definition	<p>a) To prevent from abnormal display & white spot after Mechanical test, We suggest using Tape/Sponge as medium between chassis and Module rear cover could reduce the occurrence of white spot.</p> <p>b) When using the Tape/Sponge, suggest it be lay over between set chassis and module rear cover. it is not recommended to add tape/sponge in separate location. Since each tape/sponge may act as pressure concentration location.</p>

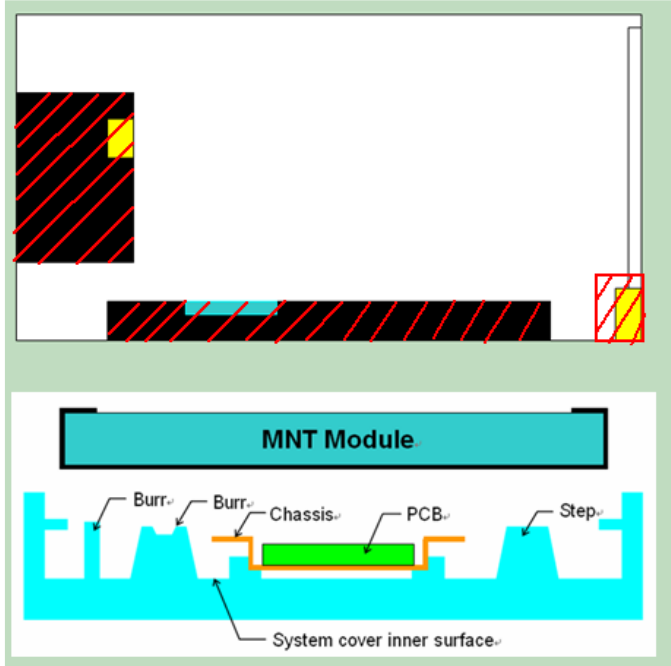3	System inner surface examination
	
Definition	<p>a). Burr at logo edge, step, protrusion or PCB board will easily cause white spot.</p> <p>b). Keeping flat surface underneath module is recommended.</p> <p>c). The area () on Module PCBA and Light bar connector should keep at least 1mm gap to any structure with System cover inner surface.</p>



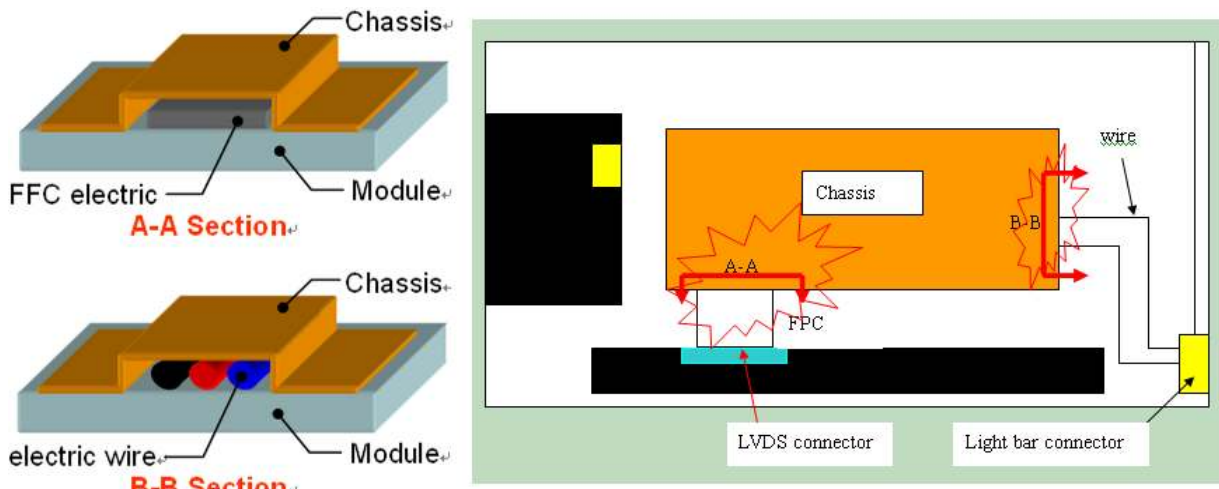
4	The overlapping part on System's Chassis and electric wire needs gap structure.
	
Definition	<p>The overlapping part on System's Chassis and electric wire (FPC、FFC and wire) needs gap structure to avoid display of white spot by pressing overlapping part cause interference.</p>

5	System cover's ventilation outlet structure
<p>Set ventilation outlet structure on light source side of module</p> <p>Light source edge (LED/lamp)</p> <p>module</p> <p>Light source Connector</p>	
Definition	To prevent from abnormal display of light leakage, We suggest to set ventilation outlet structure on side of Module Light bar in system cover inner surface.

Appendix 2. OUTLINE DRAWING

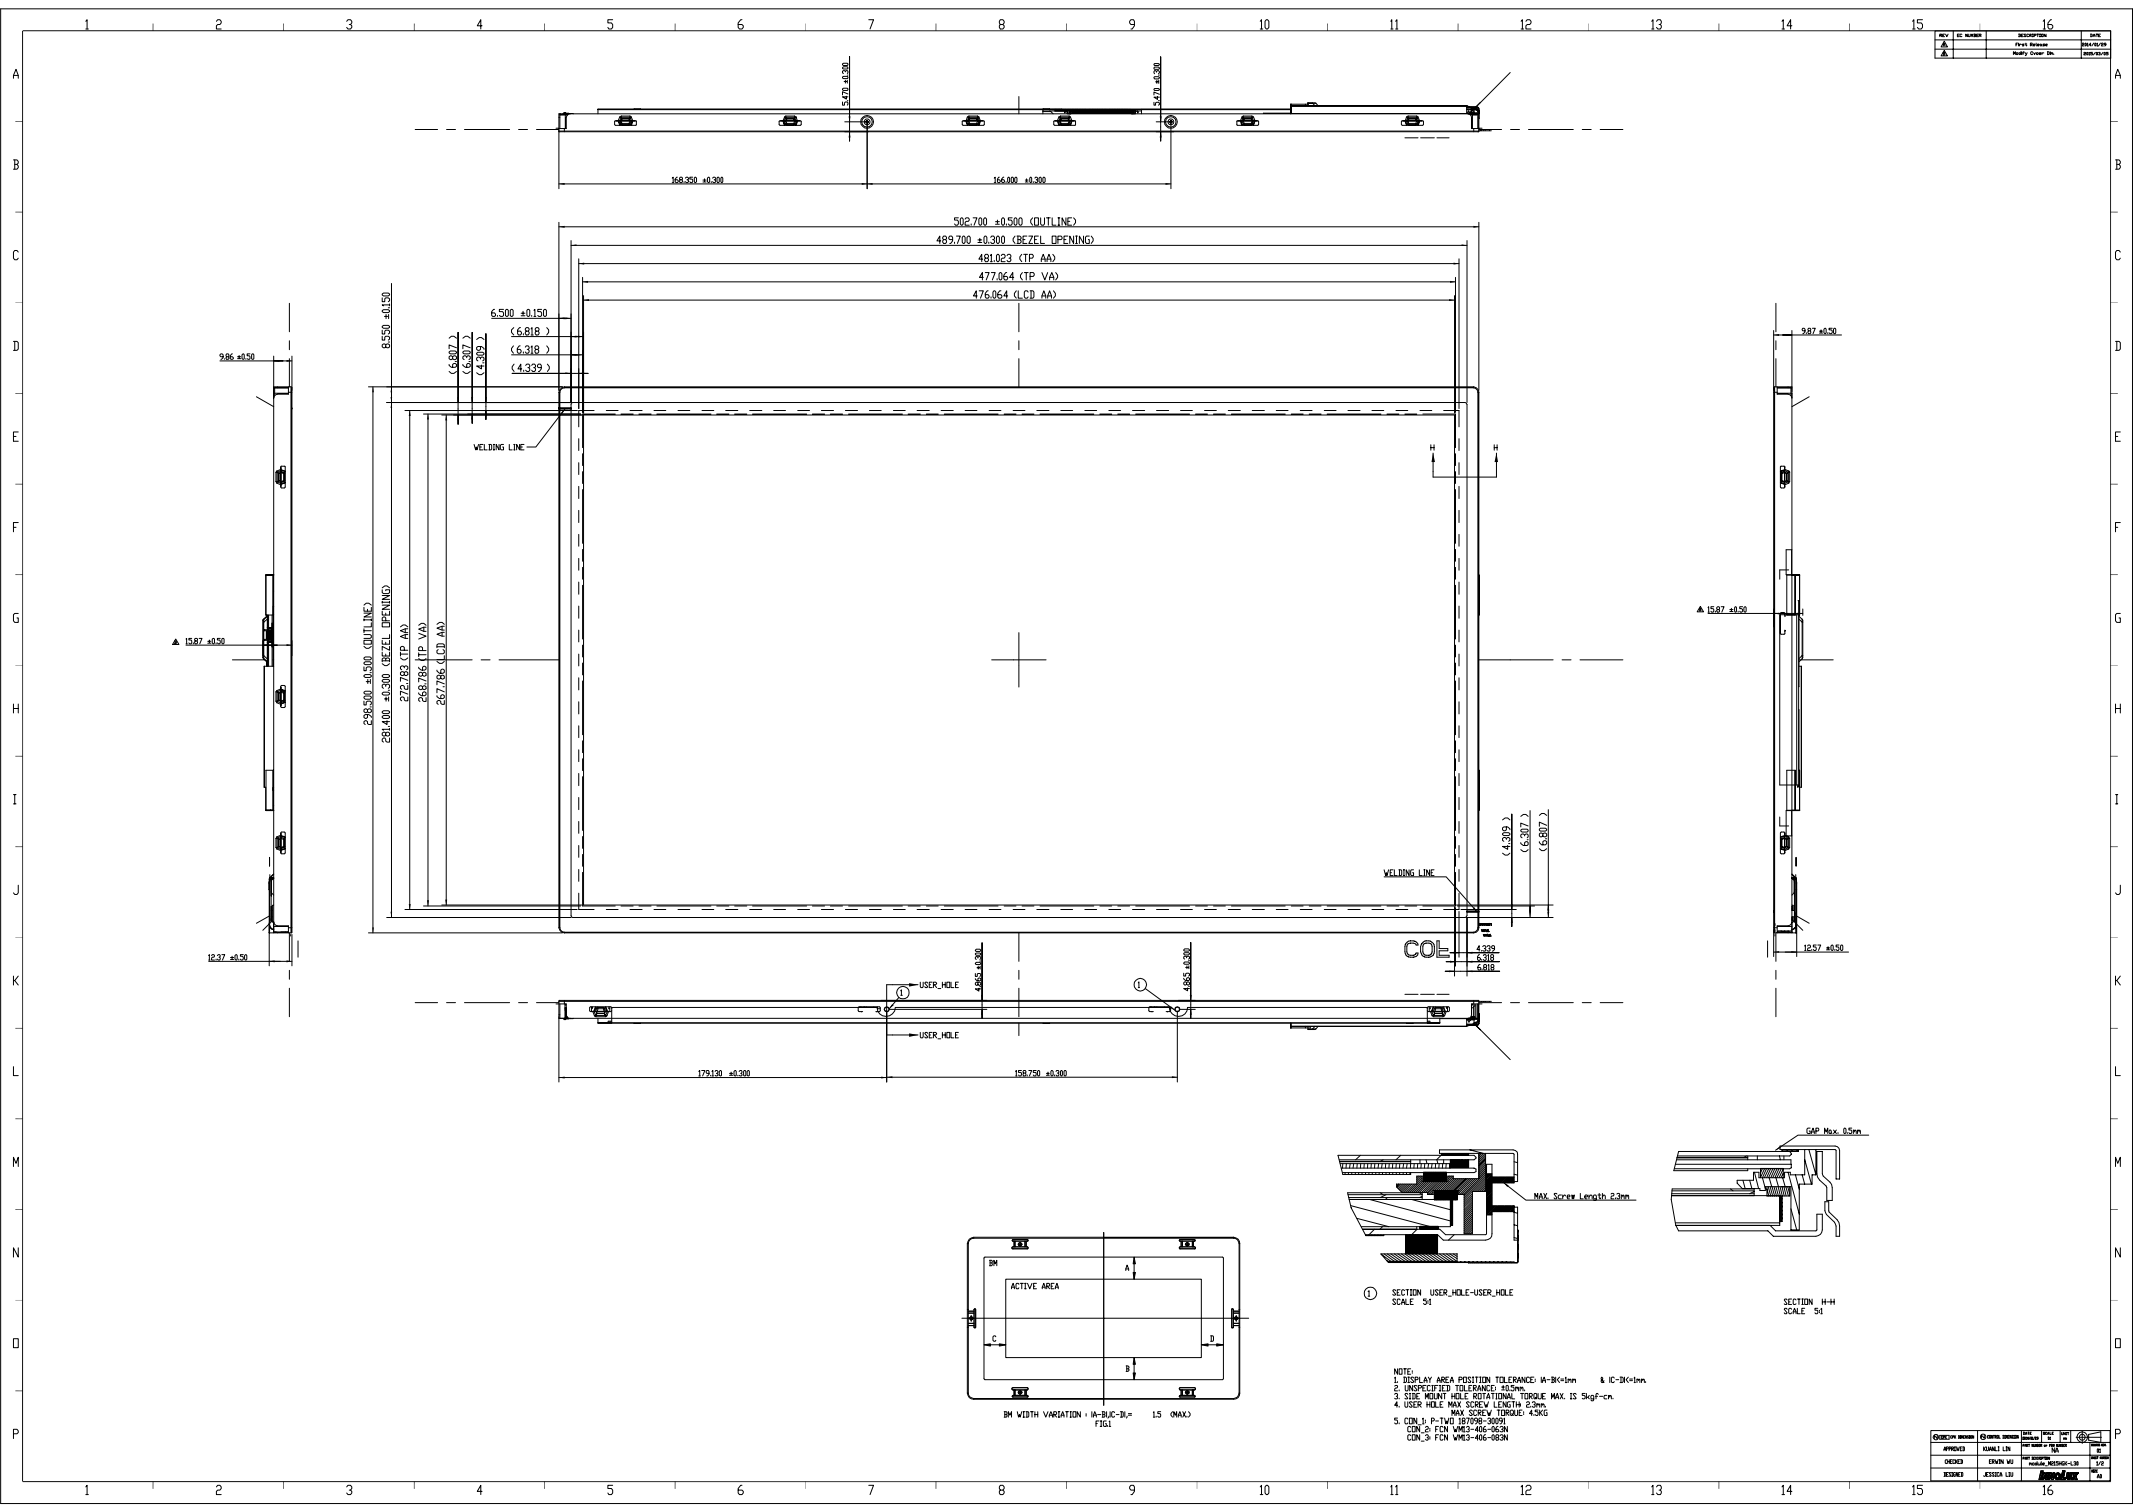


REV	REV NUMBER	DESCRIPTION	DATE
1		First Release	2014/01/20
2		Supply Change 1st	2014/01/20




- NOTE:
1. DISPLAY AREA POSITION TOLERANCE: H-B<1mm & H-C<1mm
 2. UNSPECIFIED TOLERANCE: H0.0mm
 3. SIDE MOUNT HOLE ROTATIONAL TORQUE MAX IS 5kgf-cm
 4. USER HOLE MAX SCREW LENGTH 2.2mm
 5. CON. 1: P-TWO 101090-300H MAX SCREW TORQUE 4.5KG
CON. 2: FEN VMS3-400-062N
CON. 3: FEN VMS3-400-062N

DESIGNER	DATE	REV	REV	REV	REV
APPROVED	2014/01/20	1	2	3	4
DESIGNED	2014/01/20	1	2	3	4
REVIEWED	2014/01/20	1	2	3	4

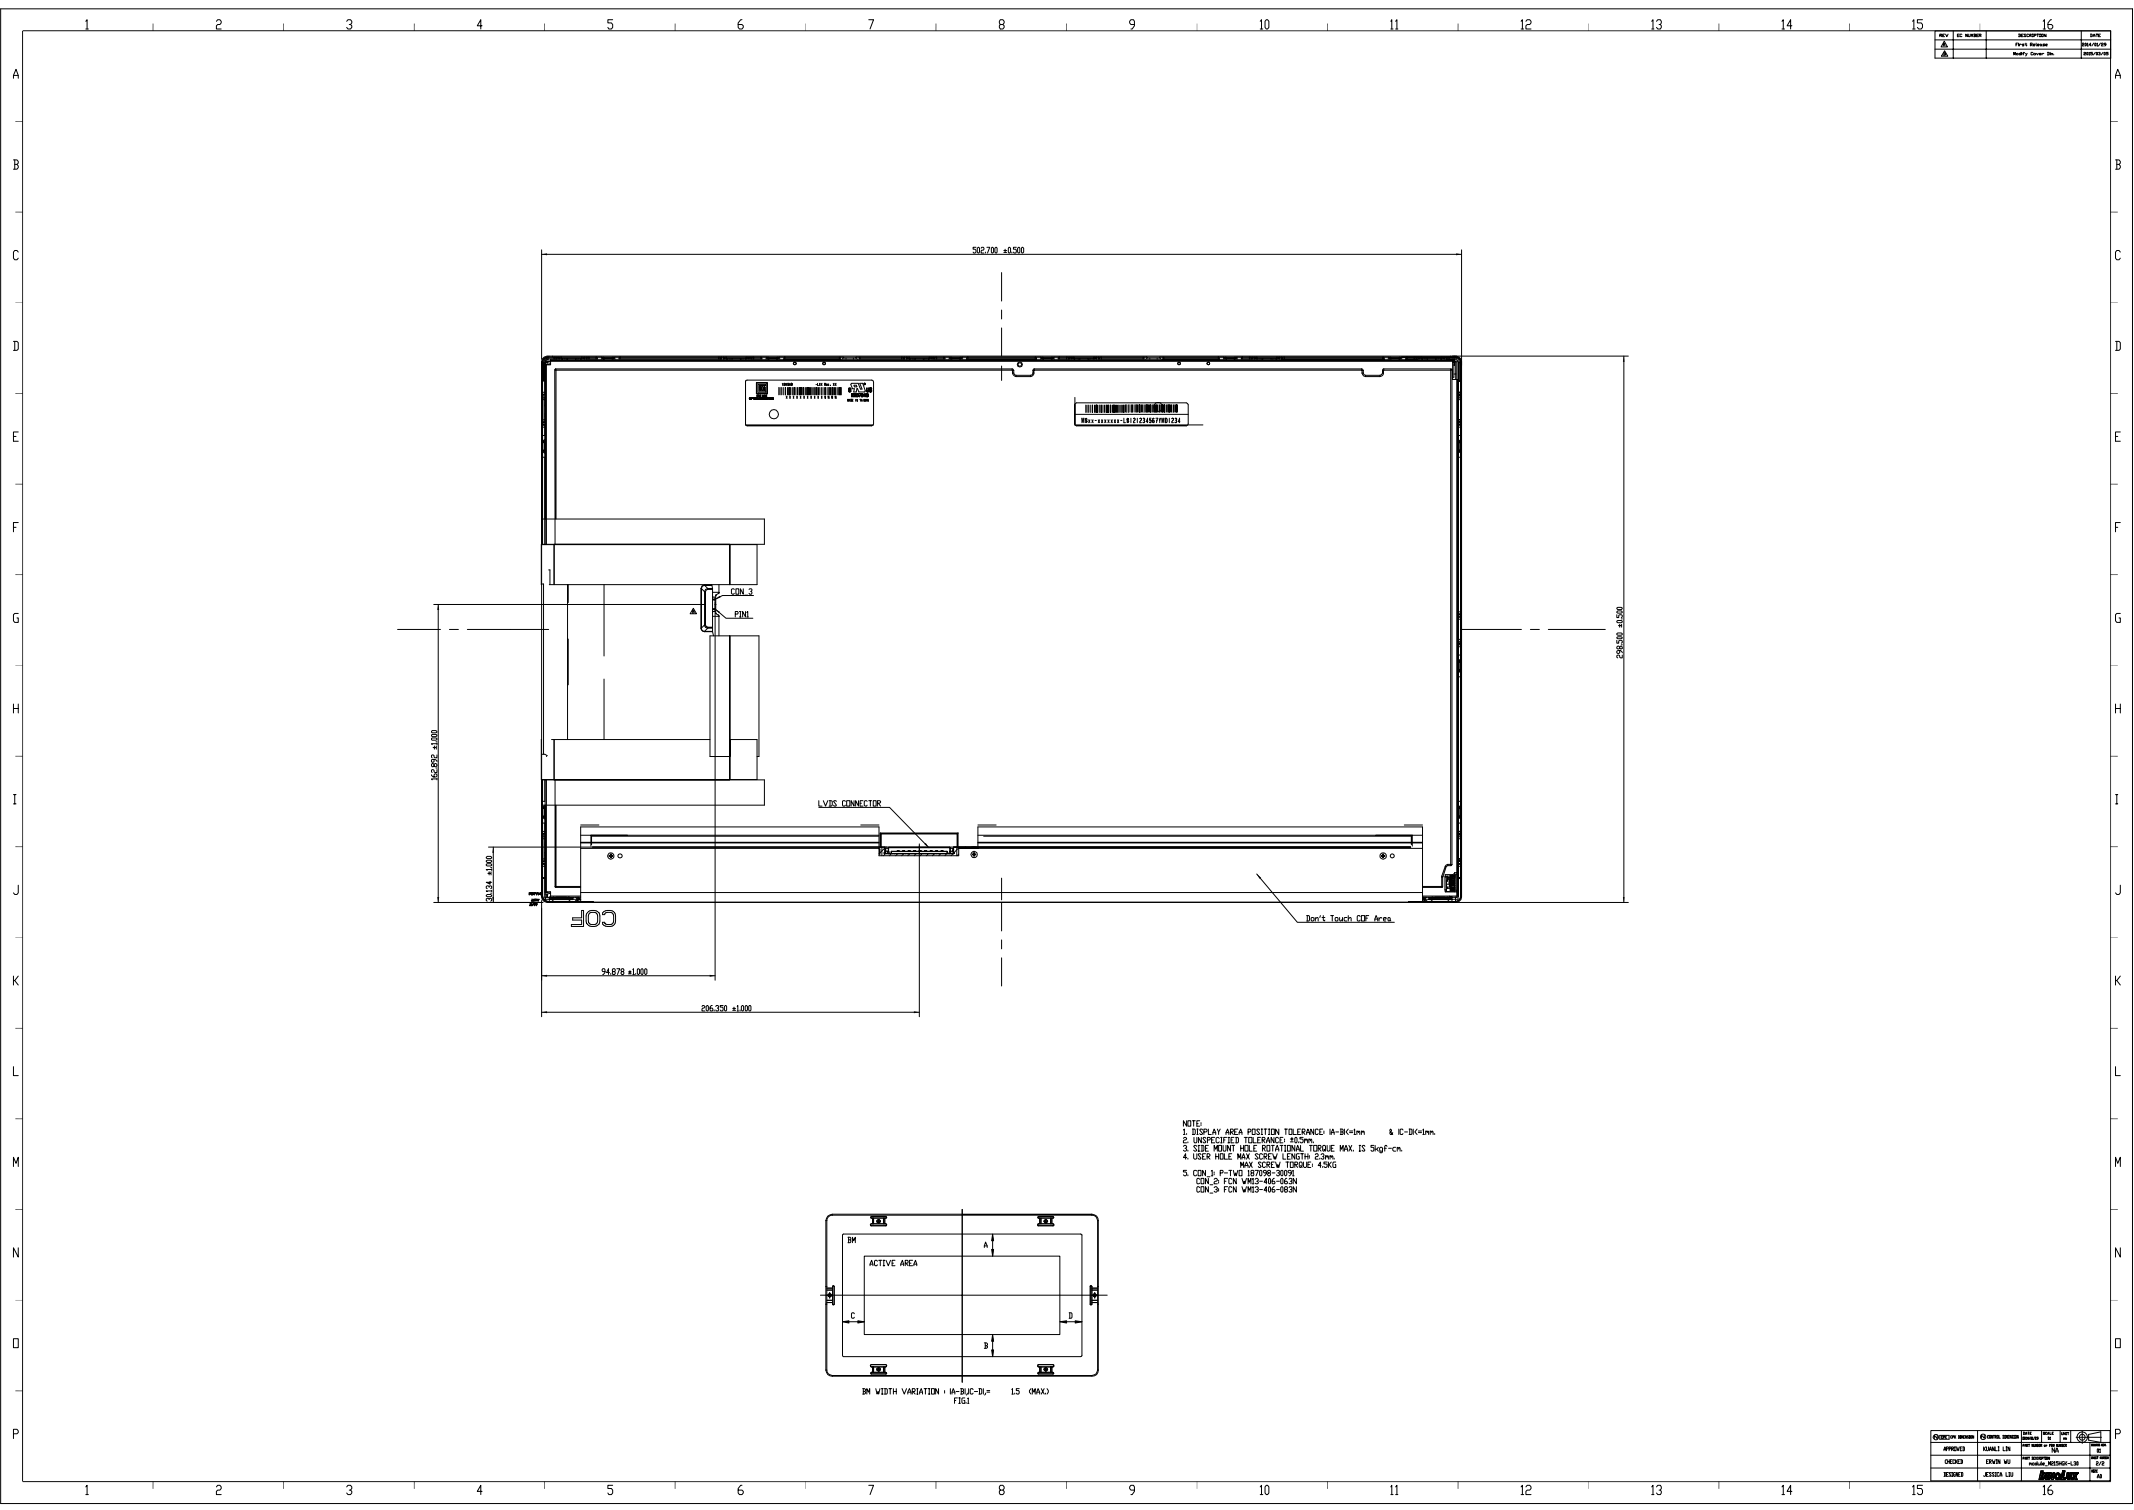

- NOTES:
1. DISPLAY AREA POSITION TOLERANCE: (A-B)<1mm & (C-D)<1mm
 2. UNSPECIFIED TOLERANCE: ±0.5mm
 3. SIZE MOUNT HOLE: ROTATIONAL TORQUE MAX. IS 5kgf-cm
 4. USER HOLE MAX. SCREW LENGTH: 2.5mm
MAX. SCREW TORQUE: 4.5KG
 5. CON. 3: P-TWO: 187098-3009;
CON. 2: FDN WMS-406-065N
CON. 1: FDN WMS-406-065N



REV	REV NUMBER	DESCRIPTION	DATE
A	1	First Release	2016/04/29
A		Quality Control OK	2016/04/29

OPERATION NUMBER	OPERATION NAME	UNIT	TIME	REMARKS
APPROVED	DESIGN LHM	100%	100%	100%
DESIGNED	DESIGN M2	100%	100%	100%
REWORK	DESIGN LHM	100%	100%	100%