CUSTOMER APPROVAL SHEET

Company Name	
MODEL	A050FW01 V6
CUSTOMER APPROVED	Title : Name :

- ☐ APPROVAL FOR SPECIFICATIONS ONLY (Spec. Ver.____)
- ☐ APPROVAL FOR SPECIFICATIONS AND ES SAMPLE (Spec. Ver.____)
- ☐ APPROVAL FOR SPECIFICATIONS AND CS SAMPLE (Spec. Ver.____)
- ☐ CUSTOMER REMARK :

AUO PM :

P/N : 91.05A04.600

Comment :

Doc. version :	0.2
Total pages :	17
Date :	2009/08/19

Product Specification

5.0" COLOR TFT-LCD MODULE/PANEL

MODEL NAME: A050FW01 V6

91.05A04.600

< >Preliminary Specification
< □ >Final Specification

Note: The content of this specification is subject to change.

Record of Revision

Version	Revise Date	Page	Content
0.0			First Draft
0.1		9	Revise Electrical DC Characteristics
0.2		10	Revise Timing Parameters

Contents

A. General Information

This is an amorphous transmissive type Thin Film Transistor Liquid crystal Display (TFT-LCD). This model is composed of a TFT-LCD, driver IC and FPC.

NO.	Item	Unit	Specification	Remark
1	Screen Size	inch	5.0(Diagonal)	
2	Display Resolution	dot	480RGB(H)×272(V)	
3	Overall Dimension	mm	116.0 (H) X 71.8 (V)	Note 1
4	Active Area	mm	109.44 (H) X 62.016 (V)	
5	Pixel Pitch	mm	0.076 (H) X 0.228 (V)	
6	Color Configuration	--	R. G. B. Stripe	Note 2
7	Color Depth	--	16.7M Colors	Note 3
8	NTSC Ratio (Cell)	%	54	
9	Display Mode	--	Normally White	
10	Panel surface Treatment	--	Anti-Glare, 3H	
11	Weight	g	24.5	
12	Panel Power Consumption	mW	160	Note 4
13	Viewing direction		6 o'clock (gray inversion)	

Note 1: Not include blacklight cable and FPC. Refer next page to get further information.

Note 2: Below figure shows dot stripe arrangement.

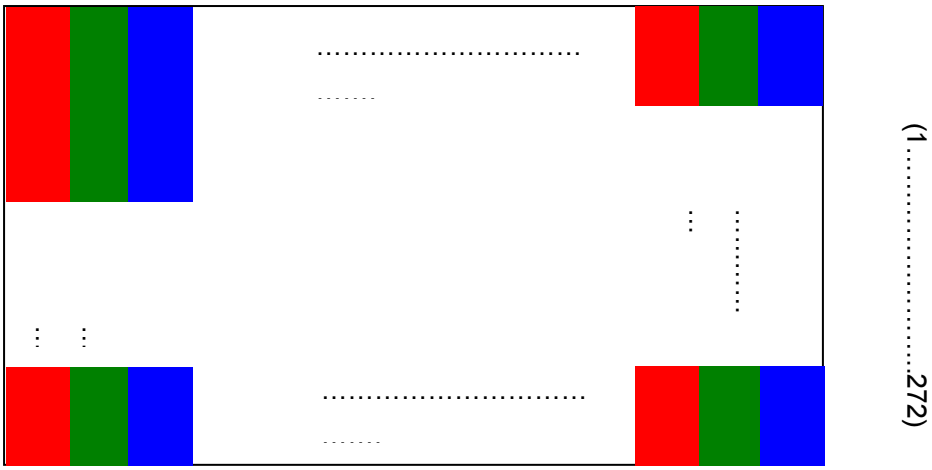

Note 3: The full color display depends on 24-bit data signal (pin 5~28).

Note 4: Please refer to Electrical Characteristics chapter.

B. Outline Dimension

1. TFT-LCD Module

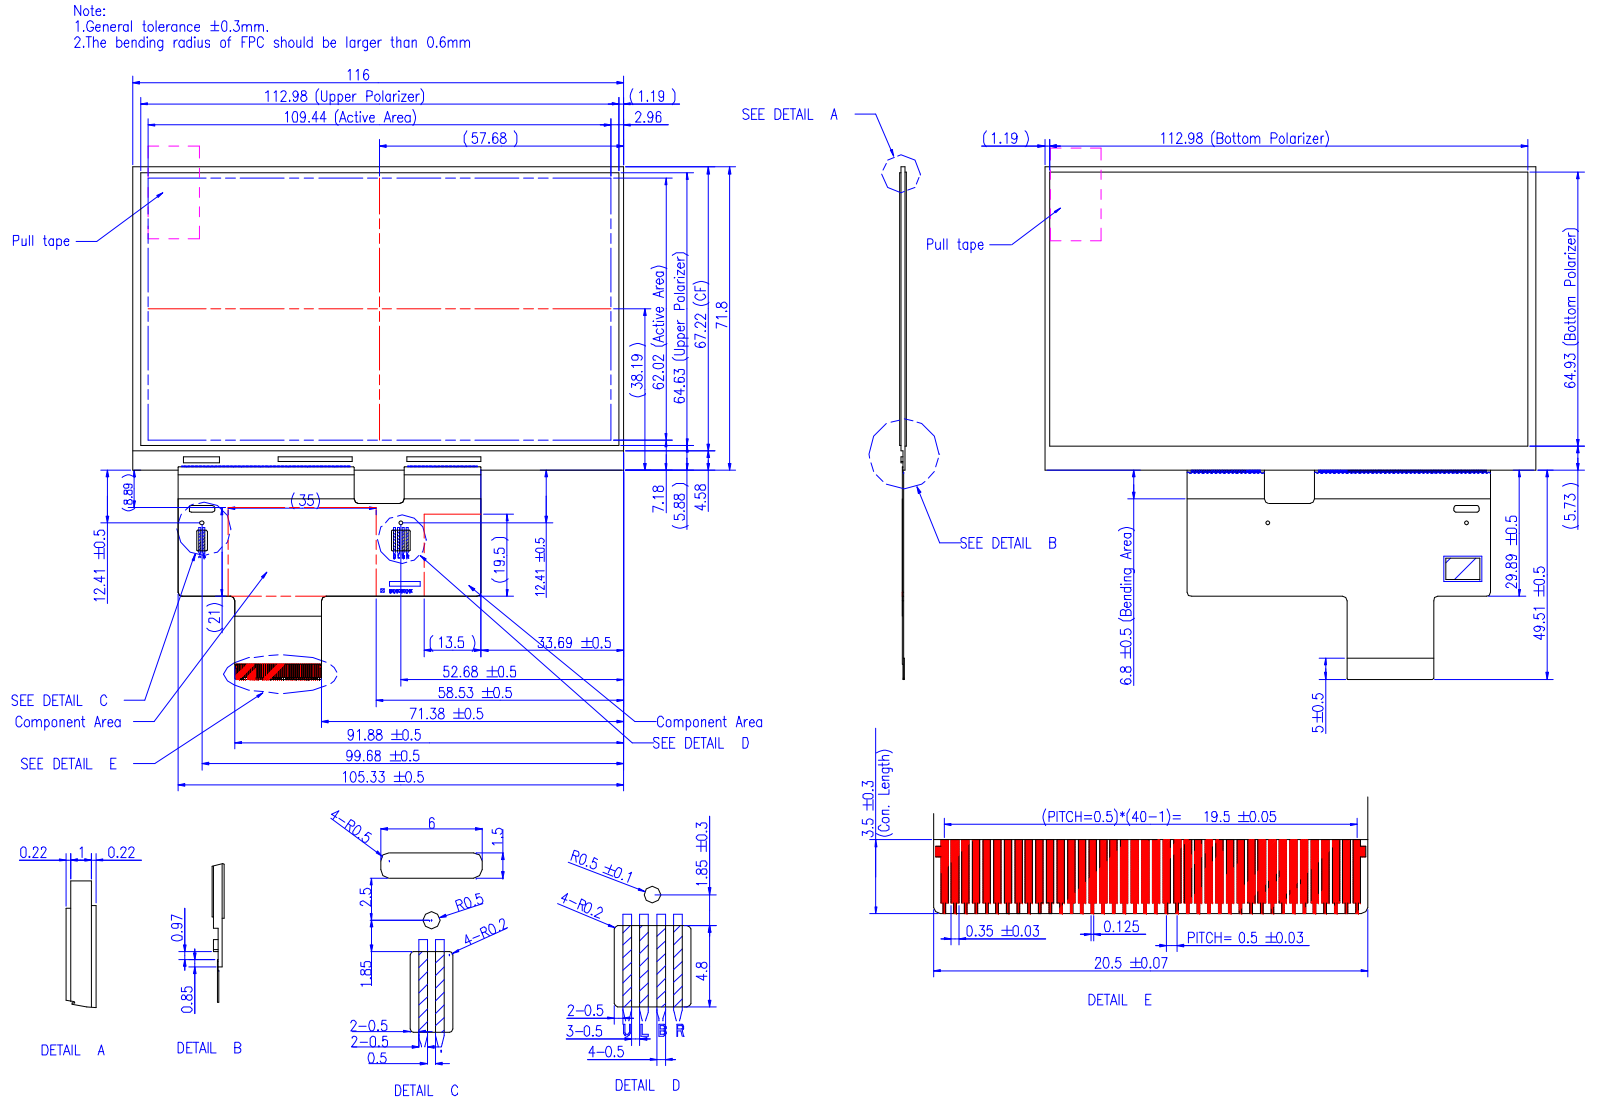

C. Electrical Specifications

1. TFT LCD Panel Pin Assignment

Recommended connector : FH12-40S-0.5SH

No.	Pin Name	I/O	Description	Remarks
1	VLED-	PI	LED backlight cathode	
2	VLED+	PI	LED backlight anode	
3	GND	G	Ground	
4	VDD	PI	Power Supply	
5	R0	I	Red Data (LSB)	
6	R1	I	Red Data	
7	R2	I	Red Data	
8	R3	I	Red Data	
9	R4	I	Red Data	
10	R5	I	Red Data	
11	R6	I	Red Data	
12	R7	I	Red Data (MSB)	
13	G0	I	Green Data (LSB)	
14	G1	I	Green Data	
15	G2	I	Green Data	
16	G3	I	Green Data	
17	G4	I	Green Data	
18	G5	I	Green Data	
19	G6	I	Green Data	
20	G7	I	Green Data (MSB)	
21	B0	I	Blue Data (LSB)	
22	B1	I	Blue Data	
23	B2	I	Blue Data	
24	B3	I	Blue Data	
25	B4	I	Blue Data	
26	B5	I	Blue Data	
27	B6	I	Blue Data	
28	B7	I	Blue Data (MSB)	
29	GND	G	Ground	
30	DCLK	I	Pixel Clock	
31	DISP	I	Display On/Off Signal	
32	NC		Not Connected	
33	NC		Not Connected	

No.	Pin Name	I/O	Description	Remarks
34	DE	I	Data Enable	
35	NC		Not Connected	
36	GND	G	Ground	
37	TP_R	I/O	Touch Panel Right Signal	
38	TP_B	I/O	Touch Panel Bottom Signal	
39	TP_L	I/O	Touch Panel Left Signal	
40	TP_U	I/O	Touch Panel Up Signal	

I: Digital signal input, I/O: Touch Panel input and output signal, G: GND, PI: Power input



Pin1 ~ Pin40

2. Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Max.	Unit	Remark
Power Voltage	VDD	GND=0	-0.3	4.5	V	
Input signal voltage	Data	GND=0	-0.3	3.6	V	Digital Signals

Note 1: Functional operation should be restricted under ambient temperature (25℃).

Note2: Maximum ratings are those values beyond which damages to the device may occur. Functional operation should be restricted to the limits in the Electrical Characteristics chapter.

3. Electrical DC Characteristics

a. Typical Operation Condition (GND = 0V)

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
Power Voltage		VDD	3.1	3.3	3.5	V	
Input Signal Voltage	H Level	VIH	0.7 x VDD	--	VDD	V	
	L Level	VIL	GND	--	0.3 x VDD	V	

b. Current Consumption (GND=0V)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Input Current for VDD	I_{VDD}	VDD=3.3V	-	37	48	mA	Note 1, 2

Note 1:Test Condition is under typical Eletrical DC and AC characteristics.

Note 2: Test pattern is the following picture.

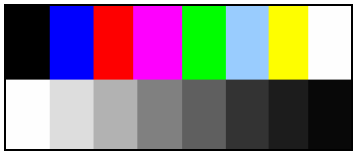

4. Electrical AC Characteristics

a. Signal AC Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK duty cycle	--	40	50	60	%	t_{cw} / t_{DCLK} x100%
DE setup time	t_{desu}	10	--	--	ns	
DE hold time	t_{dehd}	10	--	--	ns	
Data setup time	t_{dst}	10	--	--	ns	
Data hold time	t_{dhd}	10	--	--	ns	

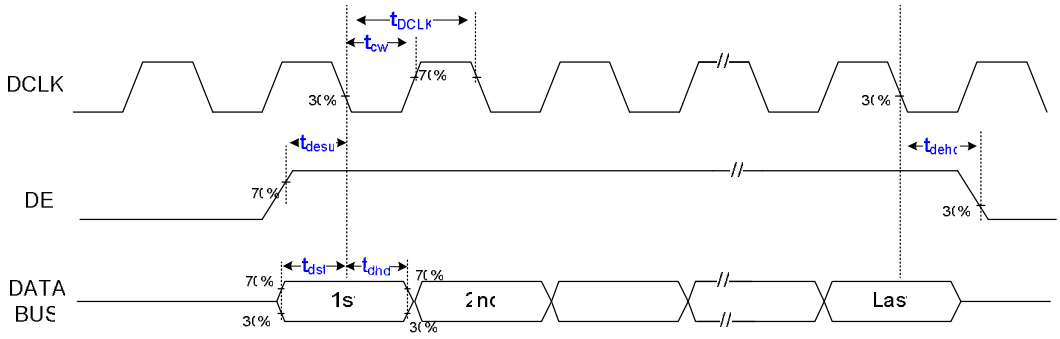

t_{DCLK}: DCLK period

t_{cw}: the width of DCLK high

b. Input Timing

Vertical Timing of Input

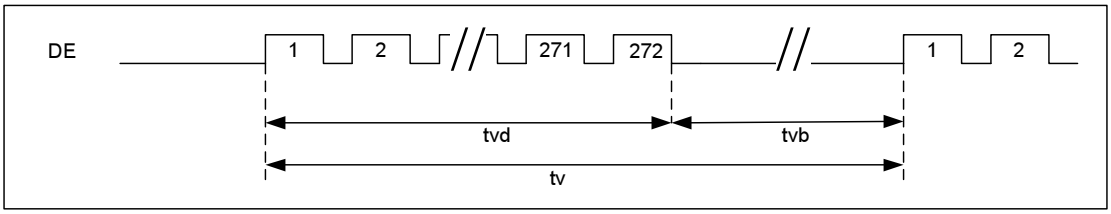

Horizontal Timing of Input

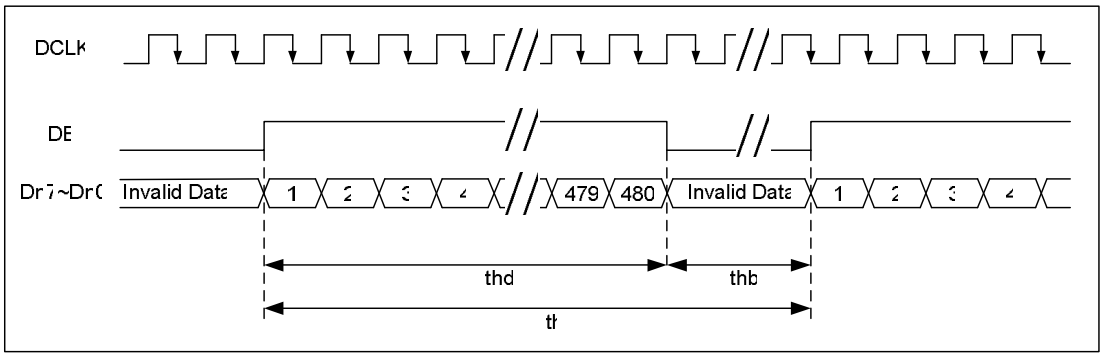

Timing Parameters

PARAMETER	Symbol	Min	Typ	Max	Unit
Clock cycle	1/tc	-	9	15	MHz
Horizontal cycle	1/fh	-	17.14	-	KHz
Vertical cycle	1/fv	-	59.94	-	Hz
Horizontal Signal					
Horizontal cycle *1	th	500	525	580	DCLK
Horizontal display period	thd	480	480	480	DCLK
Horizontal blank	thb	20	45	100	DCLK
Vertical Signal					
Vertical cycle	tv	286	286	300	H
Vertical display period	tvd	272	272	272	H
Vertical blank	tvb	14	14	28	H

6. Power On/Off Characteristics

a. Recommended Power On Sequence

The LCD apopts high voltage driver IC, so it could be permanently damaged under a wrong power on/off sequence. The suggested LCD power sequence is below：

Power on sequence: VDD→DCLK→DISP→ LED UNIT.

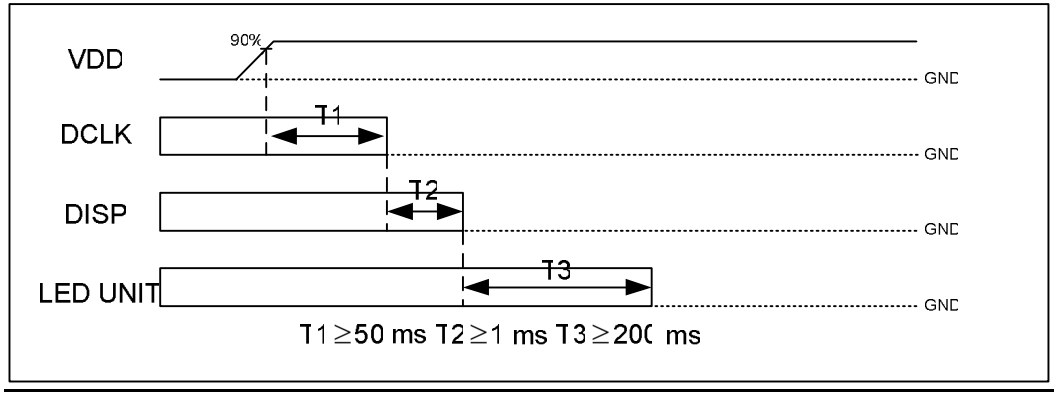

b. Recommended Power Off Sequence

Power off sequence: LED UNIT→DISP →DCLK→ VDD.

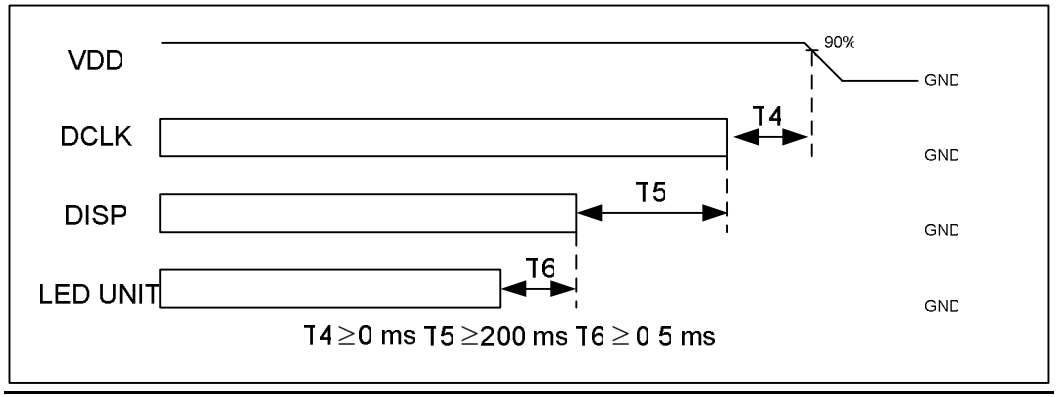

D. Optical Specification

All optical specification is measured under typical condition (Note 1, 2)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Response Time								
Rise		Tr	θ=0°	--	7	--	ms	Note 3
Fall		Tf		--	23	--	ms	
Contrast ratio		CR	At optimized viewing angle	200	300	--		Note 4
Viewing Angle	Top		CR□10	30	40	--	deg.	Note 5
	Bottom			50	60	--		
	Left			60	70	--		
	Right			60	70	--		
Transmittance		%	θ=0°	--	6.89	--	%	Note 6

Note 1: Ambient temperature =25℃, and LED lightbar voltage V_L = 12 V. To be measured in the dark room.

Note 2: To be measured on the center area of panel with a viewing cone of 1° by Topcon luminance meter **BM-5A**, after 15 minutes operation.

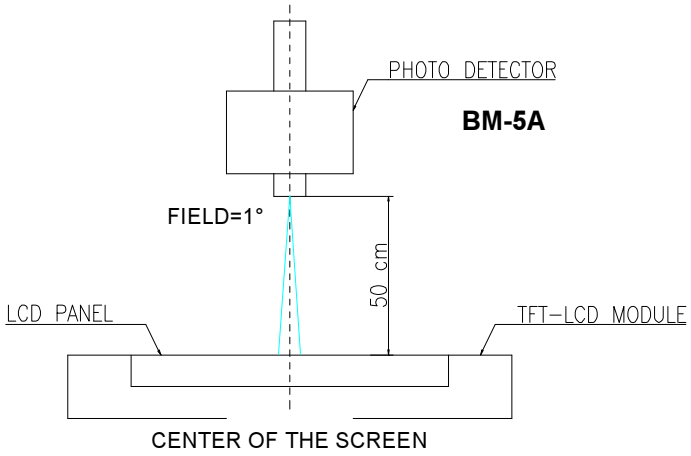

Note 3: Definition of response time:

The output signals of photo detector are measured when the input signals are changed from “black” to “white”(falling time) and from “white” to “black”(rising time), respectively.

The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figure as below.

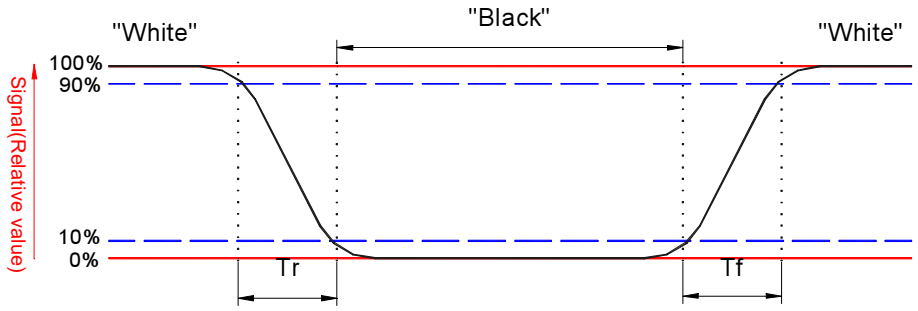

Note 4.Definition of contrast ratio:

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" status}}{\text{Photo detector output when LCD is at "Black" status}}$$

Note 5. Definition of viewing angle, θ, Refer to figure as below.

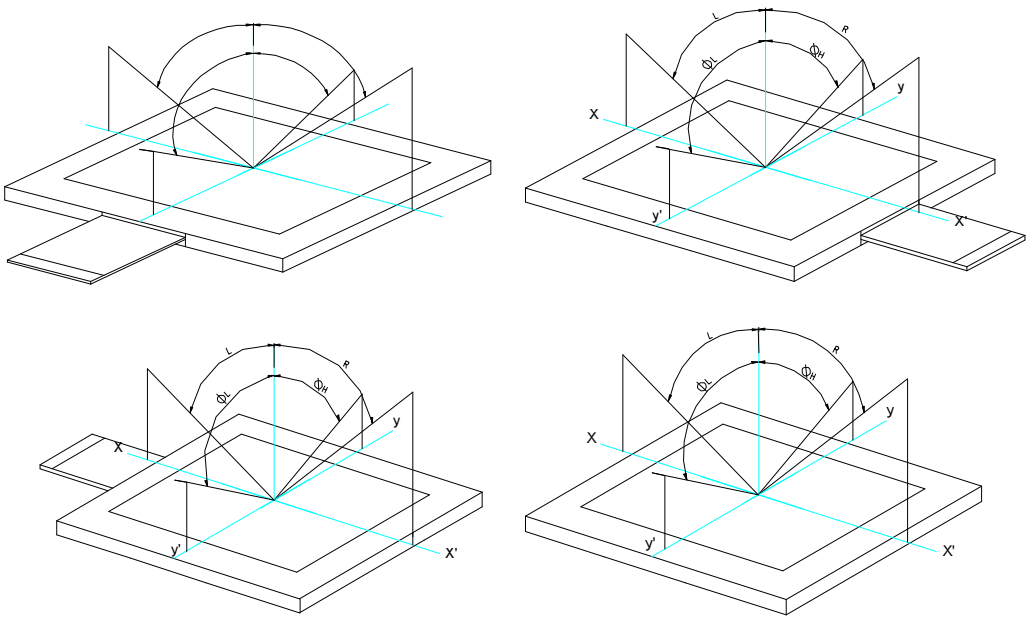

Note 6. same to Note 2.

E. Reliability Test Items

No.	Test items	Conditions	Remark
1	High Temperature Storage	Ta= 80□ 240Hrs	
2	Low Temperature Storage	Ta= -40□ 240Hrs	
3	High Ttemperature Operation	Tp= 70□ 240Hrs	
4	Low Temperature Operation	Ta= -20□ 240Hrs	
5	High Temperature & High Humidity	Tp= 60℃, 90% RH 240Hrs	Operation
6	Heat Shock	-30℃~80℃/50 cycles 1Hrs/cycle	Non-operation
8	Image Sticking	25□, 4hrs	Note 4
11	Vibration (With Carton)	Random vibration: 0.015G^2/Hz from 5~200Hz –6dB/Octave from 200~500Hz	IEC 68-34
12	Drop (With Carton)	Height: 60cm 1 corner, 3 edges, 6 surfaces	

Note 1: Ta: Ambient Temperature. Tp: Panel Surface Temperature

Note 2: In the standard conditions, there is not display function NG issue occurred. All the cosmetic specification is judged before the reliability stress.

Note 3: All the cosmetic specification is judged before the reliability stress.

Note 4: Operate with chess board pattern as figure and lasting time and temperature as the conditions. Then judge with 50% gray level, the mura is less than JND 2.5



F. Packing and Marking

1. Packing Form

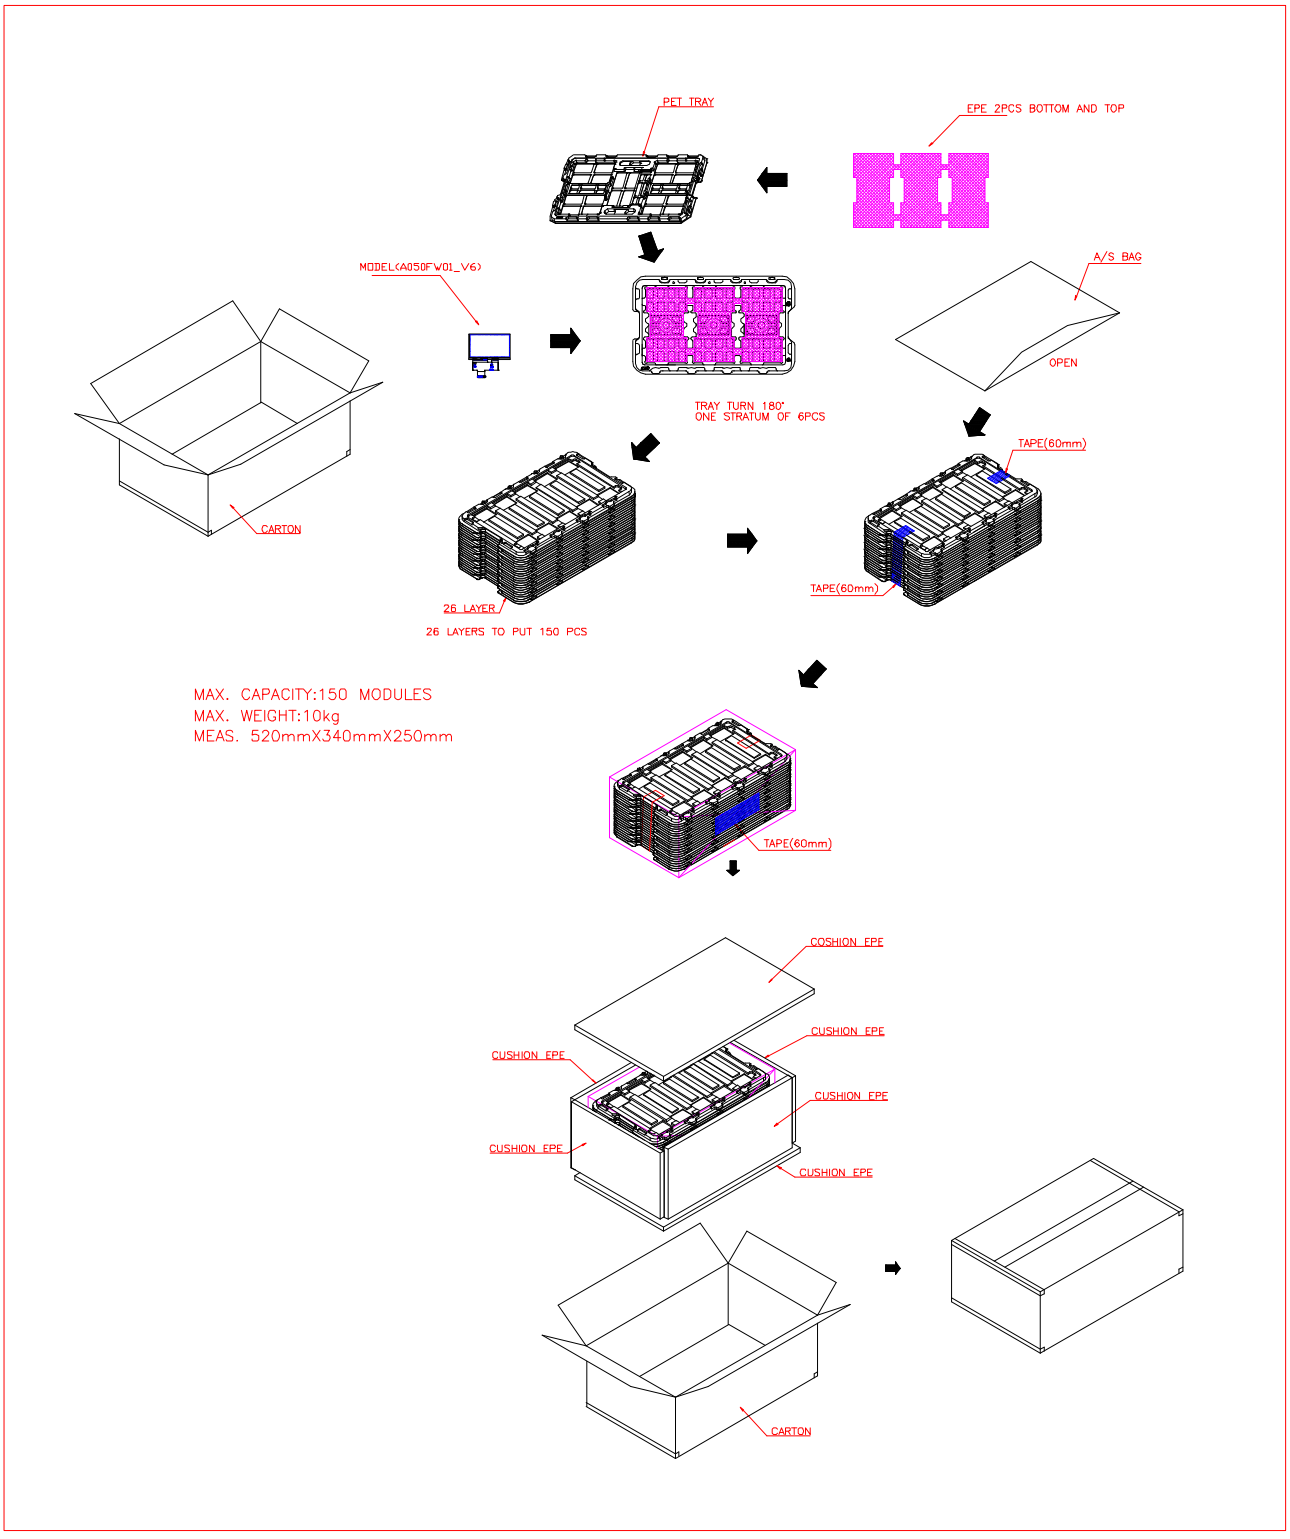

G. Application Note

1. Application Circuit

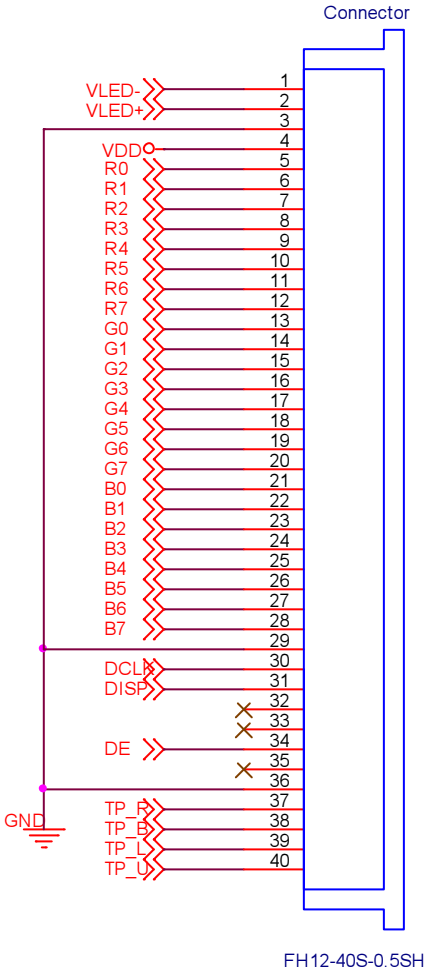

2. System block

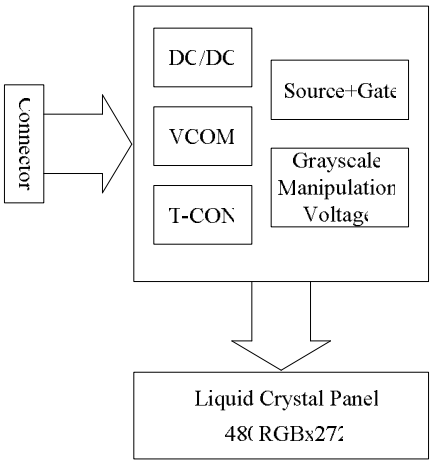

H. Precautions

1. Do not twist or bend the module and prevent the unsuitable external force for display module during assembly.
2. Adopt measures for good heat radiation. Be sure to use the module with in the specified temperature.
3. Avoid dust or oil mist during assembly.
4. Follow the correct power sequence while operating. Do not apply the invalid signal, otherwise, it will cause improper shut down and damage the module.
5. Less EMI: it will be more safety and less noise.
6. Please operate module in suitable temperature. The response time & brightness will drift by different temperature.
7. Avoid to display the fixed pattern (exclude the white pattern) in a long period, otherwise, it will cause image sticking.
8. Be sure to turn off the power when connecting or disconnecting the circuit.
9. Polarizer scratches easily, please handle it carefully.
10. Display surface never likes dirt or stains.
11. A dewdrop may lead to destruction. Please wipe off any moisture before using module.
12. Sudden temperature changes cause condensation, and it will cause polarizer damaged.
13. High temperature and humidity may degrade performance. Please do not expose the module to the direct sunlight and so on.
14. Acetic acid or chlorine compounds are not friends with TFT display module.
15. Static electricity will damage the module, please do not touch the module without any grounded device.
16. Do not disassemble and reassemble the module by self.
17. Be careful do not touch the rear side directly.
18. No strong vibration or shock. It will cause module broken.
19. Storage the modules in suitable environment with regular packing.
20. Be careful of injury from a broken display module.
21. Please avoid the pressure adding to the surface (front or rear side) of modules, because it will cause the display non-uniformity or other function issue.