



Document Title	HSD150SX84-B Product Information	Page No.	1 / 32
Document No.		Revision	

HannStar Product Information

**Model : HSD150SX84
-B**

ISSUE DATE: 2002-06-01

- Note :
1. The information contained herein is preliminary and may be changed without prior notices.
 2. Please contact HannStar Display Corp. before designing your product based on this module specification.
 3. The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by HannStar for any intellectual property claims or other problems that may result from application based on the module described herein.



Document Title	HSD150SX84-B Product Information	Page No.	2 / 32
Document No.		Revision	

Record of Revisions

Rev.	Updated No.	Date	Description of change
		2002/4/2	First release.
		2002/4/9	Page 17, Lamp typical voltage changes from 750 to 760. Page 26, change distance of JN1 & JN2 to center line from 77.7 to 76.3 mm. Page 27, panel label part name modifies from HSD150SX84-A to HSD150SX84-B.
		2002/4/19	Page 4, 5, panel thickness of outline dimension change from 10.2(max.) to 10.5(typ.) weight change from 960g(max.) to 950g(typ.) Page 7 Add max. response time $T_R=10ms$ & $T_F=15ms$. Add min. white luminance 200. Color chromaticity changed
		2002/6/1	Page 17, 25°C lamp start voltage change to 1300V. Page 24, Change 50ms of T2 and T3 to minimum value. Page 26, Add BM specification as 7.2.
		2002/6/24	Page 29, Add specification for package specification. Page 26 Modify Back view drawing Page 17 Change lamp life time from 50000 to 30000.



Document Title	HSD150SX84-B Product Information	Page No.	3 / 32
Document No.		Revision	

Contents

1.0	General descriptions	p.4
2.0	Absolute maximum ratings	p.5
3.0	Optical characteristics	p.7
4.0	Block diagram	p.12
5.0	I/O Connection Pin assignment	p.15
6.0	Electrical Characteristics.....	p.17
7.0	Outline dimension	p.25
8.0	Lot Mark	p.28
9.0	Package specification	p.29
10.0	General precaution	p.31

Document Title	HSD150SX84-B Product Information	Page No.	4 / 32
Document No.		Revision	

1.0 GENERAL DESCRIPTIONS

1.1 Introduction

HannStar Display model **HSD150SX84-A** is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, the voltage reference, common voltage, DC-DC converter, column, and row driver circuit. This TFT LCD has a 15-inch diagonally measured active display area with XGA resolution (768 vertical by 1024 horizontal pixel array).

1.2 Features

- 15" XGA TFT LCD panel
- 2 CCFLs Backlight system
- Supported XGA (V:768 lines, H:1024 pixels) resolution
- Supported to 75Hz refresh rate
- Without LCD Timing Controller

1.3 General information

Item	Specification	Unit
Outline dimension	321.0x 249.0x 10.5 (typ.)	mm
Display area	304.1(H) x 228.1(V) (15.0" diagonal)	mm
Number of Pixel	1024(H) x 768(V)	pixels
Pixel pitch	0.297(H) x 0.297(V)	mm
Pixel arrangement	RGB Vertical stripe	
Display color	6-bits driver	
Display mode	Normally white	
Surface treatment	Antiglare, Hard-Coating(3H)	
Weight	950g (typ.)	g
Back-light	2-CCFLs, Top & bottom edge side	
Input signal	Source and Gate Driver control signals	
Power consumption	11W (typ.), with back light	W
Optimum viewing direction	6 o'clock	

1.4 Applications

- Desktop monitors
- Display terminals for AV applications
- Monitors for industrial applications

Document Title	HSD150SX84-B Product Information	Page No.	5 / 32
Document No.		Revision	

1.5 Mechanical Information

Item		Min.	Typ.	Max.	Unit
Module Size	Horizontal(H)	320.5	321.0	321.5	mm
	Vertical(V)	248.5	249.0	249.5	mm
	Depth(D)	--	10.5	--	mm
Weight (without inverter)		--	950	--	g


2.0 ABSOLUTE MAXIMUM RATINGS

2.1 Absolute Rating of Environment

Item	Symbol	Min.	Max.	Unit	Note
Storage temperature	T _{STG}	-20	60	°C	
Operating temperature	T _{OPR}	0	50	°C	
Vibration(non-operating)	V _{NOP}	--	1.5	G	(1)
Shock(non-operating)	S _{NOP}	--	70	G	(2)
Storage humidity	H _{STG}	10	90	%RH	(3)
Operating humidity	H _{OP}	10	80	%RH	(3)
Low pressure(operating)	P _{LOP}	697	--	HPa	(4)
Low pressure(non-operating)	P _{LNOP}	116	--	HPa	(5)

- Note
- (1) 5-500Hz sine wave, X,Y,Z each directions, 30 min/cycle.
 - (2) 11ms, ±X, ±Y, ±Z direction, one time each. For this shock test, it is necessary to fill the silicon rubber between the shock jig as buffer.
 - (3) Max wet bulb temp. =39°C
 - (4) 2 hrs. (10000 feet)
 - (5) 24hrs. (50000 feet)

Document Title	HSD150SX84-B Product Information	Page No.	6 / 32
Document No.		Revision	

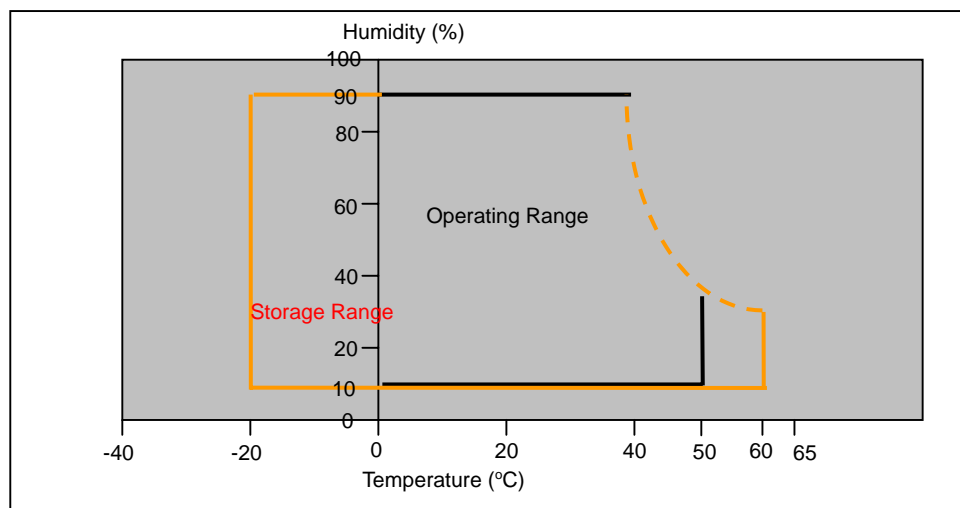

2.2 Electrical Absolute Rating:

2.2.1 TFT LCD Module:

Item	Symbol	Condition	Value		Unit
			min.	max.	
Input Power Voltage	V_{DD}	Normal	+3.0	+3.8	V(DC)
Logic Signal input voltage	V_{SIG}	Normal	-0.3	$V_{DD} + 0.3$	V

2.2.2 Back Light Unit:

Item	Symbol	Min.	Max.	Unit	Note
Lamp voltage	V_L	0	2000	V(rms)	(1)
Lamp current	I_L	-	7.0	mA	(1)
Lamp frequency	f_L	0	100	KHz	(1)

Note: (1) Permanent damage may occur to the LCD module if beyond this specification. Functional operation should be restricted to the conditions described under Normal Operating Conditions.

Document Title	HSD150SX84-B Product Information	Page No.	7 / 32
Document No.		Revision	

3.0 OPTICAL CHARACTERISTICS

3.1 Measuring Condition

- Measuring surrounding : dark room
- Lamp current I_{BL} : (6.0)±0.1mA, lamp freq. F_L =50KHz
- V_{DD1} =3.3V, f_V =60Hz, f_{DCLK} =32.5MHz
- Surrounding temperature : 25±2°C
- 30min. Warm-up time.

3.2 Measuring Equipment


- LCD-7000 of Otsuka Electric Corp., which utilized MCPD-7000 for Chromaticity and BM-5A for other optical characteristics.
- Measuring spot size : 10~12mm

3.3 Optical specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast		CR	=0° φ=0° Normal viewing angle	300	400	--		(1)(2)
Response time	Rising	T _R		--	TR +TF =(35)	10	msec	(1)(3)
	Falling	T _F		--		35		
White luminance (center of screen)		Y _L		200	250	--	cd/m ²	(1)
Color chromaticity (CIE1931)	Red	R _x		0.593	0.623	0.653		(1)(4)
		R _y		0.305	0.335	0.365		
	Green	G _x		0.263	0.293	0.323		
		G _y		0.569	0.599	0.629		
	Blue	B _x		0.114	0.144	0.174		
		B _y		0.083	0.113	0.143		
	White	W _x	0.280	0.310	0.340			
		W _y	0.300	0.330	0.360			
Viewing angle	Hor.	L	CR>10	--	65	--		
		R		--	65	--		
	Ver.	H		--	45	--		
		L		--	55	--		
Brightness uniformity		B _{UNI}	=0°	70	75	--	%	(5)
Crosstalk		CT(n)	φ=0°	--	--	1.3	%	(6)

Document Title	HSD150SX84-B Product Information	Page No.	8 / 32
Document No.		Revision	

Note (1) Definition of Viewing Angle:

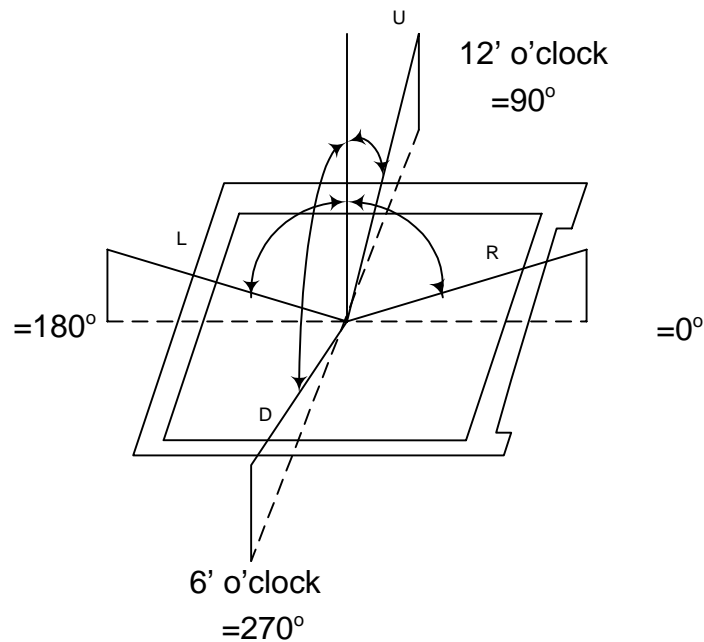


Note (2) Definition of Contrast Ratio(CR) :
measured at the center point of panel


$$CR = \frac{\text{Luminance with all pixels white (L63)}}{\text{Luminance with all pixels black (L0)}}$$

Document Title	HSD150SX84-B Product Information	Page No.	9 / 32
Document No.		Revision	

Note (3) Definition of Response Time: Sum of T_R and T_F

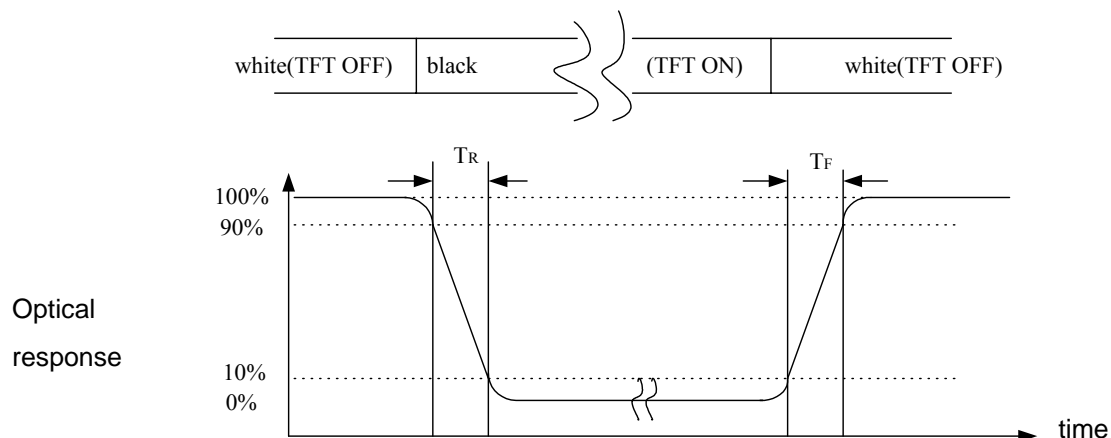


Note (4) Optical characteristic measurement setup

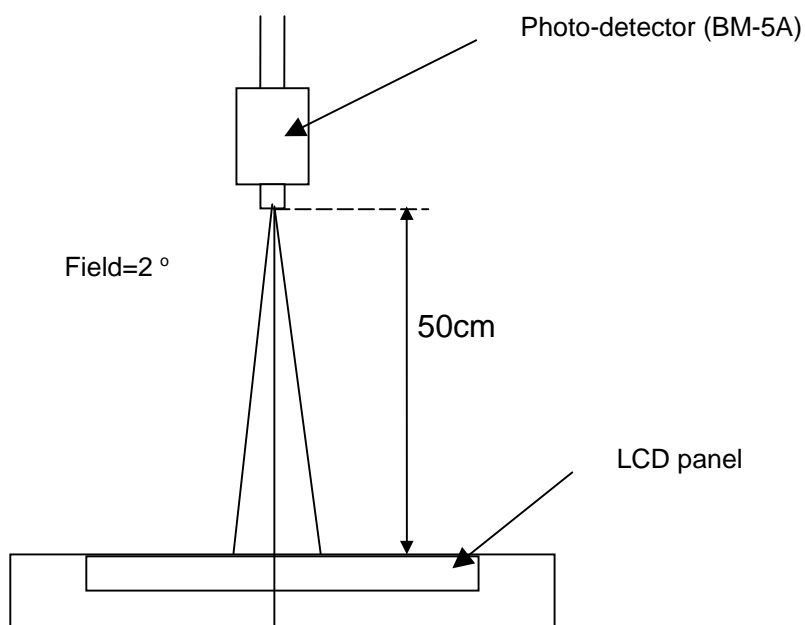

Document Title	HSD150SX84-B Product Information	Page No.	10 / 32
Document No.		Revision	

Note (5) Definition of brightness uniformity

Luminance uniformity =(Min Luminance)/(Max Luminance) x 100%

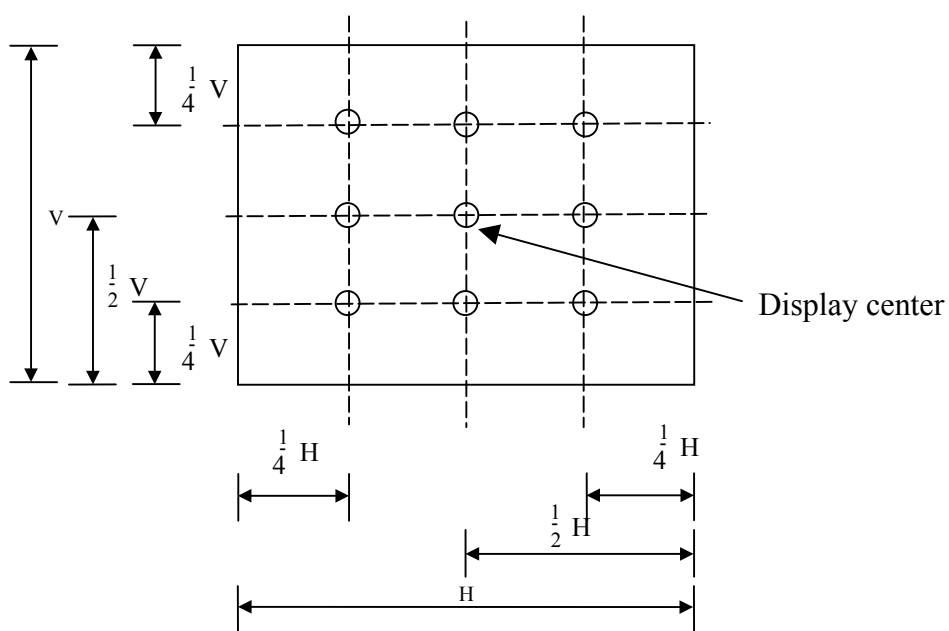

Document Title	HSD150SX84-B Product Information	Page No.	11 / 32
Document No.		Revision	

Note (6) Definition of crosstalk CT (1) ~ CT (4)

$$CT(n) = \frac{|L(n) - LB(n)|}{L(n)} \times 100\%, n = 1 \sim 4$$


Where L(n) = Luminance of point “n” at pattern A (cd/m²) , n=1 ~ 4

LB(n) = Luminance of point “n” at pattern B (cd/m²) , n=1 ~ 4


The location measured will be exactly the same in both patterns.

L0: Luminance with all pixels black

L63: Luminance with all pixels white

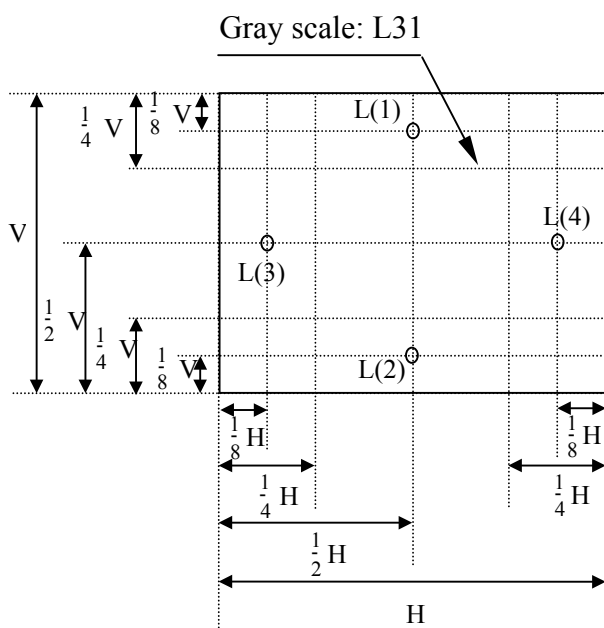

Pattern A

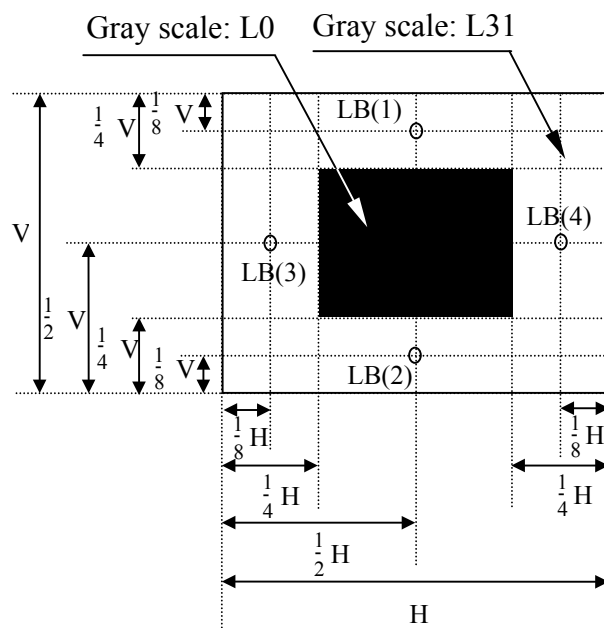


Pattern B

Document Title	HSD150SX84-B Product Information	Page No.	12 / 32
Document No.		Revision	


4.0 BLOCK DIAGRAM

4.1 LCD Module Block Diagram:

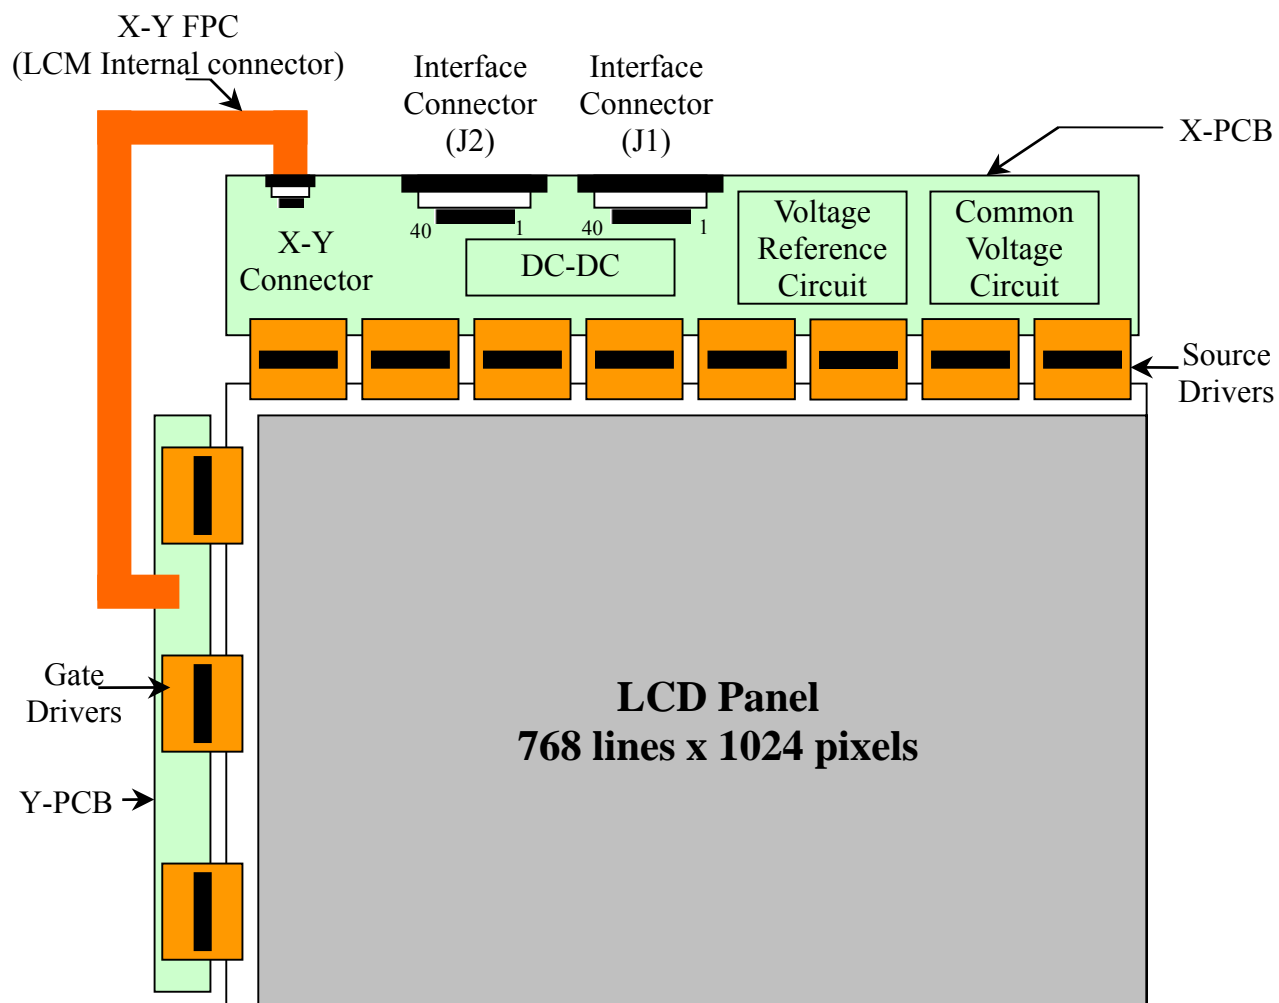

Document Title	HSD150SX84-B Product Information	Page No.	13 / 32
Document No.		Revision	

4.2 Pixel Format

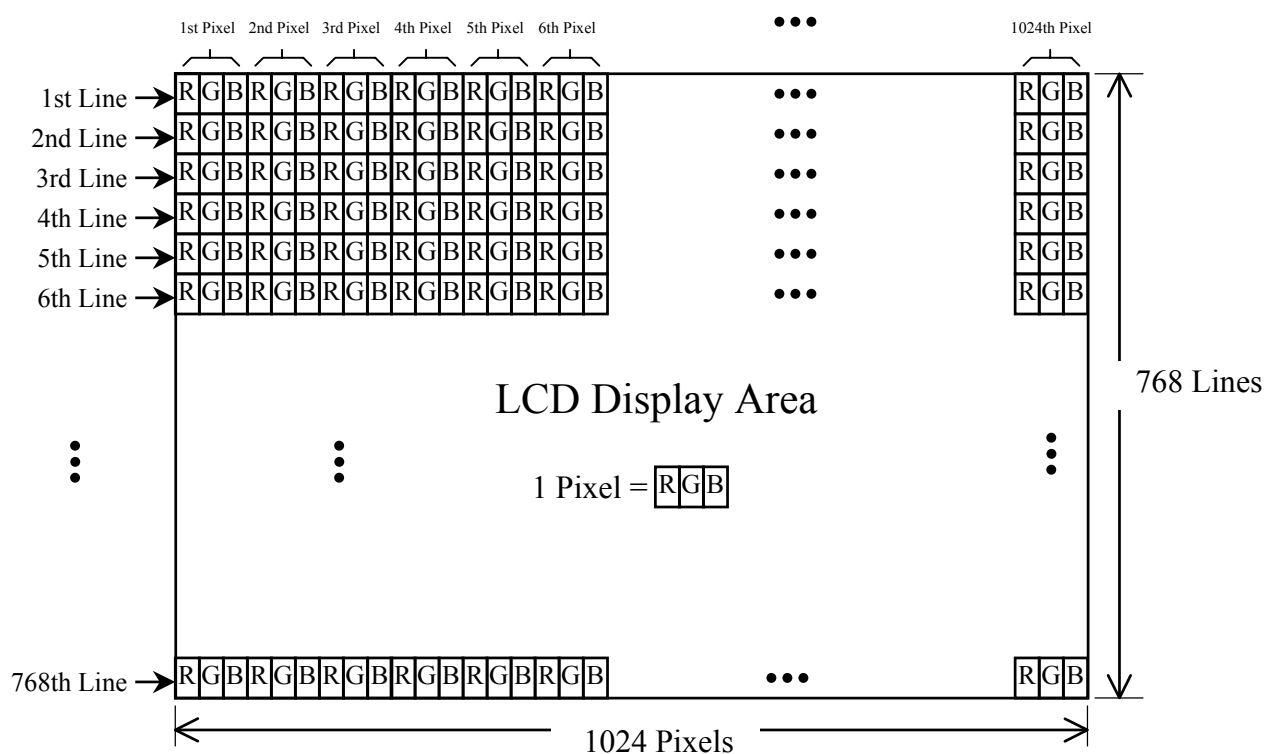

Document Title	HSD150SX84-B Product Information	Page No.	14 / 32
Document No.		Revision	

4.3 Relationship between Displayed Color and Input Data

	Display	MSB R5 R4 R3 R2 R1 R0	LSB	MSB G5 G4 G3 G2 G1 G0	LSB	MSB B5 B4 B3 B2 B1 B0	LSB	Gray scale level
Basic color	Black	L L L L L L	L	L L L L L L	L	L L L L L L	L	-
	Blue	L L L L L L	L	L L L L L L	L	H H H H H H	H	-
	Green	L L L L L L	L	H H H H H H	H	L L L L L L	L	-
	Light Blue	L L L L L L	L	H H H H H H	H	H H H H H H	H	-
	Red	H H H H H H	H	L L L L L L	L	L L L L L L	L	-
	Purple	H H H H H H	H	L L L L L L	L	H H H H H H	H	-
	Yellow	H H H H H H	H	H H H H H H	H	L L L L L L	L	-
	White	H H H H H H	H	H H H H H H	H	H H H H H H	H	-
Gray scale of Red	Black	L L L L L L	L	L L L L L L	L	L L L L L L	L	L0
	Dark ↑ ↓ Light	L L L L L H	L	L L L L L L	L	L L L L L L	L	L1
		L L L L H L	L	L L L L L L	L	L L L L L L	L	L2
		: : :		: : :		: : :		L3...L60
		H H H H L H	L	L L L L L L	L	L L L L L L	L	L61
		H H H H H L	L	L L L L L L	L	L L L L L L	L	L62
	Red	H H H H H H	H	L L L L L L	L	L L L L L L	L	Red L63
Gray scale of Green	Black	L L L L L L	L	L L L L L L	L	L L L L L L	L	L0
	Dark ↑ ↓ Light	L L L L L L	L	L L L L L H	L	L L L L L L	L	L1
		L L L L L L	L	L L L L H L	L	L L L L L L	L	L2
		: : :		: : :		: : :		L3...L60
		L L L L L L	L	H H H H L H	L	L L L L L L	L	L61
		L L L L L L	L	H H H H H L	L	L L L L L L	L	L62
	Green	L L L L L L	L	H H H H H H	H	L L L L L L	L	Green L63
Gray scale of Blue	Black	L L L L L L	L	L L L L L L	L	L L L L L L	L	L0
	Dark ↑ ↓ Light	L L L L L L	L	L L L L L L	L	L L L L L H	L	L1
		L L L L L L	L	L L L L L L	L	L L L L H L	L	L2
		: : :		: : :		: : :		L3...L60
		L L L L L L	L	L L L L L L	L	H H H H L H	L	L61
		L L L L L L	L	L L L L L L	L	H H H H H L	L	L62
	Blue	L L L L L L	L	L L L L L L	L	H H H H H H	H	Blue L63
Gray scale of White and Black	Black	L L L L L L	L	L L L L L L	L	L L L L L L	L	L0
	Dark ↑ ↓ Light	L L L L L H	L	L L L L L H	L	L L L L L H	L	L1
		L L L L H L	L	L L L L H L	L	L L L L H L	L	L2
		: : :		: : :		: : :		L3...L60
		H H H H L H	L	H H H H L H	L	H H H H L H	L	L61
		H H H H H L	L	H H H H H L	L	H H H H H L	L	L62
	White	H H H H H H	H	H H H H H H	H	H H H H H H	H	White L63

Document Title	HSD150SX84-B Product Information	Page No.	15 / 32
Document No.		Revision	


5.0 I/O CONNECTION PIN ASSIGNMENT

5.1 Interface FPC Connector (40-pins x 2) (Hirose: FH12-40S-0.5SH)

I/F FRC Connector (J1)			I/F FRC Connector (J2)		
Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	NC	No Connecting	1	VDD	Digital Power Input (DC +3.3V)
2	NC	No Connecting	2	VDD	Digital Power Input (DC +3.3V)
3	GND	Ground	3	GND	Ground
4	GND	Ground	4	GND	Ground
5	EB5	Even-dot Blue Data bit 5 (MSB)	5	OB5	Odd-dot Blue Data bit 5 (MSB)
6	EB4	Even-dot Blue Data bit 4	6	OB4	Odd-dot Blue Data bit 4
7	EB3	Even-dot Blue Data bit 3	7	OB3	Odd-dot Blue Data bit 3
8	EB2	Even-dot Blue Data bit 2	8	OB2	Odd-dot Blue Data bit 2
9	EB1	Even-dot Blue Data bit 1	9	OB1	Odd-dot Blue Data bit 1
10	EB0	Even-dot Blue Data bit 0 (LSB)	10	OB0	Odd-dot Blue Data bit 0 (LSB)
11	GND	Ground	11	GND	Ground
12	EG5	Even-dot Green Data bit 5 (MSB)	12	OG5	Odd-dot Green Data bit 5 (MSB)
13	EG4	Even-dot Green Data bit 4	13	OG4	Odd-dot Green Data bit 4
14	EG3	Even-dot Green Data bit 3	14	OG3	Odd-dot Green Data bit 3
15	EG2	Even-dot Green Data bit 2	15	OG2	Odd-dot Green Data bit 2
16	EG1	Even-dot Green Data bit 1	16	OG1	Odd-dot Green Data bit 1
17	EG0	Even-dot Green Data bit 0 (LSB)	17	OG0	Odd-dot Green Data bit 0 (LSB)
18	GND	Ground	18	GND	Ground
19	ER5	Even-dot Red Data bit 5 (MSB)	19	OR5	Odd-dot Red Data bit 5 (MSB)
20	ER4	Even-dot Red Data bit 4	20	OR4	Odd-dot Red Data bit 4
21	ER3	Even-dot Red Data bit 3	21	OR3	Odd-dot Red Data bit 3
22	ER2	Even-dot Red Data bit 2	22	OR2	Odd-dot Red Data bit 2
23	ER1	Even-dot Red Data bit 1	23	OR1	Odd-dot Red Data bit 1
24	ER0	Even-dot Red Data bit 0 (LSB)	24	OR0	Odd-dot Red Data bit 0 (LSB)
25	GND	Ground	25	GND	Ground
26	CPH1	Pixel Clock Input	26	CPH2	Pixel Clock Input
27	GND	Ground	27	GND	Ground
28	GND	Ground	28	GND	Ground
29	STH	Horizontal Start Pulse	29	NC	No Connecting
30	LOAD	Source Driver Latch Pulse	30	NC	No Connecting
31	POL	Source Driver Output Polarity control	31	NC	No Connecting
32	REV	Data Reverse Control Signal	32	NC	No Connecting
33	GND	Ground	33	NC	No Connecting
34	GND	Ground	34	NC	No Connecting
35	STV1	Vertical Start Pulse 1	35	NC	No Connecting
36	STV2	Vertical Start Pulse 2	36	NC	No Connecting
37	CPV	Vertical Clock Input	37	NC	No Connecting
38	OE	Gate Driver Output Enable Signal	38	NC	No Connecting
39	GND	Ground	39	GND	Ground
40	GND	Ground	40	GND	Ground

Document Title	HSD150SX84-B Product Information	Page No.	16 / 32
Document No.		Revision	

5.2 Back Light Unit (CCFL) Connectors:

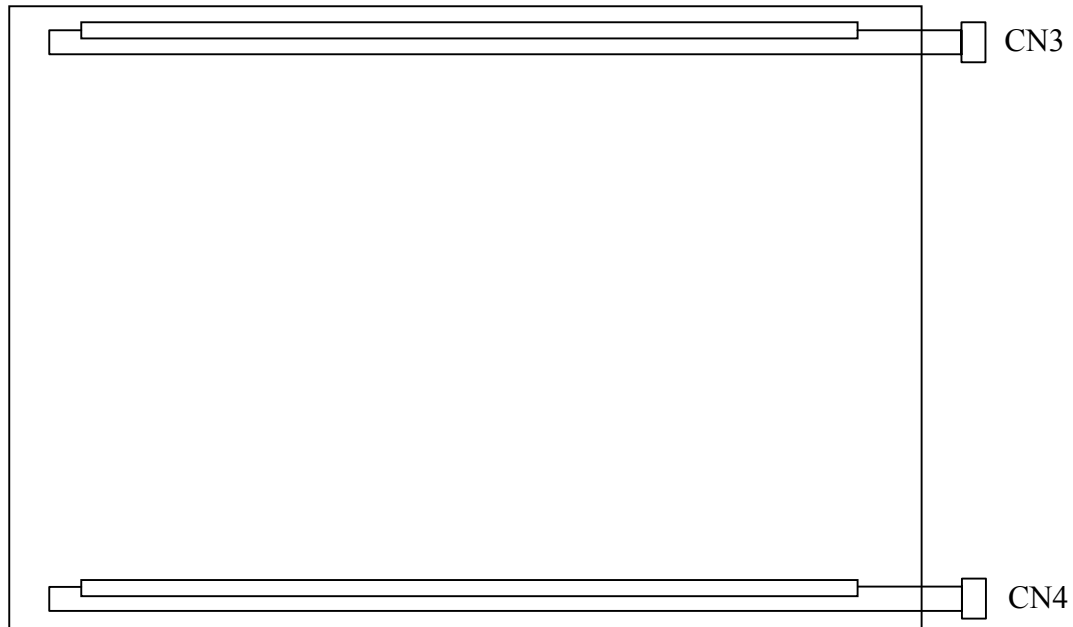

CN3, 4: CCFL Power Source (BHR-03VS-1/Japan Solderless Terminal MFG Co., LTD)

Mating connector: SM02 (8.0)B-BHS-1/ Japan Solderless Terminal MFG Co., LTD

Terminal No.	Symbol	Function
1	VL	CCFL power supply (high voltage)
2	NC ¹⁾	No connection
3	GL	CCFL power supply (low voltage)

Note 1) Please connects NC pin to nothing. Don't connect it to ground nor to other signal Input. (NC pin should be open.)

Document Title	HSD150SX84-B Product Information	Page No.	17 / 32
Document No.		Revision	

6.0 ELECTRICAL CHARACTERISTICS

6.1 Electrical System of LCD Module:

Item	Symbol	Condition	Value			Unit
			Min.	Typ.	Max.	
Input Voltage	V_{DD}		+3.0	+3.3	+3.6	V(DC)
Input Rush Current	I_{rush}	$V_{DD} = +3.3V$ Each $I_{out} = \max.$	-	-	1.5	A
Input Signal voltage	V_{IH}	High Level	2.4	3.3	$V_{DD}+0.2$	V
	V_{IL}	Low Level	0	-	0.9	V


6.2 Back-Light Unit:

The backlight system is an edge-lighting type with 2-CCFL (Cold Cathode Fluorescent Lamp). The characteristics of four lamps are shown in the following tables.

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Lamp current	I_L	3.0	6.0	7.0	mA(rms)	(1)
Lamp voltage	V_L	640	750	860	V(rms)	$I_L=6.0$ mA
Frequency	f_L	50	55	80	KHz	(2)
Lamp operating life time	Hr	30,000	-	-	Hour	(3)
Startup voltage	V_s	1300	-	-	V(rms)	at 25°C
		1350				at 0°C

Document Title	HSD150SX84-B Product Information	Page No.	18 / 32
Document No.		Revision	

Note: (1) Lamp current is measured with current meter for high frequency as shown below. Specified values are for a lamp.

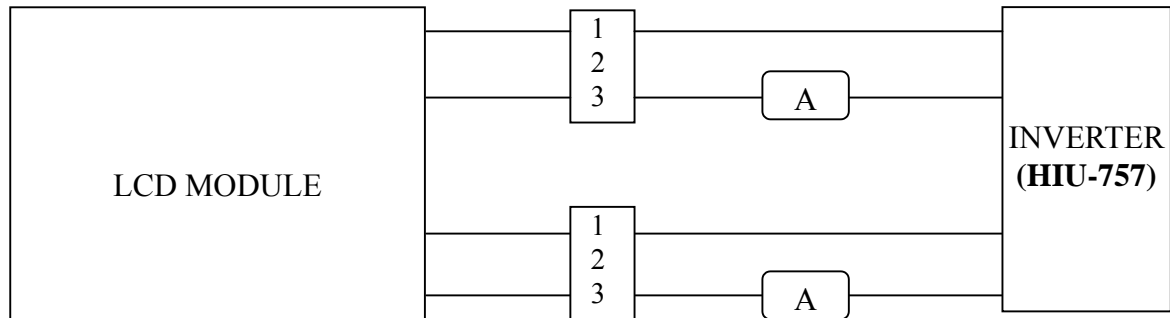

- (2) Lamp frequency may produce interference with horizontal synchronous frequency and this may cause line flow on the display. Therefore lamp frequency shall be detached from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.
- (3) Life time (Hr) can be defined as the time in which it continues to operate under the condition: Temp. = $25 \pm 3^\circ\text{C}$, $I_L = 6.0\text{mA(rms.)}$ and $f_L = 50\text{ KHz}$ until one of the following event occurs:
1. When the brightness becomes 50%.
 2. When the startup voltage (V_s) at 0°C becomes higher than the maximal value of V_s specified above.

Document Title	HSD150SX84-B Product Information	Page No.	19 / 32
Document No.		Revision	

6.3 AC Electrical Characteristics:

6.3.1 AC Timing: (VDD=3.0V~3.6V, T_{OPR}=25 °C)⁵⁾

Item		Symbol	Min.	Typ.	Max.	Unit	Signals	Note
Reference Signal (Pixel Clock)	Periodic	F1	50	65	80	MHz		
		T1=CLK	12.5	15.384	20	n-Sec		
		T2=T1*2	25	30.769	40	n-Sec		
Reference Signal (DENB)	Line Periodic	T3=Line	526	672	900	T2		1), 2), 4)
	Line Active	T4	512	512	512	T2		
	Line Blank	T5	14	160	388	T2		
	Frame Periodic	T6	773	806	950	Lines		
	Frame Active	T7	768	768	768	Lines		
	Frame Blank	T8	5	---	---	Lines		
Vertical Periodic	Periodic	T6	773	806	950	Lines	STV1 STV2	2)
	Pulse Width	T9	1	1	---	Lines		
		T10	2	2	---			
	Rising Time	T11	---	40	60	n-Sec		
	Falling Time	T12	---	40	60	n-Sec		
	Set-up Time	T13	700	800	---	n-Sec		
Horizontal Periodic	Hold Time	T14	700	800	---	n-Sec	OE CPV LOAD STH	
	Period	T15	---	1	---	Lines		
	Pulse Width	T16A	1	64 30.769	100 40	u-Sec		
		T16B	1			u-Sec		
		T16C	2			T2		
		T16D	25			n-Sec		
	Rising Time	T17A	2	40	60	n-Sec		
		T17B		40	60			
		T17C		4				
		T17D		4				
	Falling Time	T18A	2	40	60	n-Sec		
		T18B		40	60			
T18C		4						
T18D		4						
Set-up Time	T19A	7	10	---	n-Sec	LOAD STH		
	T19B	7	10					
Hold Time	T20A	7	10	---	n-Sec			
	T20B	7	10					

Document Title	HSD150SX84-B Product Information	Page No.	20 / 32
Document No.		Revision	

Item	Symbol	Min.	Typ.	Max.	Unit	Signals	Note
Horizontal Periodic	Period	T21	---	2	---	Lines	POL
	Pulse Width	T22	---	1	---	Lines	
	Rising Time	T23	7	10	---	n-Sec	
	Falling Time	T24	7	10	---	n-Sec	
	Set-up Time	T25	-5	---	---	n-Sec	
	Hold Time	T26	6	---	---	n-Sec	
Clock	Period	T2	25.00	30.769	40	n-Sec	CPH1 CPH2 ³⁾
	Rising Time	T27	2	4	---	n-Sec	
	Falling Time	T28	2	4	---	n-Sec	
Image Data And Data Reverse Control Pin	Setup time	T29	2	---	---	n-Sec	ER(5:0) EG(5:0) EB(5:0) OR(5:0) OG(5:0) OB(5:0) REV
	Hold time	T30	2	---	---	n-Sec	
Relative Signals	LOAD rising-STH rising	T31	2	---	---	n-Sec	
	CPV rising-LOAD rising	T32	2	4	---	u-Sec	

Note 1) Refer to VESA standard.

Note 2) In case of using the long frame period, the deterioration of display quality, noise etc. may be occurred.

Note 3) Do not fix CPH1 and CPH2 to “H” or “L” level while the V_{DD} (+3.3V) is supplied. If CPH1 and CPH2 is fixed to “H” level or “L” level for certain period while the V_{DD} (+3.3V) is supplied, the panel may be damaged.


Note 4) Do not change t3 and t6 values in the operation. When t1 or t4 is changed, the panel is displayed as black.

Note 5) Please adjust LCD operating signal timing and FL driving frequency, to optimize the display quality. There is a possibility that flicker is observed by the interference of LCD operating signal timing and FL driving condition (especially driving frequency).

Document Title	HSD150SX84-B Product Information	Page No.	21 / 32
Document No.		Revision	


6.3.2 AC Timing Charts:

(1). Reference Signal (pixel clock):

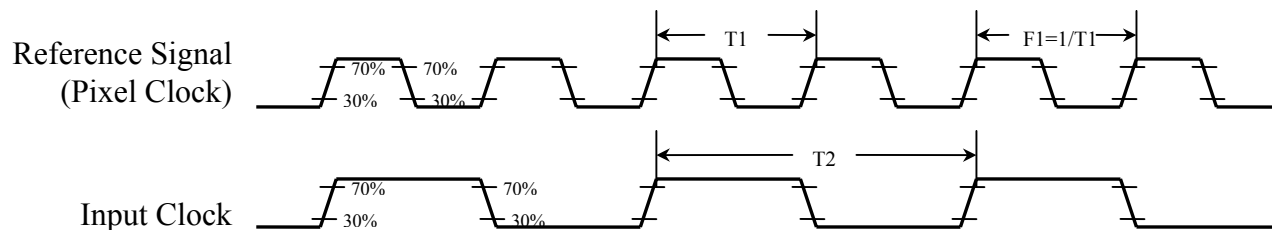


Document Title	HSD150SX84-B Product Information	Page No.	22 / 32
Document No.		Revision	

(2). Vertical Periodic (STV1, STV2, OE, CPV):

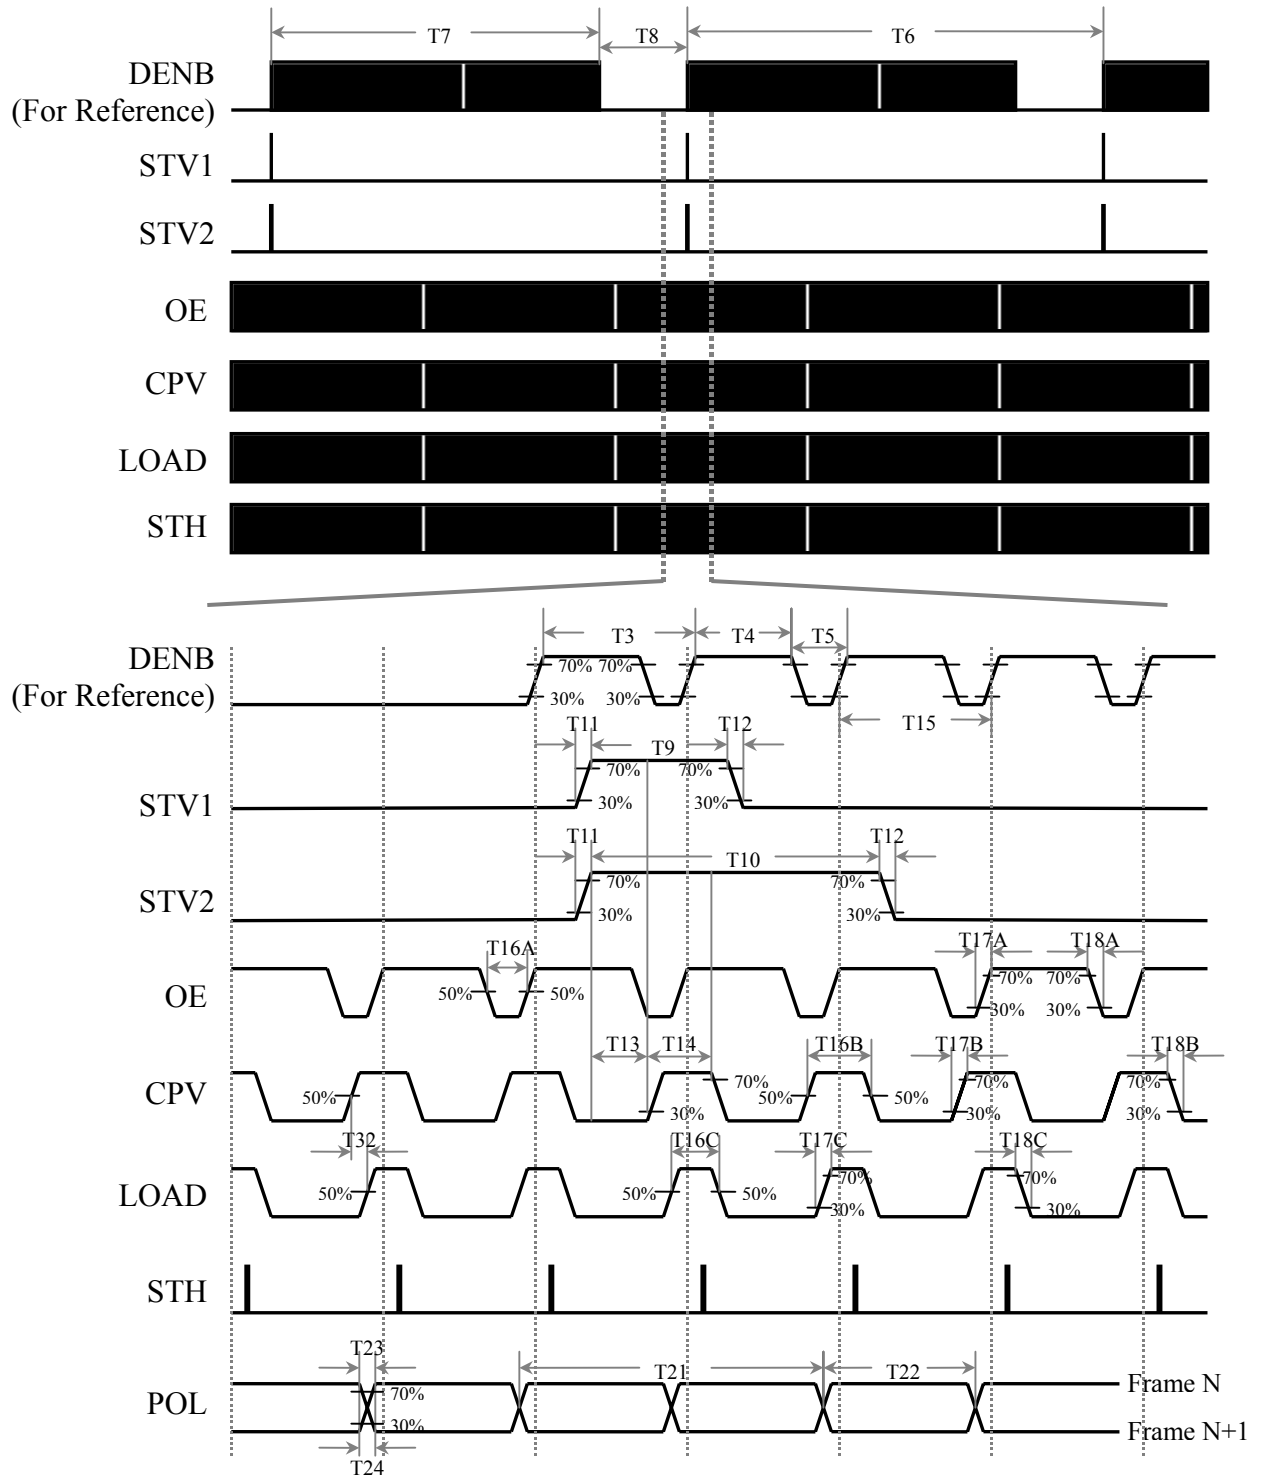


Document Title	HSD150SX84-B Product Information	Page No.	23 / 32
Document No.		Revision	

(3). Horizontal Periodic 1 (STH, CPH, DATA):

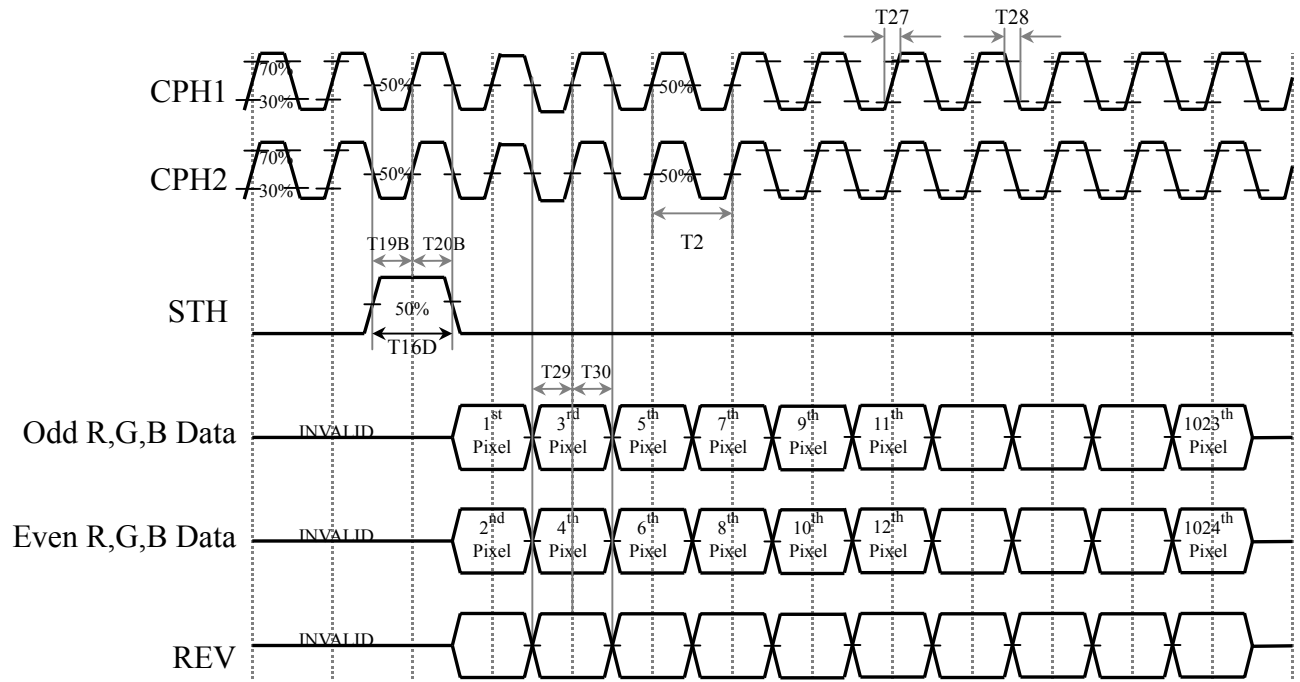


(4). Horizontal Periodic 2 (CPH, LOAD, STH, POL):

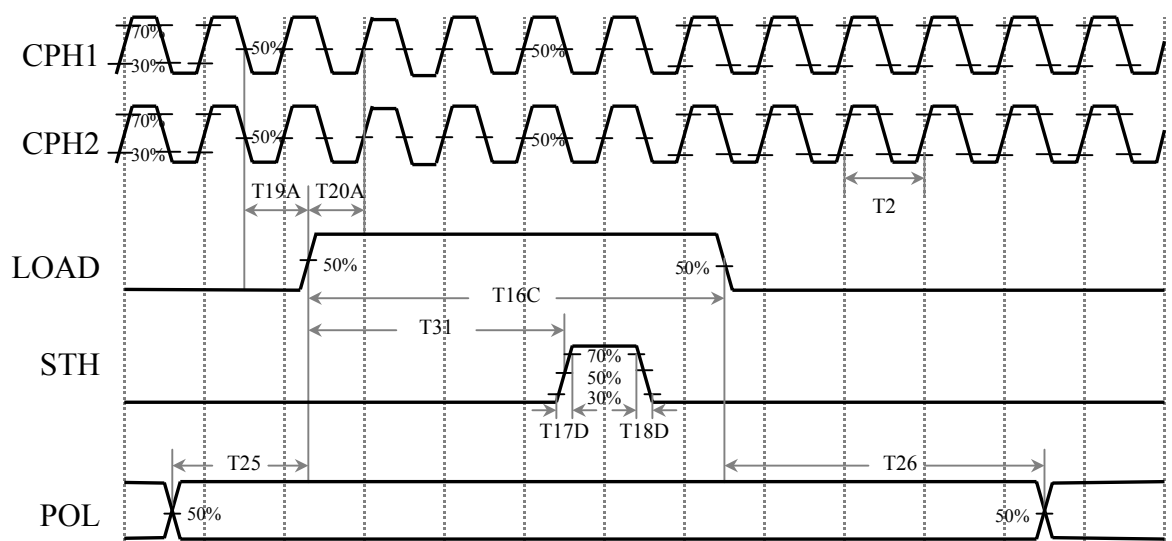

Document Title	HSD150SX84-B Product Information	Page No.	24 / 32
Document No.		Revision	

6.4 Power On / Off Sequence :

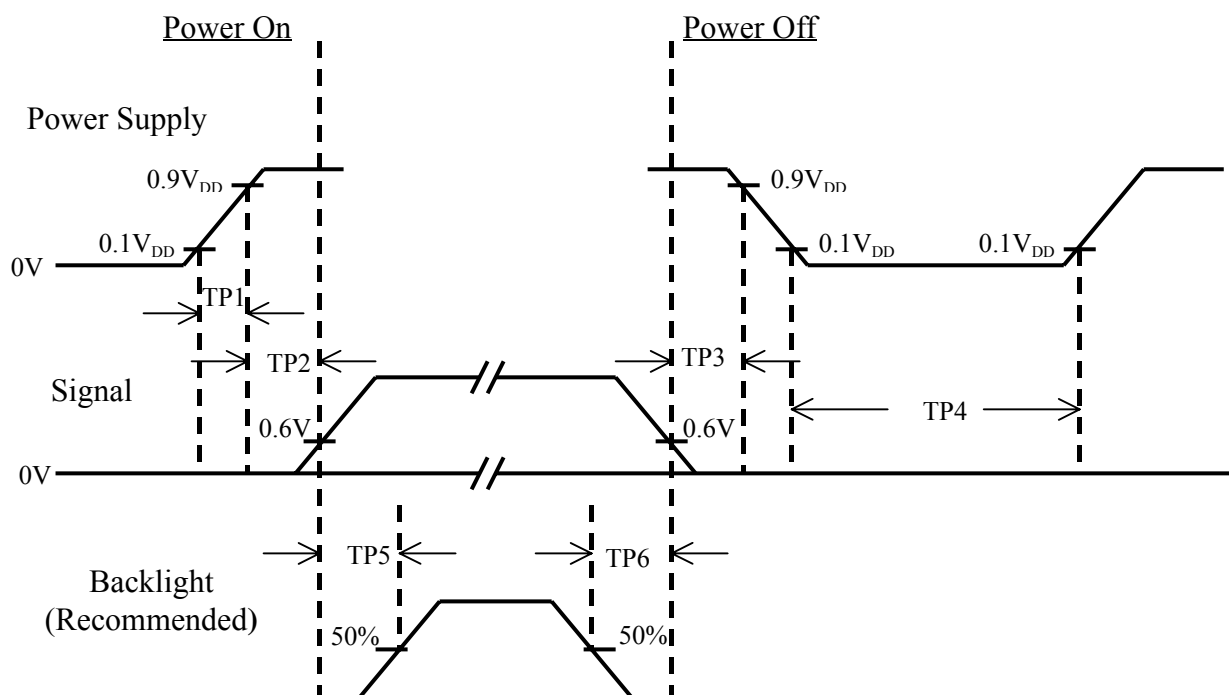

Item	Min.	Typ.	Max.	Unit	Remark
TP1	0	-	10	msec	
TP2	50	-	-	msec	
TP3	50	-	-	msec	
TP4	1	-	-	sec	
TP5	200	-	-	msec	
TP6	200	-	-	msec	

Note : (1) The supply voltage of the external system for the module input should be the same as the definition of V_{DD}.

(2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.

(3) In case of V_{DD} = off level, please keep the level of input signal on the low or keep a high impedance.

(4) T4 should be measured after the module has been fully discharged between power off and on period.


(5) Interface signal shall not be kept at high impedance when the power is on.

Document Title	HSD150SX84-B Product Information	Page No.	25 / 32
Document No.		Revision	

7.0 OUTLINE DIMENSION

7.1.1 Front View:


Date: 2001120

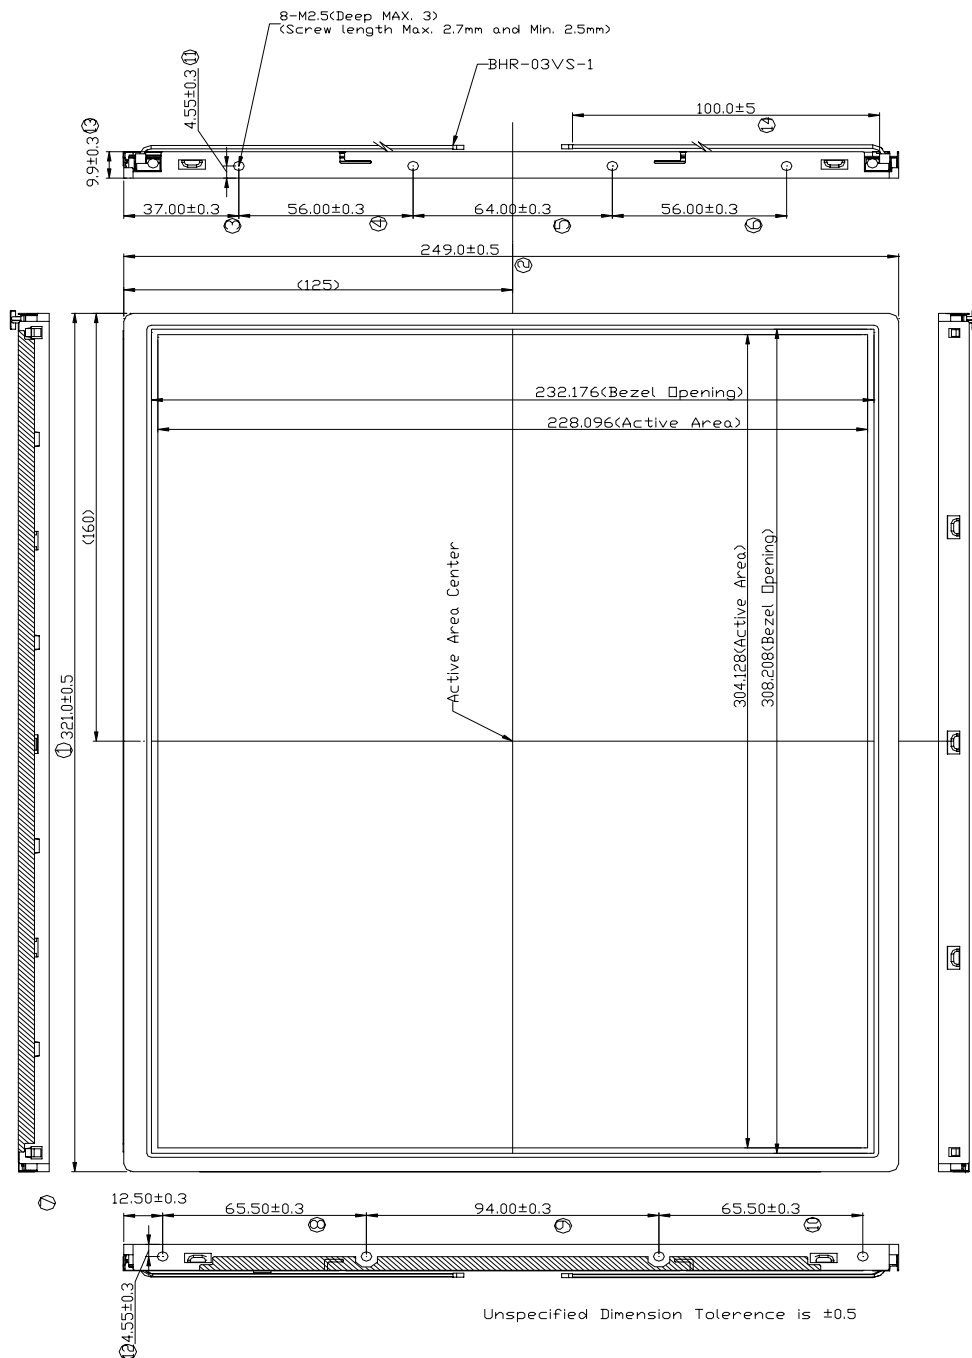

Document Title	HSD150SX84-B Product Information	Page No.	26 / 32
Document No.		Revision	

7.1.2 Back View:

Date: 20011120

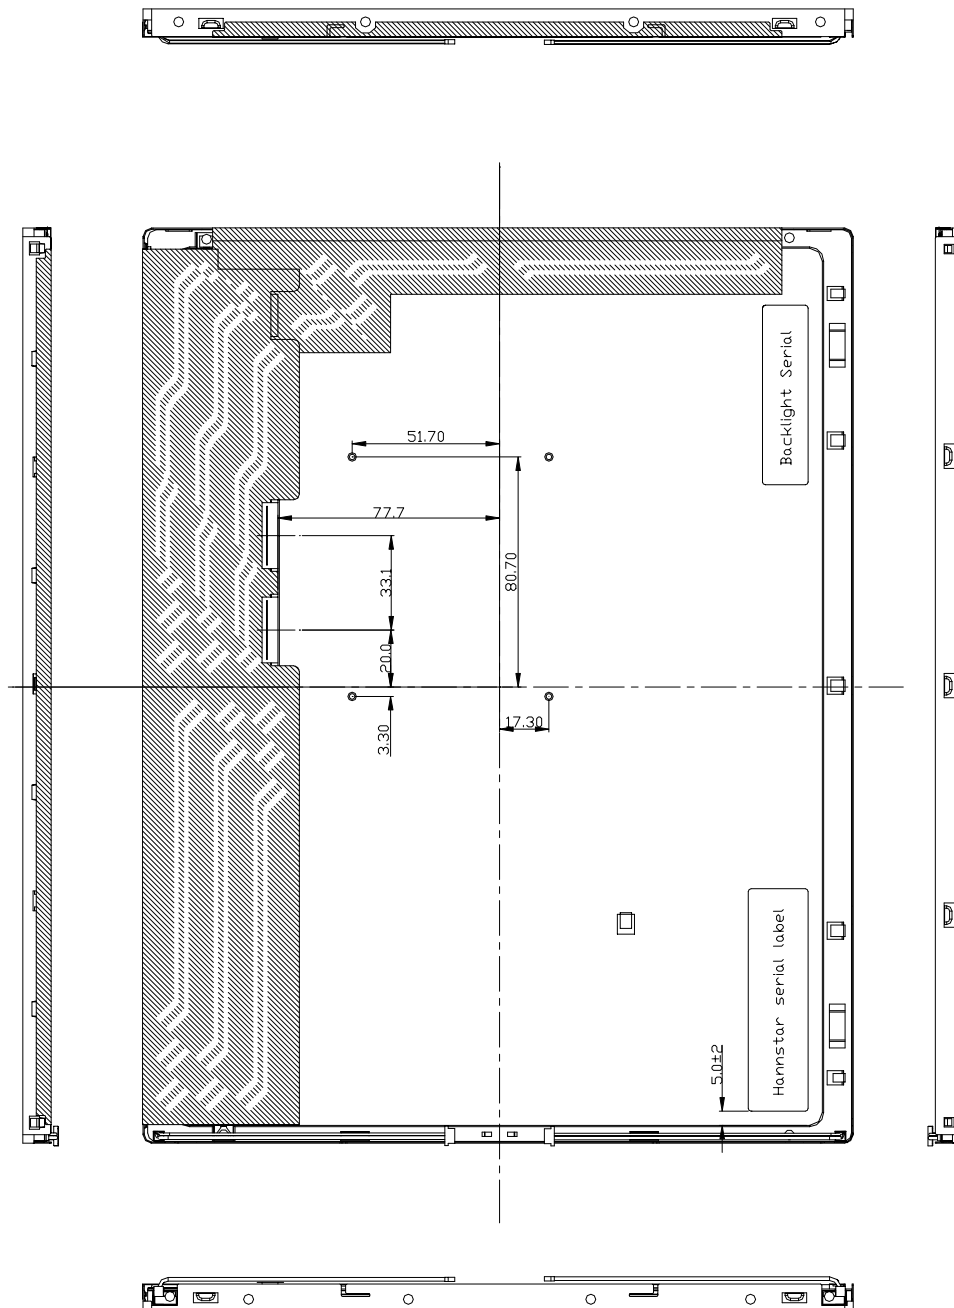


Document Title	HSD150SX84-B Product Information	Page No.	27 / 32
Document No.		Revision	

7.2 Tolerance of distance between active area and bezel opening

a - b 1.0 mm

c - d 1.0 mm

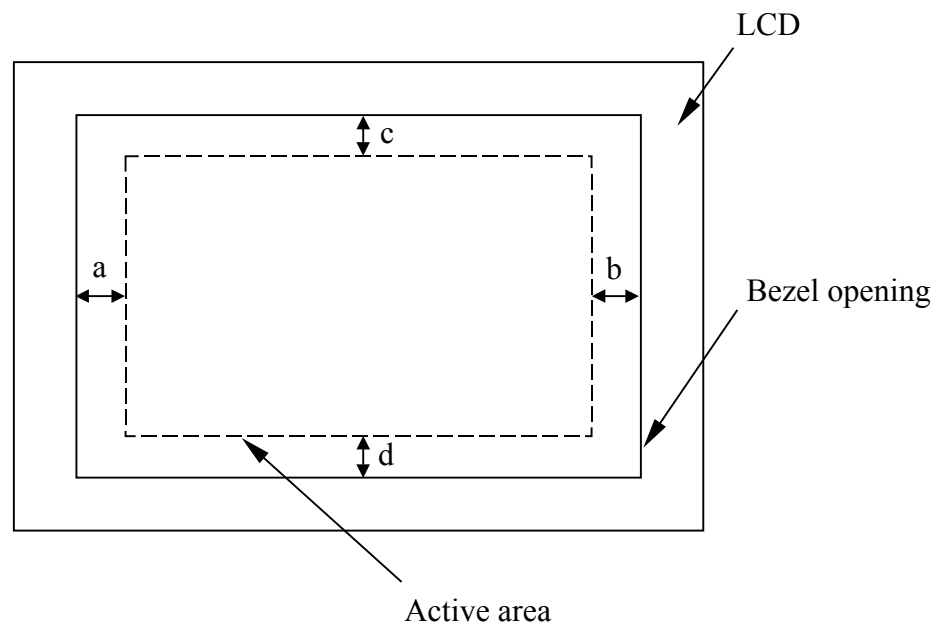

Document Title	HSD150SX84-B Product Information	Page No.	28 / 32
Document No.		Revision	

8. LOT MARK

8.1 Lot Mark

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----

code 1,2,3,4,5,6: HannStar internal flow control code.

code 7: production location.

code 8: production year.

code 9: production month.

code 10,11,12,13,14,15: serial number.

Note (1) Production Year

Year	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008
Mark	9	0	1	2	3	4	5	6	7	8

Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C


8.2 Location of Lot Mark

(1) The label is attached to the backside of the LCD module.

(2) This is subject to change without prior notice.



Lot mark

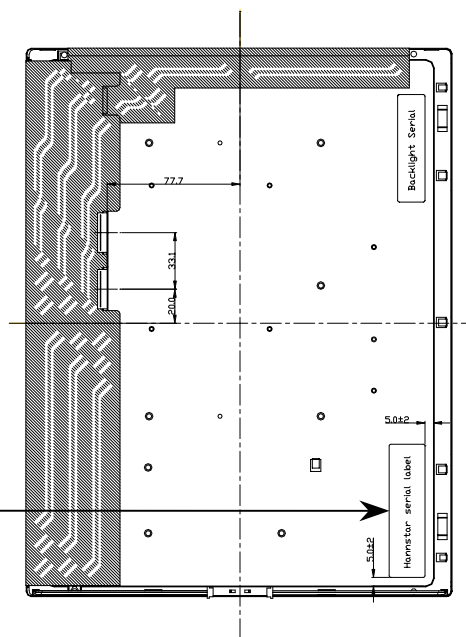


Document Title	HSD150SX84-B Product Information	Page No.	29 / 32
Document No.		Revision	

9.0 PACKAGE SPECIFICATION

9.1 packing form


- (1) package quantity in one carton: 10 pieces.
- (2) carton size: 453± 3 mm× 360± 3 mm× 403± 3 mm.
- (3) for domestic transportation only.

9.2 packing assembly drawings

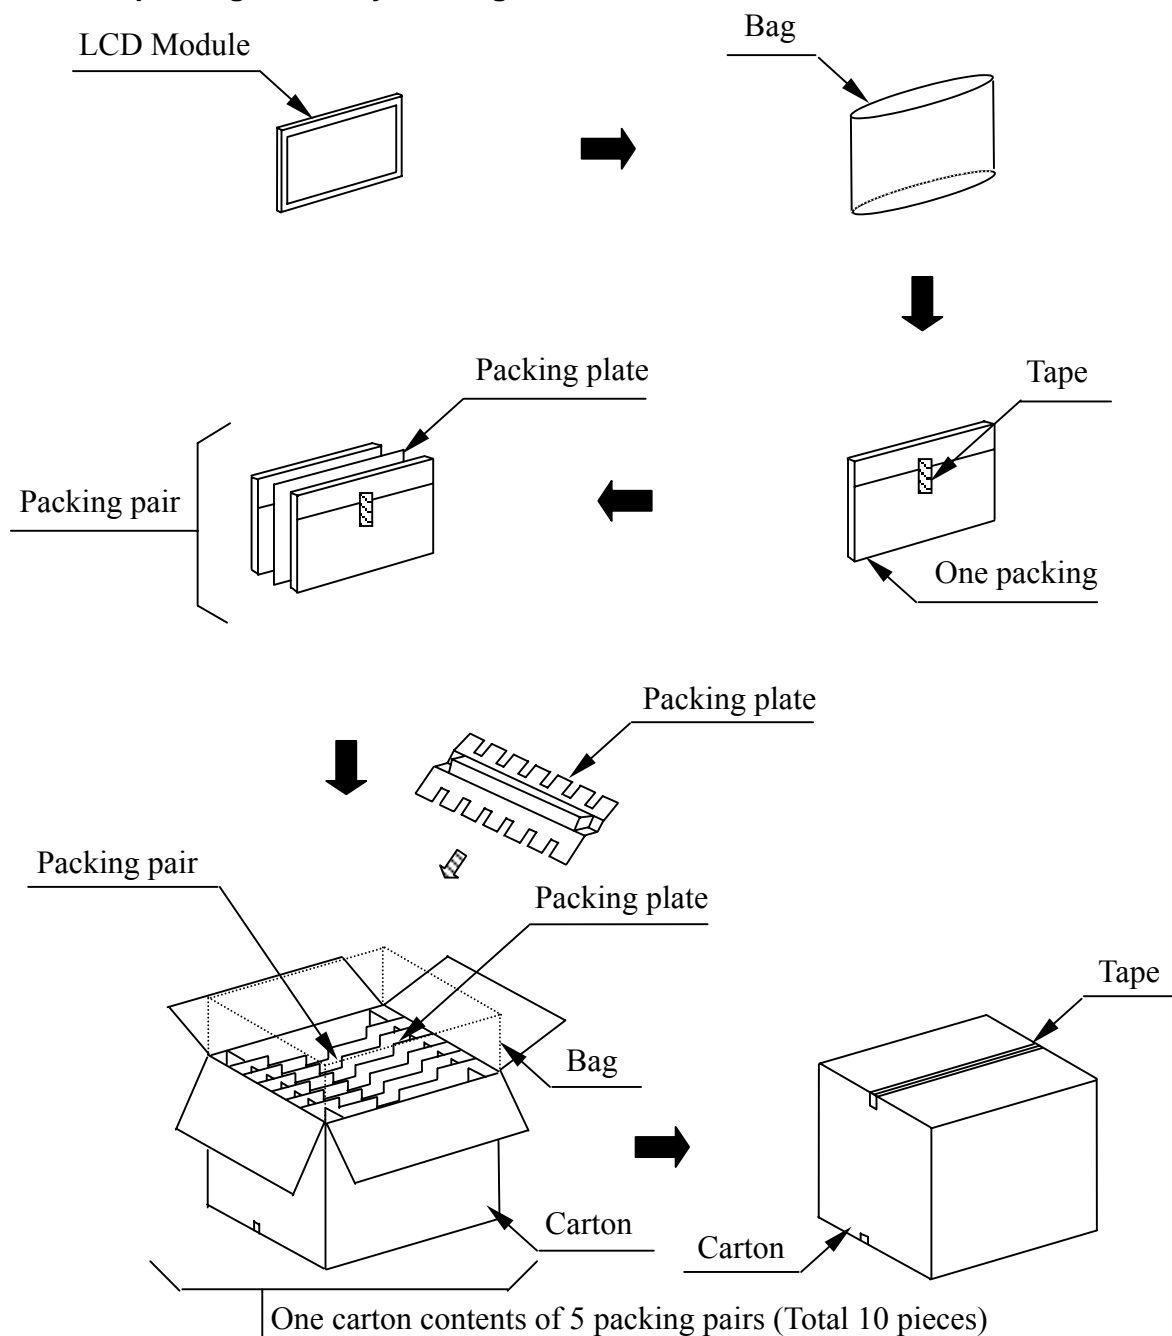

Document Title	HSD150SX84-B Product Information	Page No.	30 / 32
Document No.		Revision	

9.3 Pallet transportation specification

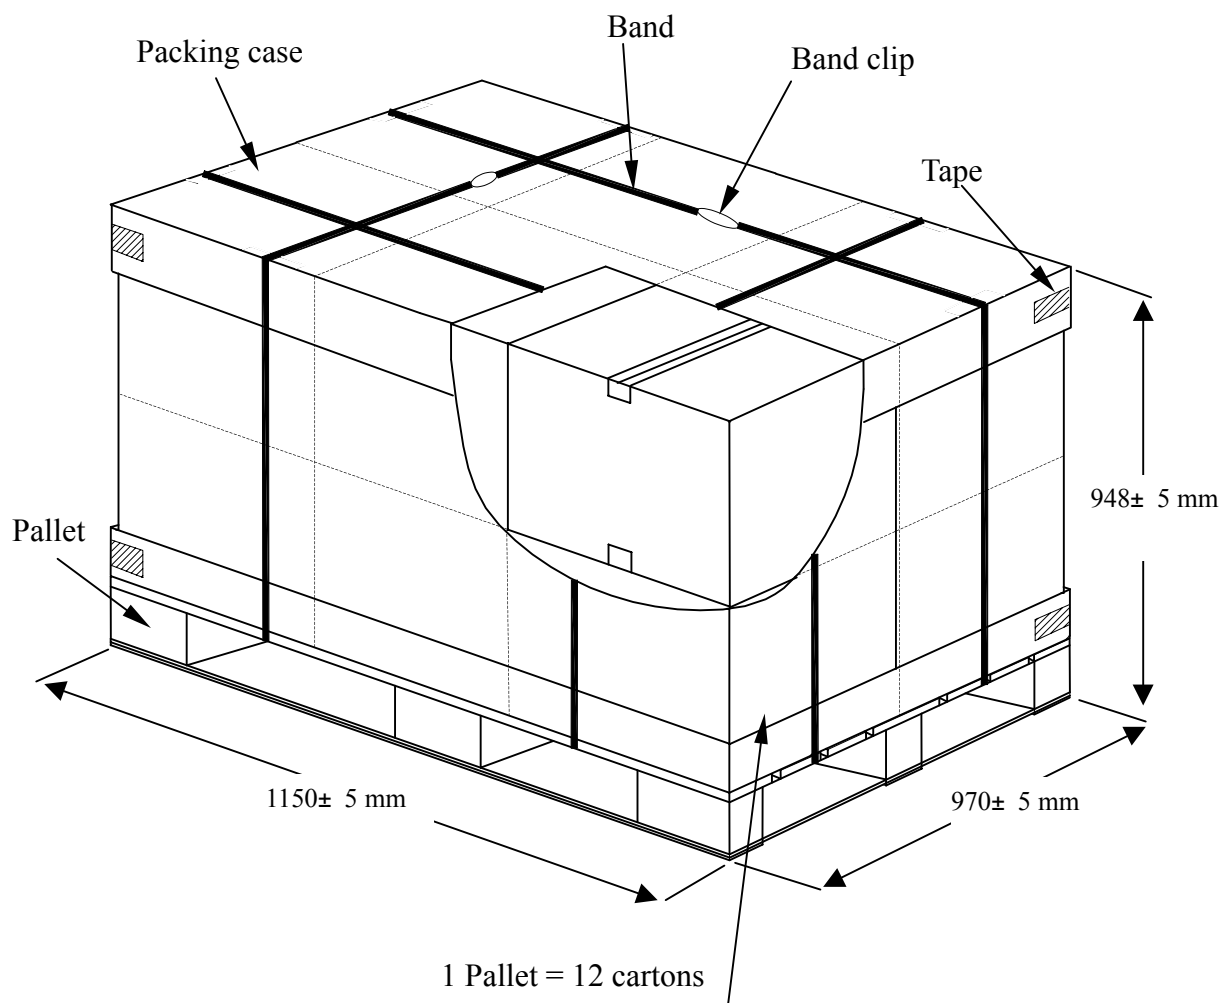

Document Title	HSD150SX84-B Product Information	Page No.	31 / 32
Document No.		Revision	

10.0 GENERAL PRECAUTION

10.0 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

10.1 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. HannStar does not warrant the module, if customers disassemble or modify the module.

10.2 Breakage of LCD Panel

- 1.1.1 If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.
- 1.1.2 If liquid crystal contacts mouth or eyes, rinse out with water immediately.
- 1.1.3 If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.
- 1.1.4 Handle carefully with chips of glass that may cause injury, when the glass is broken.

10.3 Electric Shock

- 1..1 Disconnect power supply before handling LCD module.
- 1..2 Do not pull or fold the CCFL cable.
- 1..3 Do not touch the parts inside LCD modules and the fluorescent lamp's connector or cables in order to prevent electric shock.

10.4 Absolute Maximum Ratings and Power Protection Circuit

- 1..1 Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.
- 1..2 Please do not leave LCD module in the environment of high humidity and high temperature for a long time.
- 1..3 It's recommended employing protection circuit for power supply.

10.5 Operation

- 1..4 Do not touch, push or rub the polarizer with anything harder than HB pencil lead.
- 1..5 Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.
- 1..6 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.
- 1..7 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.
- 1..8 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzine or other adequate solvent.



Document Title	HSD150SX84-B Product Information	Page No.	32 / 32
Document No.		Revision	

10.6 Mechanism

Please mount LCD module by using mounting holes arranged in four corners tightly.

10.7 Static Electricity

10.7.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.

10.7.2 Because LCD module uses CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge.

10.7.3 Persons who handle the module should be grounded through adequate methods.

10.8 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

10.9 Disposal

When disposing LCD module, obey the local environmental regulations.