




Product Specification

AU OPTRONICS CORPORATION

(V) Preliminary Specifications

() Final Specifications

| | |
|--|---|
| Module | 17.3"(17.26") FHD 16:9 Color TFT-LCD with LED Backlight design |
| Model Name | B173HAN01.3 (H/W:2A) |
| Note () | <i>LED Backlight with driving circuit design</i> |

| | |
|--|-------------------|
| Customer | Date |
| <u>XXXXXX</u> | <u>MM/DD/YYYY</u> |
| Checked & Approved by | Date |
| <u>XXXXXX</u> | <u>MM/DD/YYYY</u> |
| Note: This Specification is subject to change without notice. | |

| | |
|--------------------------|-------------------|
| Approved by | Date |
| | <u>03/24/2017</u> |
| Prepared by | Date |
| | <u>03/24/2017</u> |
| AU Optronics corporation | |



Contents

| | |
|---|-----------|
| 1. Handling Precautions | 3 |
| 2. General Description | 4 |
| 2.1 General Specification | 4 |
| 2.2 Optical Characteristics | 5 |
| 3. Functional Block Diagram | 10 |
| 4. Absolute Maximum Ratings..... | 11 |
| 4.1 Absolute Ratings of TFT LCD Module | 11 |
| 4.2 Absolute Ratings of Environment | 11 |
| 5. Electrical Characteristics..... | 12 |
| 5.1 TFT LCD Module..... | 12 |
| 5.2 Backlight Unit | 15 |
| 6. Signal Interface Characteristic..... | 16 |
| 6.1 Pixel Format Image | 16 |
| 6.2 Integration Interface Requirement..... | 17 |
| 6.3 Interface Timing | 20 |
| 6.4 Power ON/OFF Sequence | 20 |
| 7. Panel Reliability Test | 24 |
| 7.1 Vibration Test | 24 |
| 7.2 Shock Test | 24 |
| 7.3 Reliability Test..... | 24 |
| 8. Mechanical Characteristics..... | 25 |
| 8.1 LCM Outline Dimension..... | 25 |
| 8.2 Screw Hole Depth and Center Position..... | 27 |
| 9. Shipping and Package | 28 |
| 9.1 Shipping Label Format | 28 |
| 9.2 Carton Package..... | 29 |
| 9.3 Shipping Package of Palletizing Sequence..... | 29 |
| 10. Appendix:..... | 30 |
| 10.1 EDID Description..... | 30 |
| 10.2 Notes..... | 33 |



Product Specification

AU OPTRONICS CORPORATION

Record of Revision

| Version and Date | Page | Old description | New Description | Remark |
|------------------|------|----------------------------|-----------------|--------|
| 0.1 2017/3/24 | All | First Edition for Customer | | |
| 0.1 2017/5/8 | 30 | No EDID | Add EDID table | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

1. Handling Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open nor modify the Module Assembly.
- 8) Do not press the reflector sheet at the back of the module to any directions.
- 9) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) After installation of the TFT Module into an enclosure (Notebook PC Bezel, for example), do not twist nor bend the TFT Module even momentarily. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 12) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 13) Disconnecting power supply before handling LCD modules, it can prevent electric shock, DO NOT TOUCH the electrode parts, cables, connectors and LED circuit part of TFT module that a LED light bar build in as a light source of back light unit. It can prevent electrostatic breakdown.

2. General Description

B173HAN01.3 is a Color Active Matrix Liquid Crystal Display composed of a TFT LCD panel, a driver circuit, and LED backlight system. The screen format is intended to support the 16:9 FHD, 1920(H) x 1080(V) screen and 262k colors (RGB 6-bits data driver) with LED backlight driving circuit. All input signals are eDP(Embedded DisplayPort) interface compatible.

B173HAN01.3 is designed for a display unit of notebook style personal computer and industrial machine.

2.1 General Specification

The following items are characteristics summary on the table at 25 °C condition:

| Items | Unit | Specifications | | | |
|--|----------------------|--|-------|-------|-------|
| Screen Diagonal | [mm] | 17.3"(17.26) | | | |
| Active Area | [mm] | 381.888 x 214.812 | | | |
| Pixels H x V | | 1920 x 3 (RGB) x 1080 | | | |
| Pixel Pitch | [mm] | 0.1989 x 0.1989 | | | |
| Pixel Format | | R.G.B. Vertical Stripe | | | |
| Display Mode | | Normally Black(AHVA) | | | |
| White Luminance (ILED=25mA) (Note: ILED is LED current) | [cd/m ²] | 300 typ. (5 points average) 255 min. (5 points average) | | | |
| Luminance Uniformity | | 1.25 max. (5 points) | | | |
| Luminance Uniformity | | 1.53 max. (13 points) | | | |
| Contrast Ratio | | 700 typ | | | |
| Response Time | [ms] | 25 typ | | | |
| Nominal Input Voltage VDD | [Volt] | +3.3 typ. | | | |
| Power Consumption | [Watt] | 6.9 W Max (Max : Include Logic@ mosaic and Blu power) | | | |
| Weight | [Grams] | 550g max | | | |
| Physical Size | [mm] | | Min. | Typ. | Max. |
| | | Length | 397.6 | 398.1 | 398.6 |
| | | Width | 250 | 250.5 | 251 |
| | | Thickness | - | - | 4 |
| Electrical Interface | | 2 Lane eDP 1.2 | | | |
| Glass Thickness | [mm] | 0.5 | | | |



Product Specification

AU OPTRONICS CORPORATION


| | | |
|---|--------------|-------------------------|
| Surface Treatment | | Anti-Glare, Hardness 3H |
| Support Color | | 6-bit |
| Temperature Range Operating Storage (Non-Operating) | [°C] [°C] | 0 to +50 -20 to +60 |
| RoHS Compliance | | RoHS Compliance |

2.2 Optical Characteristics


The optical characteristics are measured under stable conditions at 25°C (Room Temperature) :

| Item | | Symbol | Conditions | Min. | Typ. | Max. | Unit | Note | |
|---|-------|----------|--------------------------------------|----------|----------|--------|--------|----------|---|
| White Luminance ILED=22mA (Base Panel Only) | | | 5 points average | 255 | 300 | - | cd/m2 | 1, 4, 5. | |
| Viewing Angle | | θR θL | Horizontal (Right) CR = 10 (Left) | 85 85 | 89 89 | - - | degree | 4, 9 | |
| | | ψH ψL | Vertical (Upper) CR = 10 (Lower) | 85 85 | 89 89 | - - | | | |
| Luminance Uniformity | | δ5P | 5 Points | - | - | 1.25 | | 1, 3, 4 | |
| Luminance Uniformity | | δ13P | 13 Points | - | - | 1.53 | | 2, 3, 4 | |
| Contrast Ratio | | CR | | - | 700 | - | | 4, 6 | |
| Cross talk | | % | | | | 4 | | 4, 7 | |
| Response Time | | TRT | Rising + Falling | - | 25 | 35 | | | |
| Color / Chromaticity Coodinates | Red | Rx | CIE 1931 | 0.608 | 0.638 | 0.668 | | 4 | |
| | | Ry | | 0.307 | 0.337 | 0.367 | | | |
| | Green | Gx | | 0.292 | 0.322 | 0.352 | | | |
| | | Gy | | 0.580 | 0.610 | 0.640 | | | |
| | Blue | Bx | | 0.121 | 0.151 | 0.181 | | | |
| | | By | | 0.018 | 0.048 | 0.078 | | | |
| | | Wx | | 0.283 | 0.313 | 0.343 | | | |
| | White | Wy | | 0.299 | 0.329 | 0.359 | | | |
| | | NTSC | | % | - | 72 | | | - |

Note 1: 5 points position (Ref: Active area)

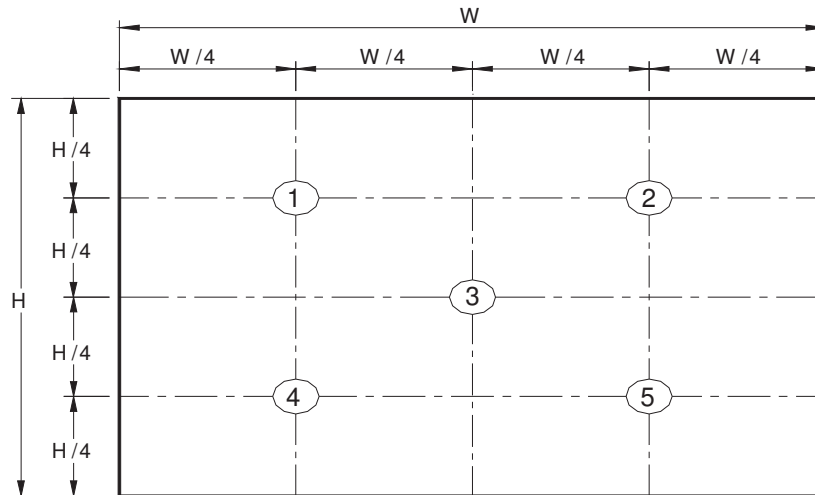

Note 2: 13 points position (Ref: Active area)

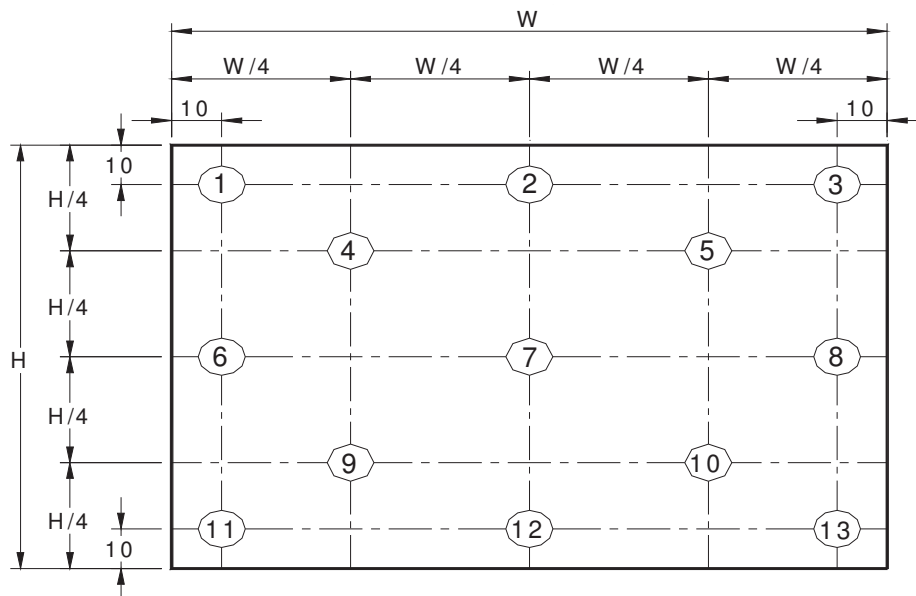

Note 3: The luminance uniformity of 5 or 13 points is defined by dividing the maximum luminance values by the minimum test point luminance


$$\delta_{W5} = \frac{\text{Maximum Brightness of five points}}{\text{Minimum Brightness of five points}}$$

$$\delta_{W13} = \frac{\text{Maximum Brightness of thirteen points}}{\text{Minimum Brightness of thirteen points}}$$

Note 4: Measurement method

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting

Backlight for 30 minutes in a stable, windless and dark room, and it should be measured in the center of screen.

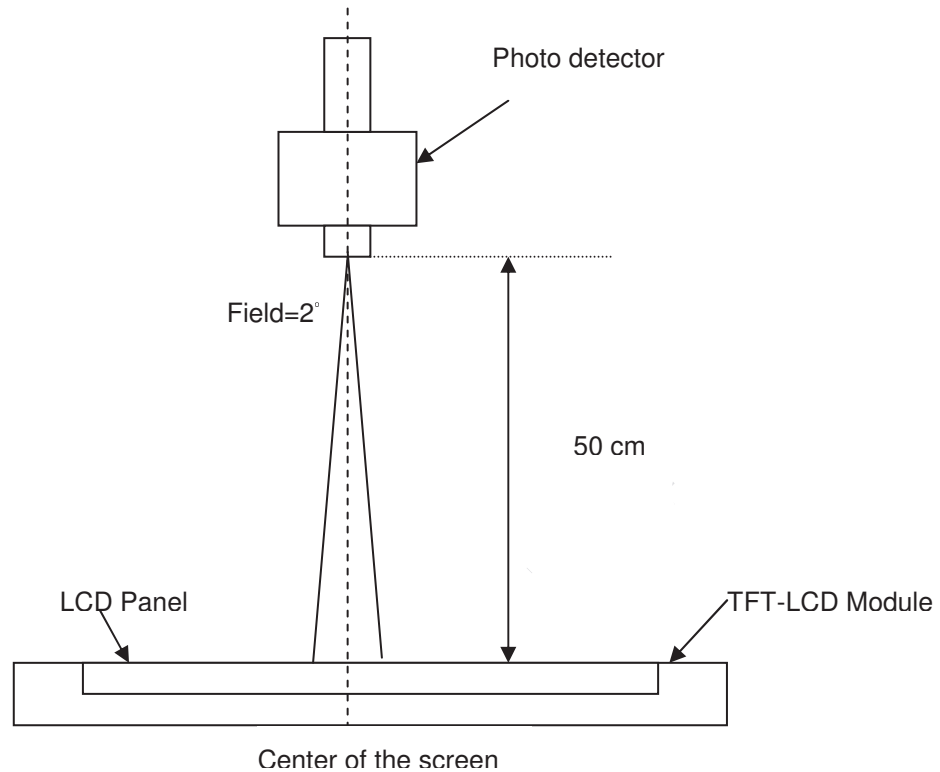

Note 5 : Definition of Average Luminance of White (Y_L):

Measure the luminance of gray level 63 at 5 points , $Y_L = [L (1) + L (2) + L (3) + L (4) + L (5)] / 5$

$L (x)$ is corresponding to the luminance of the point X at Figure in Note (1).

Note 6 : Definition of contrast ratio:

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$


Note 7 : Definition of Cross Talk (CT)

$$CT = |Y_B - Y_A| / Y_A \times 100 (\%)$$

Where


Y_A = Luminance of measured location without gray level 0 pattern (cd/m²)

Y_B = Luminance of measured location with gray level 0 pattern (cd/m²)

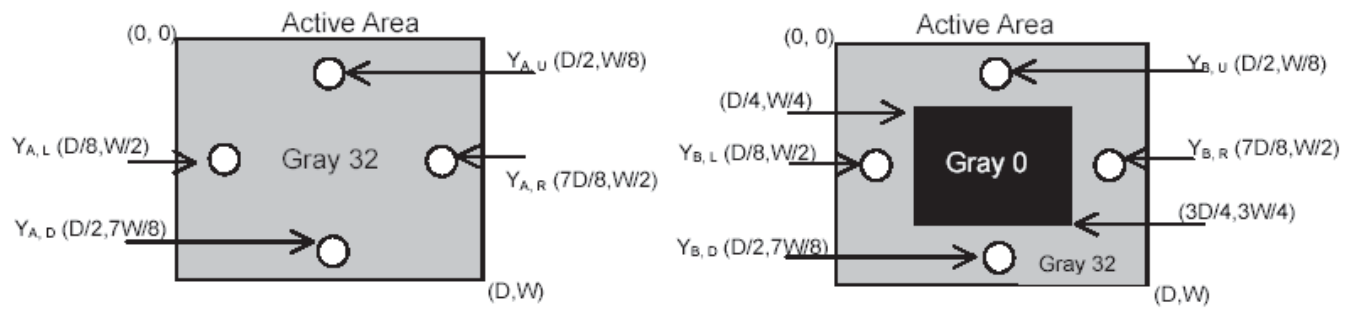


Note 8: Definition of response time:

The output signals of BM-7 or equivalent are measured when the input signals are changed from "Black" to "White" (falling time) and from "White" to "Black" (rising time), respectively. The response time interval between the 10% and 90% of amplitudes. Refer to figure as below.

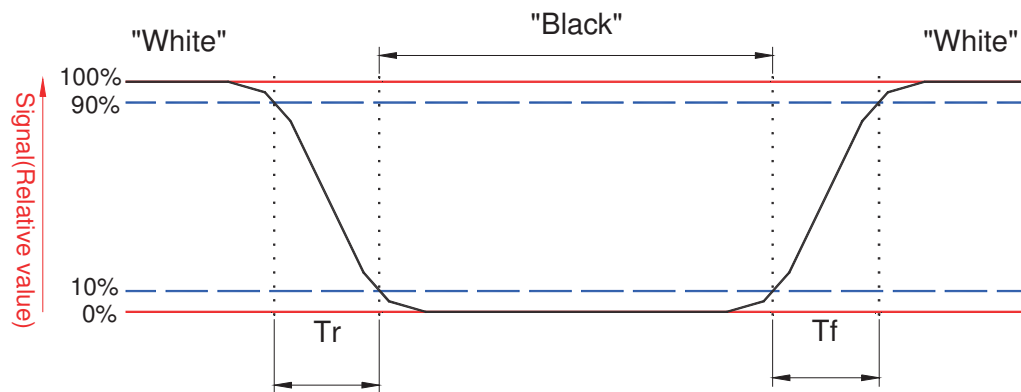


Note 9. Definition of viewing angle

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as follows; 90° (θ) horizontal left and right and 90° (Φ) vertical, high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated about its center to develop the desired measurement viewing angle.

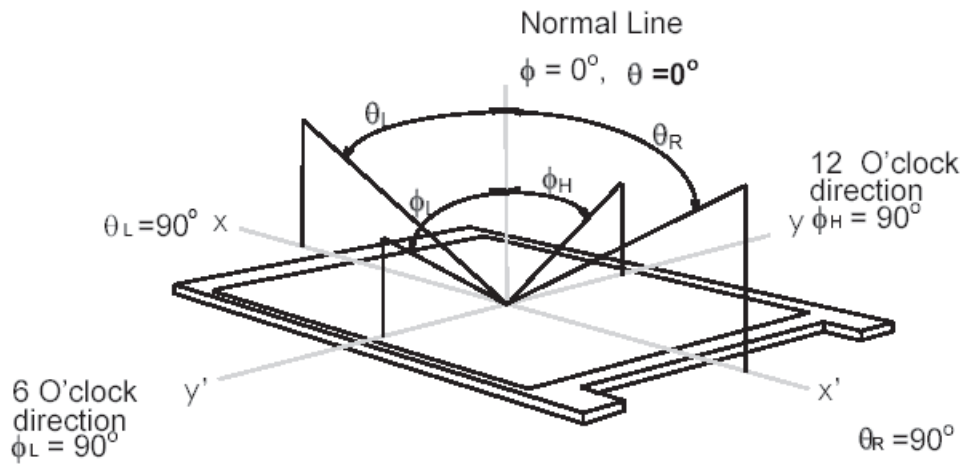

3. Functional Block Diagram

The following diagram shows the functional block of the 17.3 inches wide Color TFT/LCD 30 Pin

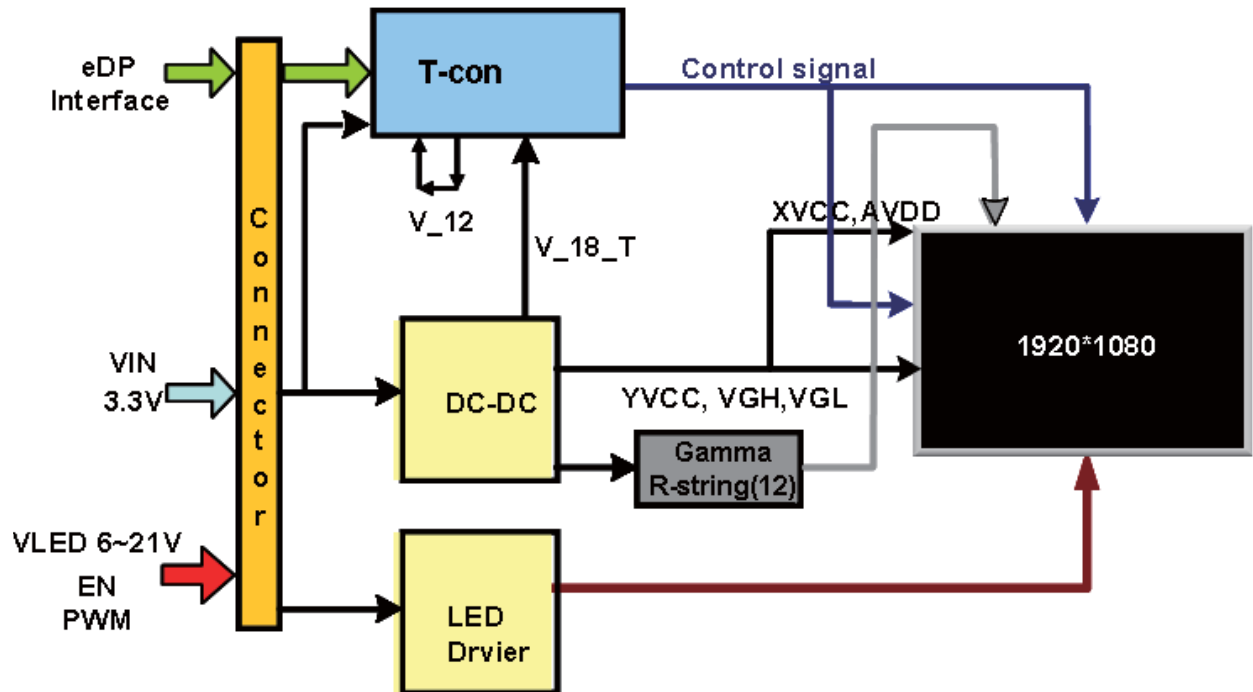

4. Absolute Maximum Ratings

An absolute maximum rating of the module is as following:

4.1 Absolute Ratings of TFT LCD Module

| Item | Symbol | Min | Max | Unit | Conditions |
|-------------------------|--------|------|------|--------|------------|
| Logic/LCD Drive Voltage | Vin | -0.3 | +4.0 | [Volt] | Note 1,2 |

4.2 Absolute Ratings of Environment

| Item | Symbol | Min | Max | Unit | Conditions |
|-----------------------|--------|-----|-----|-------|------------|
| Operating Temperature | TOP | 0 | +50 | [°C] | Note 4 |
| Operation Humidity | HOP | 5 | 95 | [%RH] | Note 4 |
| Storage Temperature | TST | -20 | +60 | [°C] | Note 4 |
| Storage Humidity | HST | 5 | 95 | [%RH] | Note 4 |

Note 1: At Ta (25°C)

Note 2: Permanent damage to the device may occur if exceed maximum values


Note 3: LED specification refer to section 5.2

Note 4: For quality performance, please refer to AUO IIS (Incoming Inspection Standard).

Note 5: The packing material of system forbid to involve ammonium component

Note 6: The reliability test conditions of system do not exceed the verified conditions of TFT module

Note 7: Be sure the panel test condition do not exceed the component limitation of TFT module(TN Liquid crystal , for example)

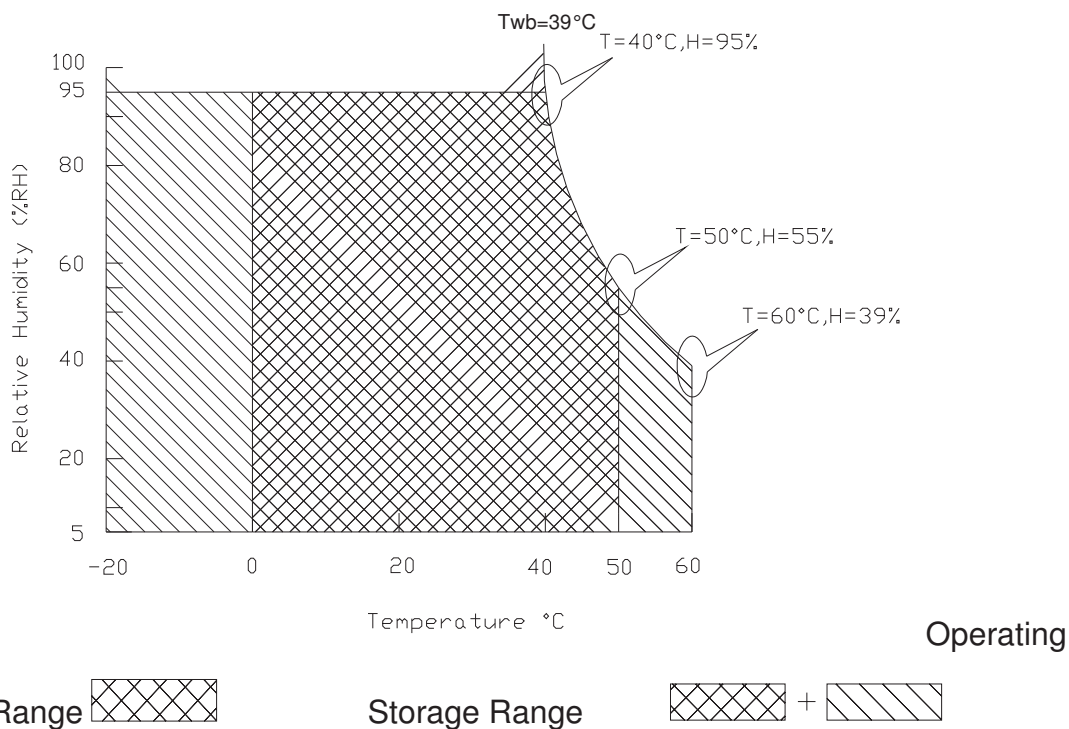

5. Electrical Characteristics

5.1 TFT LCD Module

5.1.1 Power Specification



Input power specifications are as follows;

The power specification are measured under 25°C and frame frequency under 60Hz

| Symble | Parameter | Min | Typ | Max | Units | Note |
|--------|------------------|-----|-----|-------|--------|--------|
| VDD | Logic/LCD Drive | 3.0 | 3.3 | 3.6 | [Volt] | |
| PDD | VDD Power | - | - | 1.1 | [Watt] | Note 1 |
| IDD | IDD Current(RMS) | - | - | 366.7 | [mA] | Note 1 |
| IRush | Inrush Current | - | - | 1500 | [mA] | Note 2 |
| VDDrp | Allowable | - | - | 100 | [mV] | |
| Symble | Parameter | Min | Typ | Max | Units | Note |

Note 1 : Maximum Measurement Condition : Mosaic pattern (PDD (max) = VDD(min) x IDD(max))

Note 2 : Measure Condition

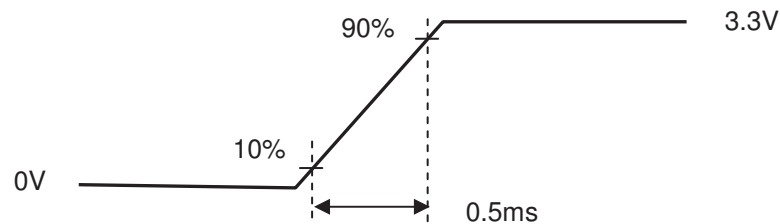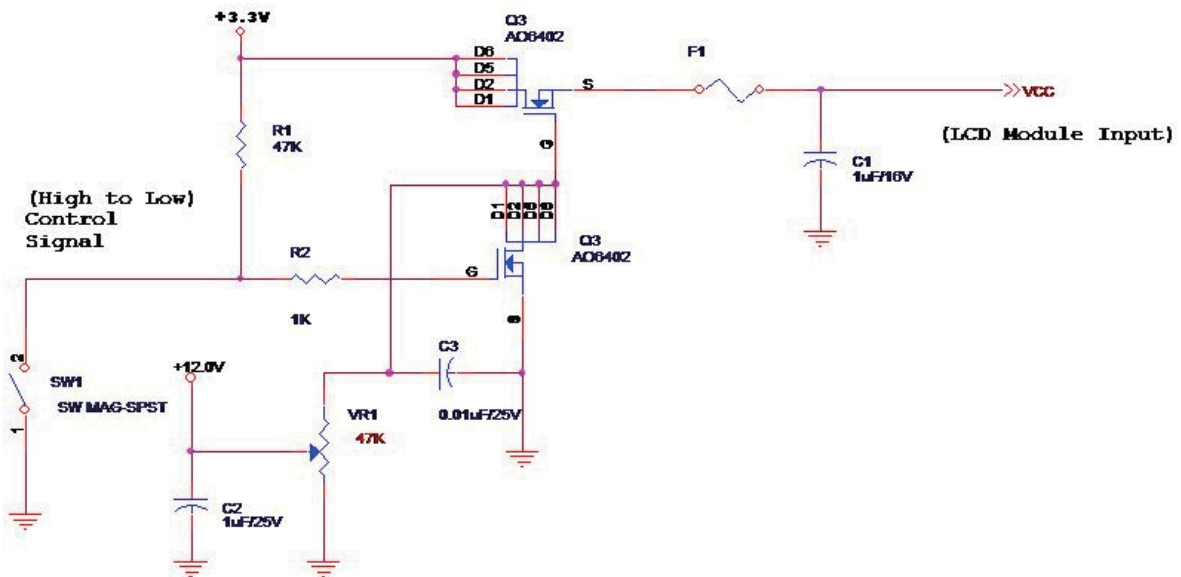


Vin rising time

5.1.2 Signal Electrical Characteristics

Input signals shall be low or High-impedance state when VDD is off.

Signal electrical characteristics are as follows;


Display Port main link signal:

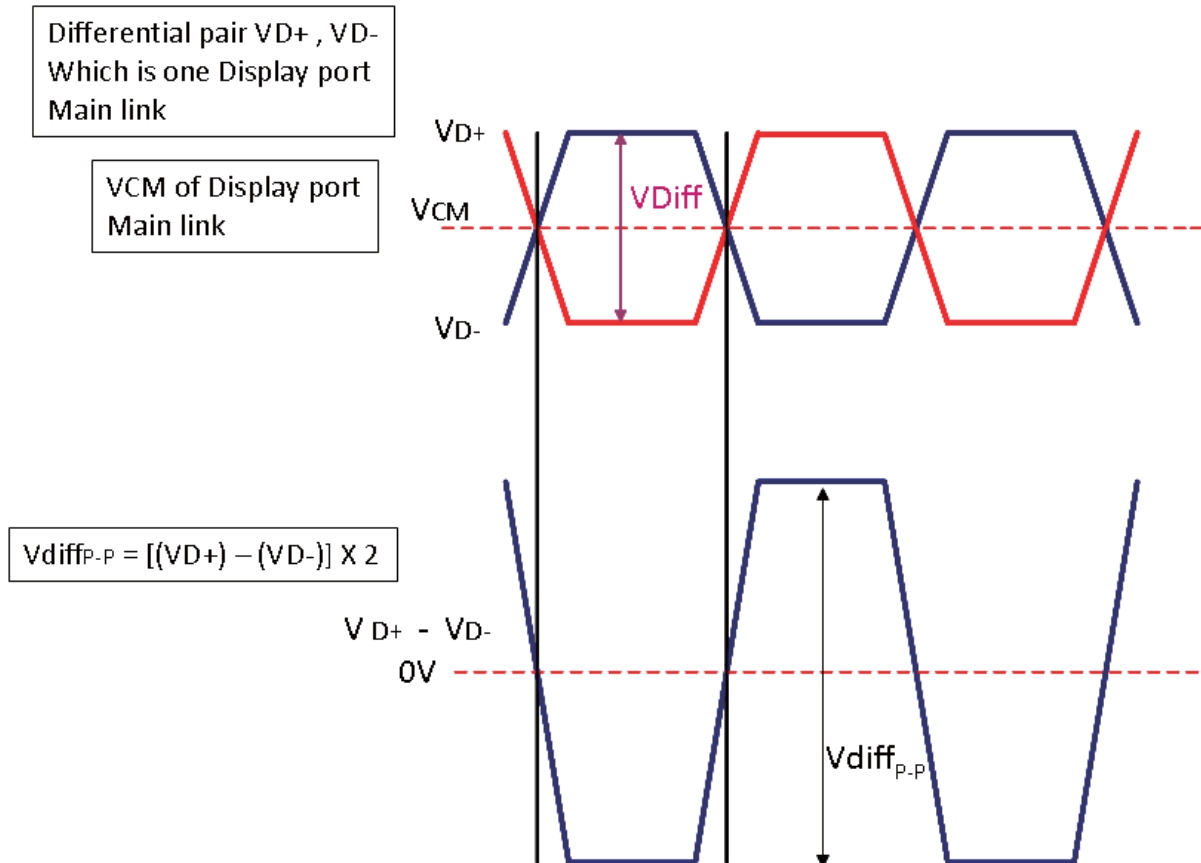

| Display port main link | | | | | |
|------------------------|--|-----|-----|------|------|
| | | Min | Typ | Max | unit |
| VCM | RX input DC Common Mode Voltage | | 0 | | V |
| VDiff _{P-P} | Peak-to-peak Voltage at a receiving Device | 100 | | 1320 | mV |

Fallow as VESA display port standard V1.1 a

Display Port AUX_CH signal:

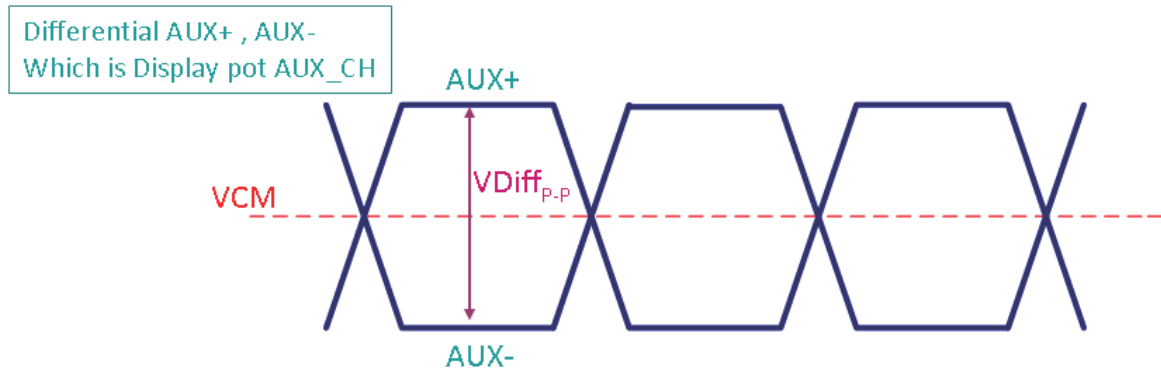

| Display port AUX_CH | | | | | |
|----------------------|--|-----|-----|-----|------|
| | | Min | Typ | Max | unit |
| VCM | AUX DC Common Mode Voltage | | 0 | | V |
| VDiff _{P-P} | AUX Peak-to-peak Voltage at a receiving Device | 270 | | 800 | mV |

Fallow as VESA display port standard V1.1a

Display Port VHPD signal:

| Display port VHPD | | | | | |
|-------------------|-------------|------|-----|-----|------|
| | | Min | Typ | Max | unit |
| VHPD | HPD Voltage | 2.25 | | 3.6 | V |

Fallow as VESA display port standard V1.1a

5.2 Backlight Unit

5.2.1 LED characteristics

| Parameter | Symbol | Min | Typ | Max | Units | Condition |
|-----------------------------|--------|--------|-----|-----|--------|------------------------|
| Backlight Power Consumption | PLED | - | - | 5.8 | [Watt] | (Ta=25 °C), Note 1 |
| LED Life-Time | N/A | 15,000 | - | - | Hour | (Ta=25 °C), Note 2 |

Note 1: Calculator value for reference $P_{LED} = VF$ (Normal Distribution) * IF (Normal Distribution) / Efficiency

Note 2: The LED life-time define as the estimated time to 50% degradation of initial luminous.

5.2.2 Backlight input signal characteristics


| Parameter | Symbol | Min | Typ | Max | Units | Remark |
|-----------------------------|---------|-----|------|------|--------|--|
| LED Power Supply | VLED | 6.0 | 12.0 | 21.0 | [Volt] | Define as Connector Interface (Ta=25°C) |
| LED Enable Input High Level | VLED_EN | 2.5 | - | 5.5 | [Volt] | |
| LED Enable Input Low Level | | - | - | 0.5 | [Volt] | |
| PWM Logic Input High Level | VPWM_EN | 2.5 | - | 5.5 | [Volt] | |
| PWM Logic Input Low Level | | - | - | 0.5 | [Volt] | |
| PWM Input Frequency | FPWM | 200 | 1K | 10K | Hz | |
| PWM Duty Ratio | Duty | 5 | -- | 100 | % | |

Note 1 : Recommend system pull up/down resistor no bigger than 10kohm

6. Signal Interface Characteristic

6.1 Pixel Format Image

Following figure shows the relationship of the input signals and LCD pixel format.

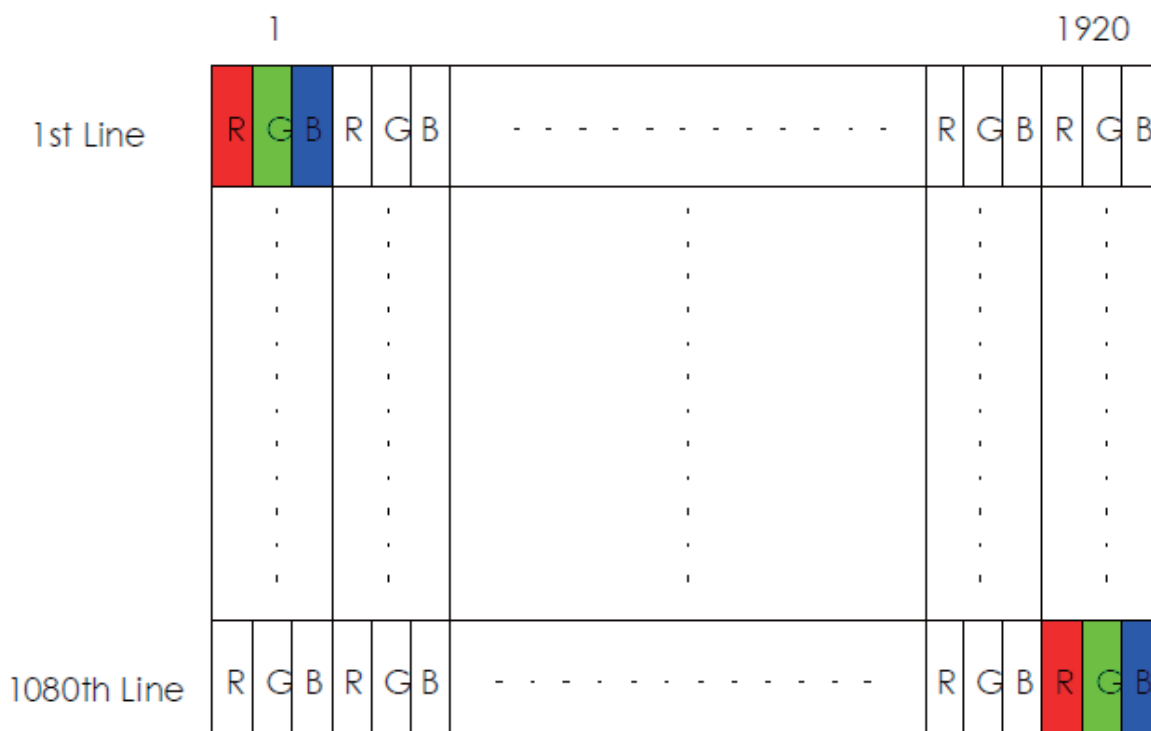



6.2 Integration Interface Requirement

6.2.1 Connector Description

Physical interface is described as for the connector on module.


These connectors are capable of accommodating the following signals and will be following components.

| Connector Name / Designation | For Signal Connector |
|------------------------------|-----------------------------------|
| Manufacturer | SIN SHENG TERMINAL & MACHINE INC. |
| Type / Part Number | MSAK24025P30 or compatible |
| Mating Housing/Part Number | I-PEX 20453-030T-11 or compatible |

6.2.2 Pin Assignment (2 Lane)


| PIN NO | Symbol | Function |
|--------|---------------|-------------------------------|
| 1 | NC | NC |
| 2 | H_GND | High Speed Ground |
| 3 | Lane1_N | Complement Signal Link Lane 1 |
| 4 | Lane1_P | True Signal Link Lane 1 |
| 5 | H_GND | High Speed Ground |
| 6 | Lane0_N | Comp Signal Link Lane 0 |
| 7 | Lane0_P | True Signal Link Lane 0 |
| 8 | H_GND | High Speed Ground |
| 9 | AUX_CH_P | True Signal Auxiliary Ch. |
| 10 | AUX_CH_N | Comp Signal Auxiliary Ch. |
| 11 | H_GND | High Speed Ground |
| 12 | LCD_VCC | LCD logic and driver power |
| 13 | LCD_VCC | LCD logic and driver power |
| 14 | LCD_Self_Test | LCD Panel Self Test Enable |
| 15 | LCD_GND | LCD logic and driver ground |
| 16 | LCD_GND | LCD logic and driver ground |
| 17 | HPD | HPD signal pin |
| 18 | BL_GND | Backlight_ground |
| 19 | BL_GND | Backlight_ground |
| 20 | BL_GND | Backlight_ground |
| 21 | BL_GND | Backlight_ground |
| 22 | BL_Enable | Backlight On / Off |
| 23 | BL_PWM_DIM | System PWM signal Input |
| 24 | NC | NC |
| 25 | NC | NC |
| 26 | BL_PWR | Backlight power (6V~21V) |
| 27 | BL_PWR | Backlight power (6V~21V) |
| 28 | BL_PWR | Backlight power (6V~21V) |
| 29 | BL_PWR | Backlight power (6V~21V) |
| 30 | NC | NC |

eDP lane is a differential signal technology for LCD interface and high speed data transfer device.

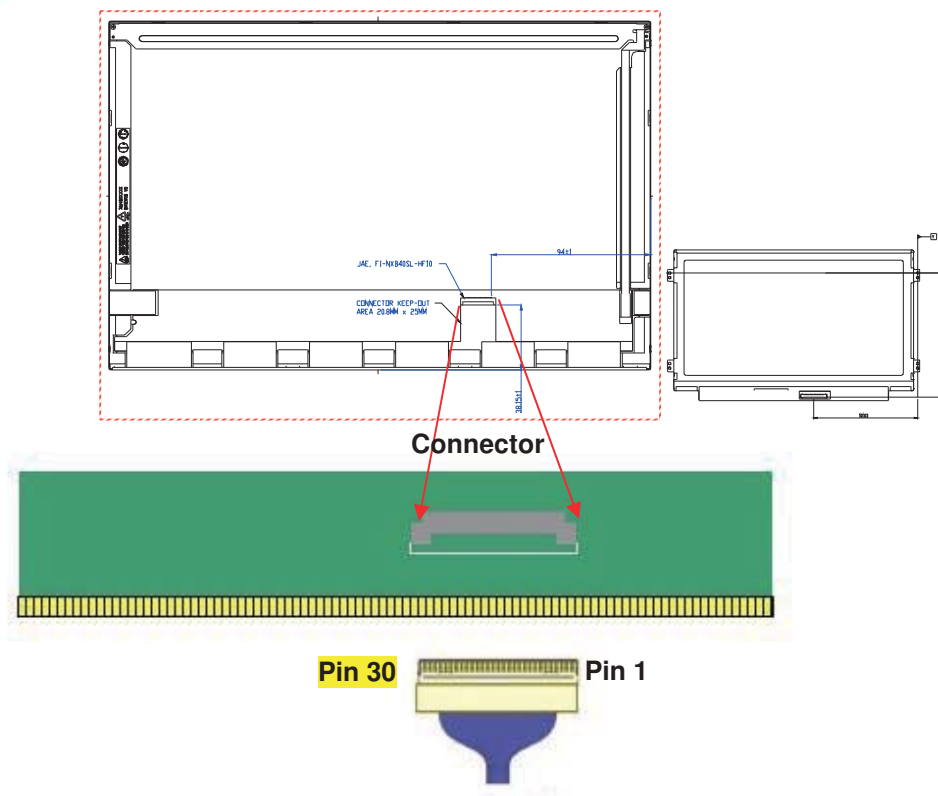

Note1: Start from right side.

Note2: Input signals shall be low or High-impedance state when VDD is off.
Internal circuit of **eDP inputs** are as following.

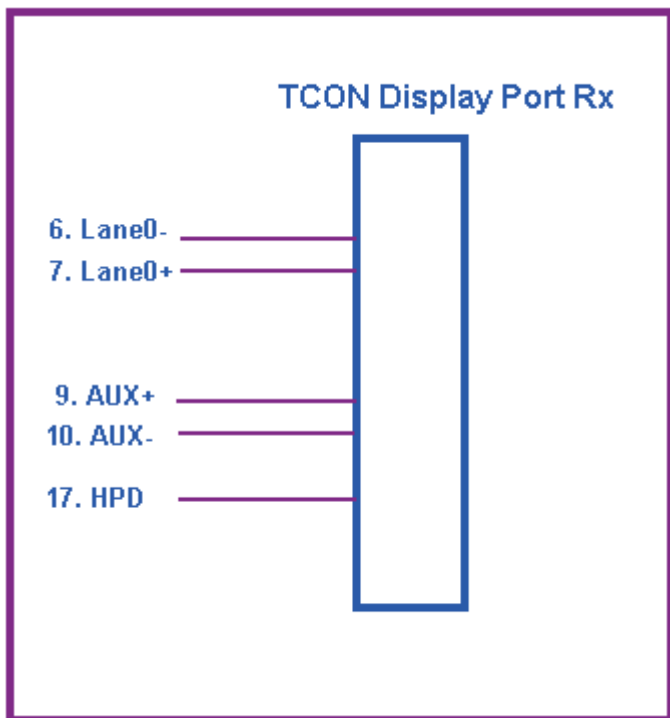

6.3 Interface Timing

6.3.1 Timing Characteristics

For normal display, interface timings should match the 1920*1080 /60Hz manufacturing guide line timing.


| Parameter | | Symbol | Min. | Typ. | Max. | Unit |
|-----------------------|----------|-----------------------|------|-------|--------|--------------------|
| Frame Rate | | - | - | 60 | - | Hz |
| Clock frequency | | 1/ T _{Clock} | | 143.6 | | MHz |
| Vertical Section | Period | T _V | 1088 | 1116 | 1080+A | T _{Line} |
| | Active | T _{VD} | 1080 | | | |
| | Blanking | T _{VB} | 8 | 36 | A | |
| Horizontal Section | Period | T _H | 2072 | 2140 | 1920+B | T _{Clock} |
| | Active | T _{HD} | 1920 | | | |
| | Blanking | T _{HB} | 152 | 220 | B | |

Note 1 : The above is as optimized setting

Note 2 : The maximum clock frequency = $(1920+B) \times (1080+A) \times 60 < 160\text{MHz}$


6.4 Power ON/OFF Sequence

Display Port panel power sequence:

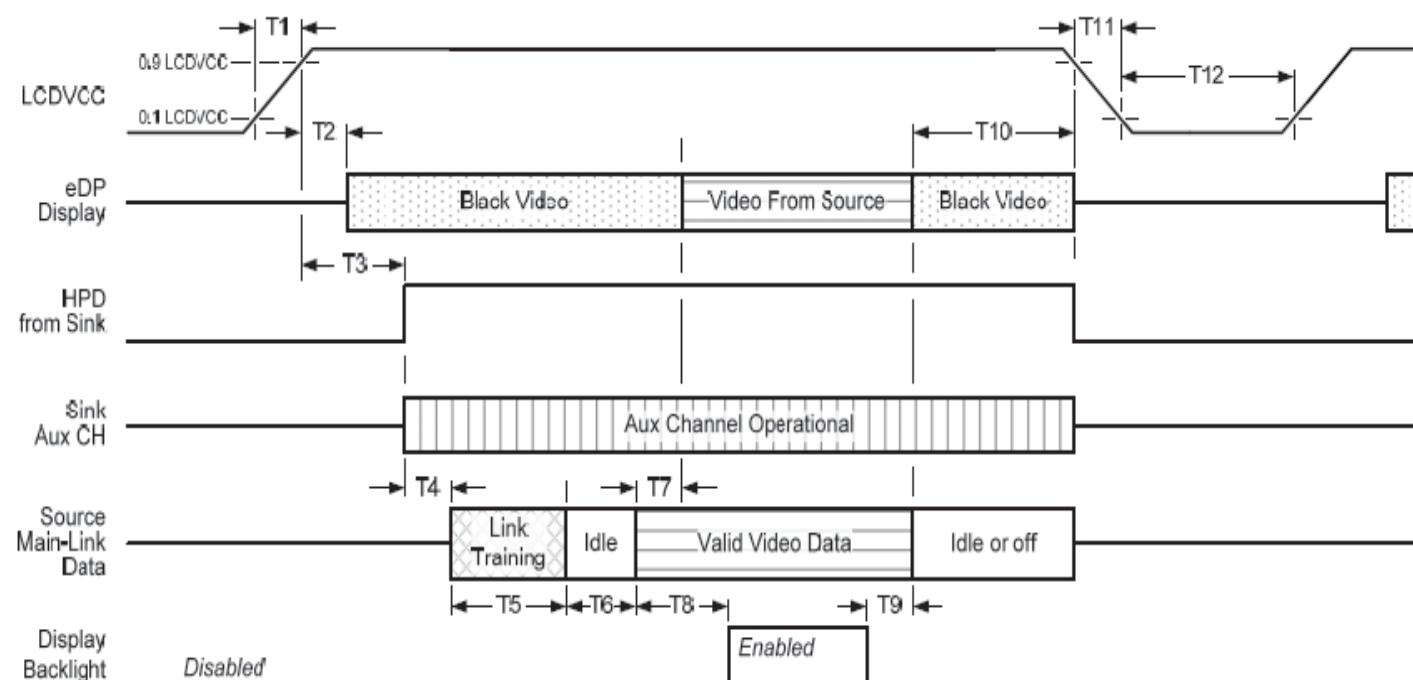

Display port interface power up/down sequence, normal system operation

Display Port AUX_CH transaction only:

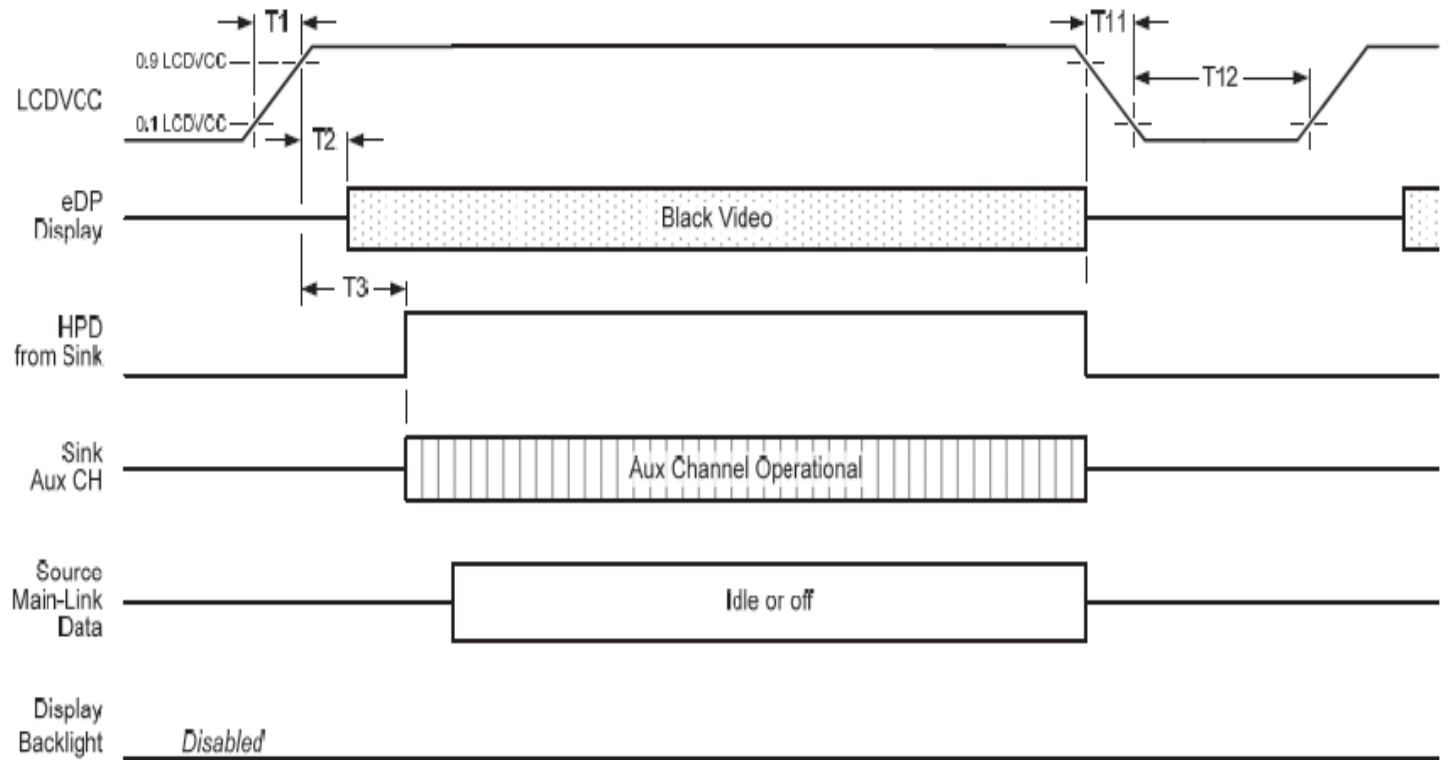

Display port interface power up/down sequence, AUX_CH transaction only



Product Specification

AU OPTRONICS CORPORATION

Display Port panel power sequence timing parameter:

| Timing parameter | Description | Reqd. by | Limits | | | Notes |
|------------------|---|----------|--------|------|-------|--|
| | | | Min. | Typ. | Max. | |
| T1 | power rail rise time, 10% to 90% | source | 0.5ms | | 10ms | |
| T2 | delay from LCDVDD to black video generation | sink | 0ms | | 200ms | prevents display noise until valid video data is received from the source |
| T3 | delay from LCDVDD to HPD high | sink | 0ms | | 200ms | sink AUX_CH must be operational upon HPD high. |
| T4 | delay from HPD high to link training initialization | source | | | | allows for source to read link capability and initialize. |
| T5 | link training duration | source | | | | dependant on source link to read training protocol. |
| T6 | link idle | source | | | | Min accounts for required BS-Idle pattern. Max allows for source frame synchronization. |
| T7 | delay from valid video data from source to video on display | sink | 0ms | | 50ms | max allows sink validate video data and timing. |
| T8 | delay from valid video data from source to backlight enable | source | | | | source must assure display video is stable. |
| T9 | delay from backlight disable to end of valid video data | source | | | | source must assure backlight is no longer illuminated. |
| T10 | delay from end of valid video data from source to power off | source | 0ms | | 500ms | |
| T11 | power rail fall time, 90% to 10% | source | | | 10ms | |
| T12 | power off time | source | 500ms | | | |

Note1: The sink must include the ability to generate black video autonomously. The sink must automatically enable black video under the following conditions:


- upon LCDVDD power on (with in T2 max)-when the "Novideostream_Flag" (VB-ID Bit 3) is received from the source (at the end of T9).

- when no main link data, or invalid video data, is received from the source. Black video must be displayed within 64ms (typ) from the start of either condition. Video data can be deemed invalid based on MSA and timing information, for example.


Note 2: The sink may implement the ability to disable the black video function, as described in Note 1, above, for system development and debugging purpose.

Note 3: The sink must support AUX_CH polling by the source immediately following LCDVDD power on without causing damage to the sink device (the source can re-try if the sink is not ready). The sink must be able to respond to an AUX_CH transaction with the time specified within T3 max.

Display Port panel B/L power sequence timing parameter:

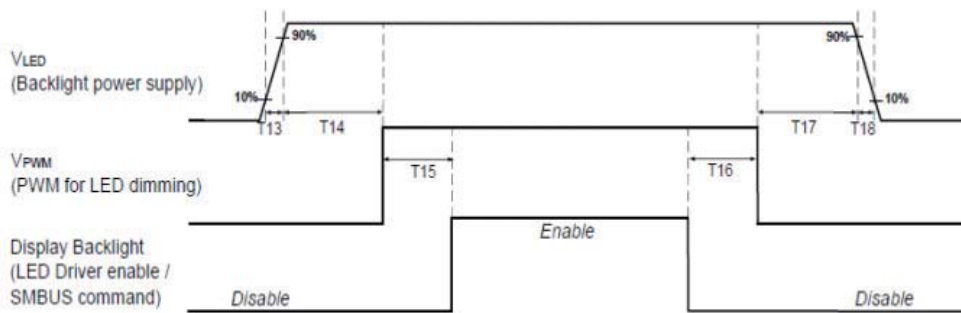

Note : When the adapter is hot plugged, the backlight power supply sequence is shown as below.

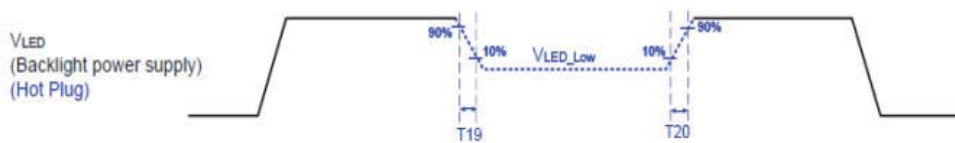

| | Min (ms) | Max (ms) |
|-----|----------|----------|
| T13 | 0.5 | 10 |
| T14 | 10 | - |
| T15 | 0 | - |
| T16 | 0 | - |
| T17 | 10 | - |
| T18 | 0.5 | 10 |
| T19 | 1* | - |
| T20 | 1* | - |

Seamless change: $T19/T20 = 5 \times T_{PWM}^*$

* $T_{PWM} = 1/PWM \text{ Frequency}$

7. Panel Reliability Test

7.1 Vibration Test

Test Spec:

- Test method: Non-Operation
- Acceleration: 1.5 G
- Frequency: 10 - 500Hz Random
- Sweep: 30 Minutes each Axis (X, Y, Z)

7.2 Shock Test

Test Spec:


- Test method: Non-Operation
- Acceleration: 220 G , Half sine wave
- Active time: 2 ms
- Pulse: X,Y,Z .one time for each side

7.3 Reliability Test

| Items | Required Condition | Note |
|----------------------------|---|--------|
| Temperature Humidity Bias | Ta= 40°C , 90%RH, 300h | |
| High Temperature Operation | Ta= 50°C , Dry, 300h | |
| Low Temperature Operation | Ta= 0°C , 300h | |
| High Temperature Storage | Ta= 60°C , 35%RH, 300h | |
| Low Temperature Storage | Ta= -20°C , 50%RH, 250h | |
| Thermal Shock Test | Ta=-20°C to 60°C , Duration at 30 min, 100 cycles | |
| ESD | Contact : ±8 KV Air : ±15 KV | Note 1 |

Note1: According to EN 61000-4-2 , ESD class B: Some performance degradation allowed. Self-recoverable.
No data lost, No hardware failures.

Remark: MTBF (Excluding the LED): 30,000 hours with a confidence level 90%

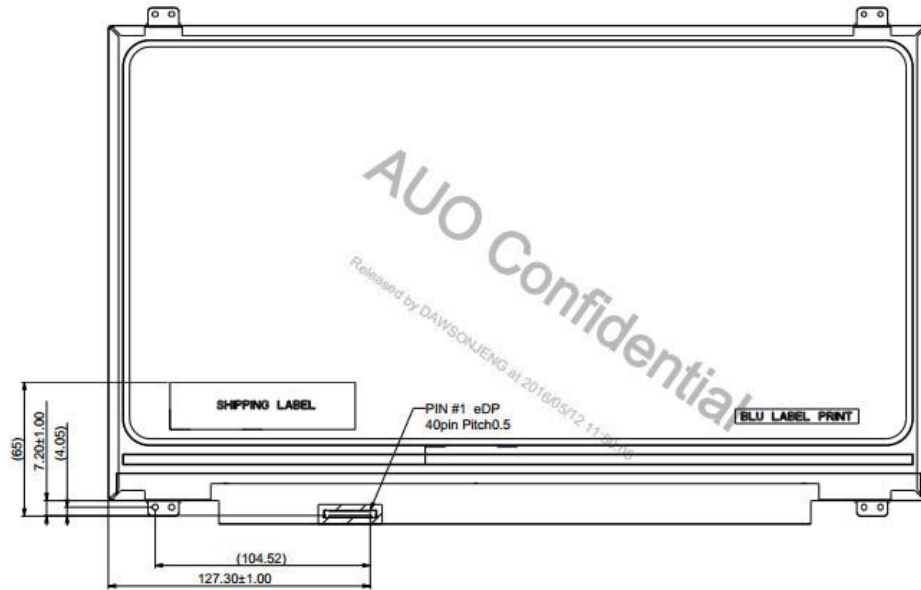


Note: Prevention IC damage, IC positions not allowed any overlap over these areas.

8.2 Screw Hole Depth and Center Position

Maximum Screw penetration from side surface is 2.3 mm






The center of screw hole center location is $3.7 \pm 0.2\text{mm}$ from front surface

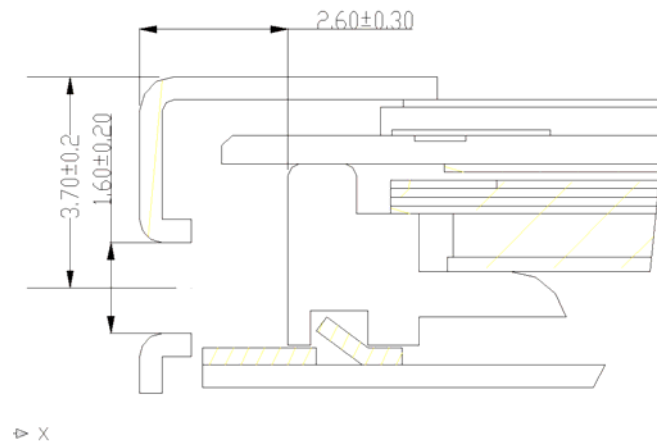




Screw Torque: Maximum 2.5 kgf-cm








9. Shipping and Package


9.1 Shipping Label Format

| | | |
|---|--|--|
|  | <p>Manufactured MM/WW Model No: B173HAN01.3 AU Optronics MADE IN CHINA (S01)</p> | <p>c  US E204356 </p> |
| <p>XXXXXXXXXXXX-XXXXXX</p> | <p>H/W: 2A F/W:1</p> | <p>RoHS</p> |
|  | |  |
| <p>B173HAN01.3</p> | | |


| | | |
|--|--|--|
|  | <p>Manufactured MM/WW Model No: B173HAN01.3 AU Optronics MADE IN CHINA (Z40)</p> | <p>c  US E204356 </p> |
| <p>XXXXXXXXXXXX-XXXXXX</p> | <p>H/W: 2A F/W:1</p> | <p>RoHS</p> |
|  | |  |
| <p>B173HAN01.3</p> | | |

| | | |
|---|--|--|
|  | <p>Manufactured MM/WW Model No: B173HAN01.3 AU Optronics MADE IN CHINA (Z83)</p> | <p>c  US E204356 </p> |
| <p>XXXXXXXXXXXX-XXXXXX</p> | <p>H/W: 2A F/W:1</p> | <p>RoHS</p> |
|  | |  |
| <p>B173HAN01.3</p> | | |

9.2 Carton Package

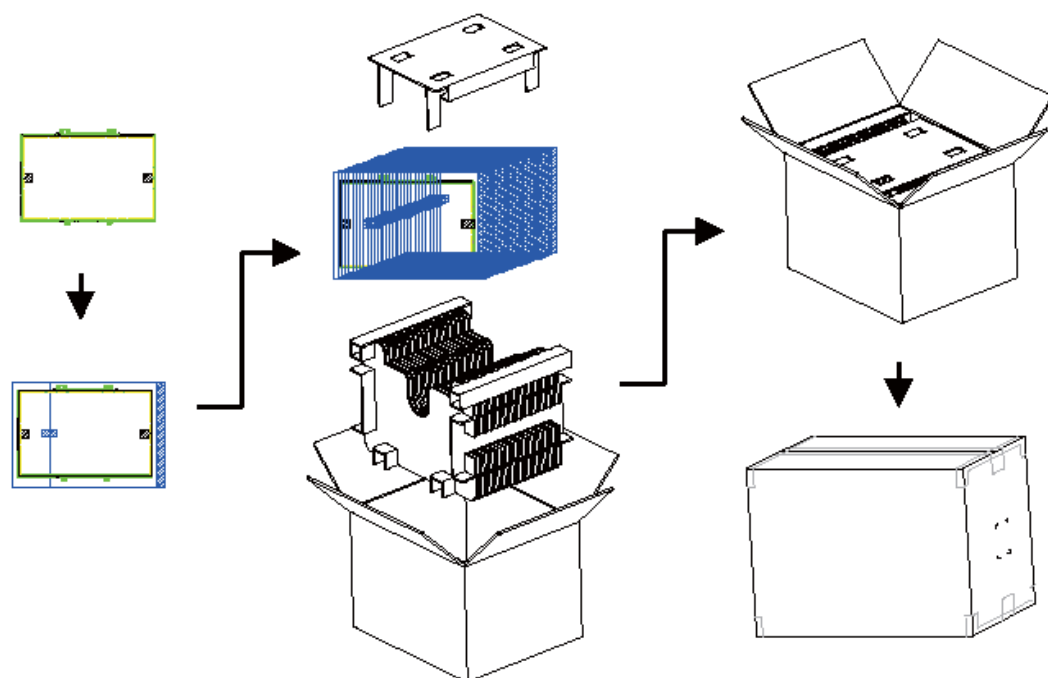

9.3 Shipping Package of Palletizing Sequence

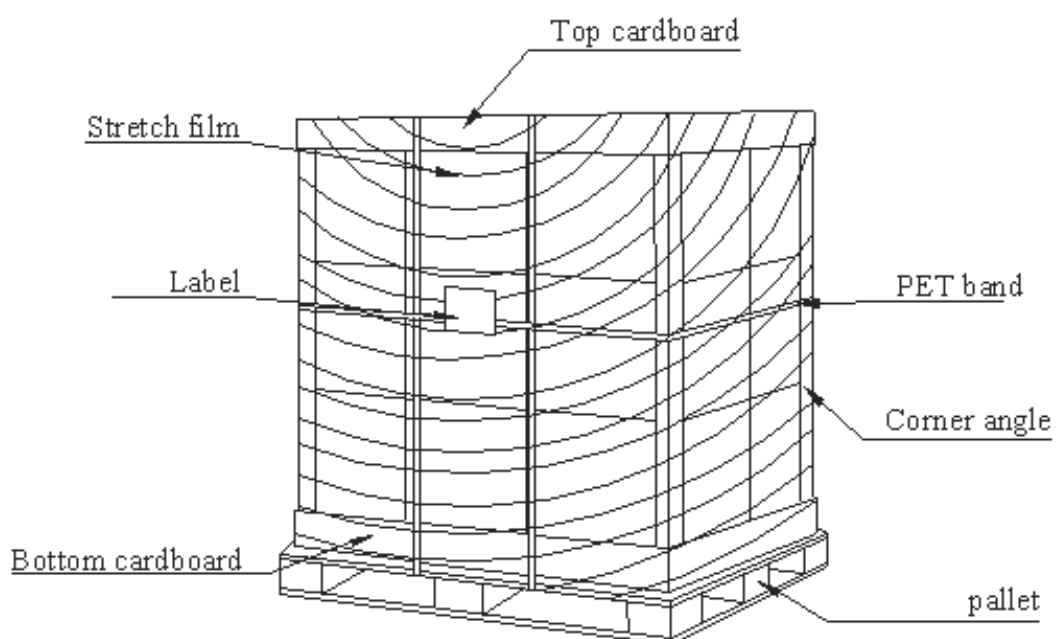



Product Specification

AU OPTRONICS CORPORATION

10. Appendix:

10.1 EDID Description

| Address | FUNCTION | Value | Value | Value | Note |
|---------|--|-------|----------|-------|------|
| HEX | | HEX | BIN | DEC | |
| 00 | Header | 00 | 00000000 | 0 | |
| 01 | | FF | 11111111 | 255 | |
| 02 | | FF | 11111111 | 255 | |
| 03 | | FF | 11111111 | 255 | |
| 04 | | FF | 11111111 | 255 | |
| 05 | | FF | 11111111 | 255 | |
| 06 | | FF | 11111111 | 255 | |
| 07 | | 00 | 00000000 | 0 | |
| 08 | EISA Manuf. Code LSB | 06 | 00000110 | 6 | |
| 09 | Compressed ASCII | AF | 10101111 | 175 | |
| 0A | Product Code | 9D | 10011101 | 157 | |
| 0B | hex, LSB first | 13 | 00010011 | 19 | |
| 0C | 32-bit ser # | 00 | 00000000 | 0 | |
| 0D | | 00 | 00000000 | 0 | |
| 0E | | 00 | 00000000 | 0 | |
| 0F | | 00 | 00000000 | 0 | |
| 10 | Week of manufacture | 01 | 00000001 | 1 | |
| 11 | Year of manufacture | 1B | 00011011 | 27 | |
| 12 | EDID Structure Ver. | 01 | 00000001 | 1 | |
| 13 | EDID revision # | 04 | 00000100 | 4 | |
| 14 | Video input def. (digital I/P, non-TMDS, CRGB) | 95 | 10010101 | 149 | |
| 15 | Max H image size (rounded to cm) | 26 | 00100110 | 38 | |
| 16 | Max V image size (rounded to cm) | 15 | 00010101 | 21 | |
| 17 | Display Gamma $(=(\text{gamma} \times 100) - 100)$ | 78 | 01111000 | 120 | |
| 18 | Feature support (no DPMS, Active OFF, RGB, tmg Blk#1) | 02 | 00000010 | 2 | |
| 19 | Red/green low bits (Lower 2:2:2:2 bits) | 59 | 01011001 | 89 | |
| 1A | Blue/white low bits (Lower 2:2:2:2 bits) | D5 | 11010101 | 213 | |
| 1B | Red x (Upper 8 bits) | A3 | 10100011 | 163 | |
| 1C | Red y/ highER 8 bits | 56 | 01010110 | 86 | |
| 1D | Green x | 52 | 01010010 | 82 | |
| 1E | Green y | 9C | 10011100 | 156 | |
| 1F | Blue x | 26 | 00100110 | 38 | |
| 20 | Blue y | 0C | 00001100 | 12 | |
| 21 | White x | 50 | 01010000 | 80 | |
| 22 | White y | 54 | 01010100 | 84 | |
| 23 | Established timing 1 | 00 | 00000000 | 0 | |
| 24 | Established timing 2 | 00 | 00000000 | 0 | |
| 25 | Established timing 3 | 00 | 00000000 | 0 | |
| 26 | Standard timing #1 | 01 | 00000001 | 1 | |
| 27 | | 01 | 00000001 | 1 | |
| 28 | Standard timing #2 | 01 | 00000001 | 1 | |



Product Specification

AU OPTRONICS CORPORATION

| | | | | | |
|----|---|----|----------|-----|--|
| 29 | | 01 | 00000001 | 1 | |
| 2A | Standard timing #3 | 01 | 00000001 | 1 | |
| 2B | | 01 | 00000001 | 1 | |
| 2C | Standard timing #4 | 01 | 00000001 | 1 | |
| 2D | | 01 | 00000001 | 1 | |
| 2E | Standard timing #5 | 01 | 00000001 | 1 | |
| 2F | | 01 | 00000001 | 1 | |
| 30 | Standard timing #6 | 01 | 00000001 | 1 | |
| 31 | | 01 | 00000001 | 1 | |
| 32 | Standard timing #7 | 01 | 00000001 | 1 | |
| 33 | | 01 | 00000001 | 1 | |
| 34 | Standard timing #8 | 01 | 00000001 | 1 | |
| 35 | | 01 | 00000001 | 1 | |
| 36 | Pixel Clock/10000 LSB | 18 | 00011000 | 24 | |
| 37 | Pixel Clock/10000 USB | 38 | 00111000 | 56 | |
| 38 | Horz active Lower 8bits | 80 | 10000000 | 128 | |
| 39 | Horz blanking Lower 8bits | DC | 11011100 | 220 | |
| 3A | HorzAct:HorzBlnk Upper 4:4 bits | 70 | 01110000 | 112 | |
| 3B | Vertical Active Lower 8bits | 38 | 00111000 | 56 | |
| 3C | Vertical Blanking Lower 8bits | 24 | 00100100 | 36 | |
| 3D | Vert Act : Vertical Blanking (upper 4:4 bit) | 40 | 01000000 | 64 | |
| 3E | HorzSync. Offset | 10 | 00010000 | 16 | |
| 3F | HorzSync.Width | 10 | 00010000 | 16 | |
| 40 | VertSync.Offset : VertSync.Width | 3E | 00111110 | 62 | |
| 41 | Horz&Vert Sync Offset/Width Upper 2bits | 00 | 00000000 | 0 | |
| 42 | Horizontal Image Size Lower 8bits | 7D | 01111101 | 125 | |
| 43 | Vertical Image Size Lower 8bits | D6 | 11010110 | 214 | |
| 44 | Horizontal & Vertical Image Size (upper 4:4 bits) | 10 | 00010000 | 16 | |
| 45 | Horizontal Border <i>(zero for internal LCD)</i> | 00 | 00000000 | 0 | |
| 46 | Vertical Border <i>(zero for internal LCD)</i> | 00 | 00000000 | 0 | |
| 47 | Signal <i>(non-intr, norm, no stero, sep sync, neg pol)</i> | 18 | 00011000 | 24 | |
| 48 | Detailed timing/monitor | 00 | 00000000 | 0 | |
| 49 | descriptor #2 | 00 | 00000000 | 0 | |
| 4A | | 00 | 00000000 | 0 | |
| 4B | | 0F | 00001111 | 15 | |
| 4C | | 00 | 00000000 | 0 | |
| 4D | | 00 | 00000000 | 0 | |
| 4E | | 00 | 00000000 | 0 | |
| 4F | | 00 | 00000000 | 0 | |
| 50 | | 00 | 00000000 | 0 | |
| 51 | | 00 | 00000000 | 0 | |
| 52 | | 00 | 00000000 | 0 | |
| 53 | | 00 | 00000000 | 0 | |
| 54 | | 00 | 00000000 | 0 | |
| 55 | | 00 | 00000000 | 0 | |



Product Specification

AU OPTRONICS CORPORATION

| | | | | | |
|----|-------------------------|----|----------|-----|---|
| 56 | | 00 | 00000000 | 0 | |
| 57 | | 00 | 00000000 | 0 | |
| 58 | | 00 | 00000000 | 0 | |
| 59 | | 20 | 00100000 | 32 | |
| 5A | Detailed timing/monitor | 00 | 00000000 | 0 | |
| 5B | descriptor #3 | 00 | 00000000 | 0 | |
| 5C | | 00 | 00000000 | 0 | |
| 5D | | FE | 11111110 | 254 | |
| 5E | | 00 | 00000000 | 0 | |
| 5F | Manufacture | 41 | 01000001 | 65 | A |
| 60 | Manufacture | 55 | 01010101 | 85 | U |
| 61 | Manufacture | 4F | 01001111 | 79 | O |
| 62 | | 0A | 00001010 | 10 | |
| 63 | | 20 | 00100000 | 32 | |
| 64 | | 20 | 00100000 | 32 | |
| 65 | | 20 | 00100000 | 32 | |
| 66 | | 20 | 00100000 | 32 | |
| 67 | | 20 | 00100000 | 32 | |
| 68 | | 20 | 00100000 | 32 | |
| 69 | | 20 | 00100000 | 32 | |
| 6A | | 20 | 00100000 | 32 | |
| 6B | | 20 | 00100000 | 32 | |
| 6C | Detailed timing/monitor | 00 | 00000000 | 0 | |
| 6D | descriptor #4 | 00 | 00000000 | 0 | |
| 6E | | 00 | 00000000 | 0 | |
| 6F | | FE | 11111110 | 254 | |
| 70 | | 00 | 00000000 | 0 | |
| 71 | Manufacture P/N | 42 | 01000010 | 66 | B |
| 72 | Manufacture P/N | 31 | 00110001 | 49 | 1 |
| 73 | Manufacture P/N | 37 | 00110111 | 55 | 7 |
| 74 | Manufacture P/N | 33 | 00110011 | 51 | 3 |
| 75 | Manufacture P/N | 48 | 01001000 | 72 | H |
| 76 | Manufacture P/N | 41 | 01000001 | 65 | A |
| 77 | Manufacture P/N | 4E | 01001110 | 78 | N |
| 78 | Manufacture P/N | 30 | 00110000 | 48 | 0 |
| 79 | Manufacture P/N | 31 | 00110001 | 49 | 1 |
| 7A | Manufacture P/N | 2E | 00101110 | 46 | . |
| 7B | Manufacture P/N | 33 | 00110011 | 51 | 3 |
| 7C | | 20 | 00100000 | 32 | |
| 7D | | 0A | 00001010 | 10 | |
| 7E | Extension Flag | 00 | 00000000 | 0 | |
| 7F | Checksum | D0 | 11010000 | 208 | |


10.2 Notes

Acer

- 1) The height of cell tape no higher than top polarizer 3.0mm
- 2) Marking DPCD version, including PSR, PSR2, MBO, VESA DSC,...

| DPCD Ver. | PSR | MBO | VESA DSC |
|------------|------------|------------|------------|
| 1.2 | Off | Off | Off |

- 3) LED Driving Solution: Minimum change scale duty of the PWM is 0.1% @PWM frequency 200Hz.
- 4) When twisting or pressing LCD module, it may cause unexpected acoustic noises or sounds.
- 5) Maximum value of "Peak current" is as same as "Inrush current" in Electrical Characteristics (Power Specification)
- 6) $V_{Diff-P-P}$ (Peak-to-peak Voltage at a receiving Device) follow as VESA display port standard (test point, TP3, is on panel's PCBa)

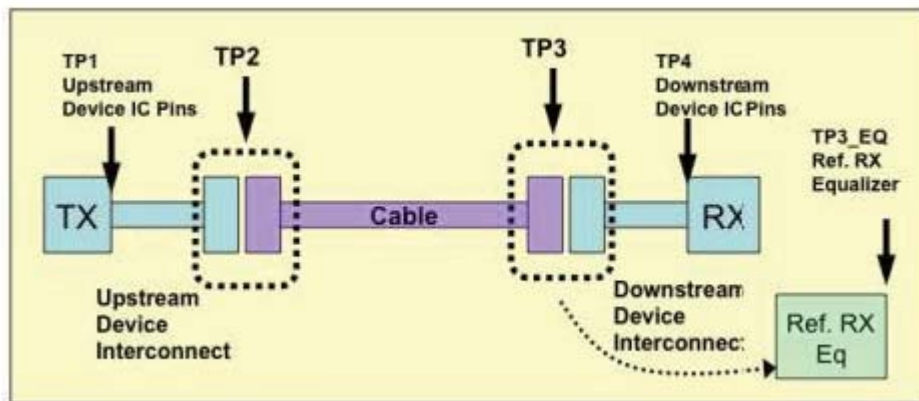

- 7) Suggest ODMs do not use any parts that contain the ingredient of related Ammonium > 5ppb, and other ingredients, if any.
- 8) Suggest ODMs do not interfere with panel after system assembly in order to avoid possible mura, yellow spot, light leakage, water ripple or side defects by mechanical stress test.