



Product Specification

AU OPTRONICS CORPORATION

() Preliminary Specifications

(V) Final Specifications

Module	11.6" HD 16:9 Color TFT-LCD with LED Backlight design
Model Name	B116XAN03.1 (HW: 1 A)
Note	<i>LED Backlight with driving circuit design</i>

Customer	Date
Checked & Approved by	Date
Note: This Specification is subject to change without notice.	

Approved by	Date
Kevin KH Shen	2012/12/10
Prepared by	
Lanie Huang	2012/12/10
NBBU Marketing Division AU Optronics corporation	



Contents

1. Handling Precautions	4
2. General Description	5
2.1 General Specification	5
2.2 Optical Characteristics	6
3. Functional Block Diagram	11
4. Absolute Maximum Ratings	12
4.1 Absolute Ratings of TFT LCD Module	12
4.2 Absolute Ratings of Environment	12
5. Electrical Characteristics	13
5.1 TFT LCD Module	13
5.2 Backlight Unit	20
6. Signal Interface Characteristic	21
6.1 Pixel Format Image	21
6.2 The Input Data Format	22
6.3 Integration Interface Requirement	23
6.4 MIPI Interface Timing	24
6.5 Power ON/OFF Sequence	25
7. Panel Reliability Test	26
7.1 Vibration Test	26
7.2 Shock Test	26
7.3 Reliability Test	27
8. Mechanical Characteristics	28
8.1 LCM Outline Dimension	28
9. Shipping and Package	30
9.1 Shipping Label Format	30
9.2 Carton Package	31
9.3 Shipping Package of Palletizing Sequence	31
10. Appendix	32
10.1 EDID Description	32

Record of Revision

[illegible]



1. Handling Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open nor modify the Module Assembly.
- 8) Do not press the reflector sheet at the back of the module to any directions.
- 9) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) After installation of the TFT Module into an enclosure (Notebook PC Bezel, for example), do not twist nor bend the TFT Module even momentarily. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 12) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 13) Disconnecting power supply before handling LCD modules, it can prevent electric shock, DO NOT TOUCH the electrode parts, cables, connectors and LED circuit part of TFT module that a LED light bar build in as a light source of back light unit. It can prevent electrostatic breakdown.



2. General Description

B116XAN03 V1 is a Color Active Matrix Liquid Crystal Display composed of a TFT LCD panel, a driver circuit, and LED backlight system. The screen format is intended to support the 16:9 HD, 1366(H) x 768(V) screen and 262k colors (RGB 6-bits data driver) with LED backlight driving circuit. All input signals are MIPI interface compatible.

B116XAN03 V1 is designed for a display unit of notebook style personal computer and industrial machine.

2.1 General Specification

The following items are characteristics summary on the table at 25 °C condition:

Items	Unit	Specifications			
Screen Diagonal	[mm]	293.83 (11.6W")			
Active Area	[mm]	256.125 (H) x 144 (V)			
Pixels H x V		1366 x 3(RGB) x 768			
Pixel Pitch	[mm]	0.1875 X 0.1875			
Pixel Format		R.G.B. Vertical Stripe			
Display Mode		Normally Black			
White Luminance	[cd/m ²]	400			
Luminance Uniformity		1.25 max. (5 points) 1.67 max (13 points)			
Contrast Ratio		800 typ.			
Response Time	[ms]	35 Max			
Nominal Input Voltage VDD	[Volt]	+3.3 typ.			
Power Consumption	[Watt]	0.90W Max (Logic) 2.31W Max (B/L)			
Weight	[Grams]	170 max. (W/O Digitizer)			
Physical Size (panel only)	[mm]		Min.	Typ.	Max.
		Length	269.87	270.37	270.87
		Width	159.29	159.79	160.29
		Thickness	---	---	4.8



Product Specification

AU OPTRONICS CORPORATION


Electrical Interface		MIPI
Surface Treatment		Anti-Glare
Support Color		262K colors (RGB 6-bit)
Temperature Range Operating Storage (Non-Operating)	[°C] [°C]	0 to +50 -20 to +60
RoHS Compliance		RoHS Compliance

2.2 Optical Characteristics


The optical characteristics are measured under stable conditions at 25°C (Room Temperature) :

Item		Symbol	Conditions	Min.	Typ.	Max.	Unit	Note
White Luminance			5 points average	340	400	---	cd/m ²	1, 4, 5.
Viewing Angle		θ_R θ_L	Horizontal (Right) CR = 10 (Left)	---	85 85	---	degree	4, 9
		ψ_H ψ_L	Vertical (Upper) CR = 10 (Lower)	---	85 85	---		
Luminance Uniformity		δ_{5P}	5 Points	---	---	1.25		1, 3, 4
Luminance Uniformity		δ_{13P}	13 Points	---	---	1.67		2, 3, 4
Contrast Ratio		CR		---	800	---		4, 6
Cross talk		%		---	---	4		4, 7
Response Time		T _{RT}	Rising + Falling	---	25	35	msec	4, 8
Color / Chromaticity Coordinates	Red	R _x	CIE 1931	0.559	0.589	0.619		4
		R _y		0.307	0.337	0.367		
	Green	G _x		0.299	0.329	0.359		
		G _y		0.558	0.588	0.618		
	Blue	B _x		0.126	0.156	0.186		
		B _y		0.098	0.128	0.158		
	White	W _x		0.283	0.313	0.343		
		W _y		0.299	0.329	0.359		
NTSC		%		-	50	-		

Note 1: 5 points position (Ref: Active area)

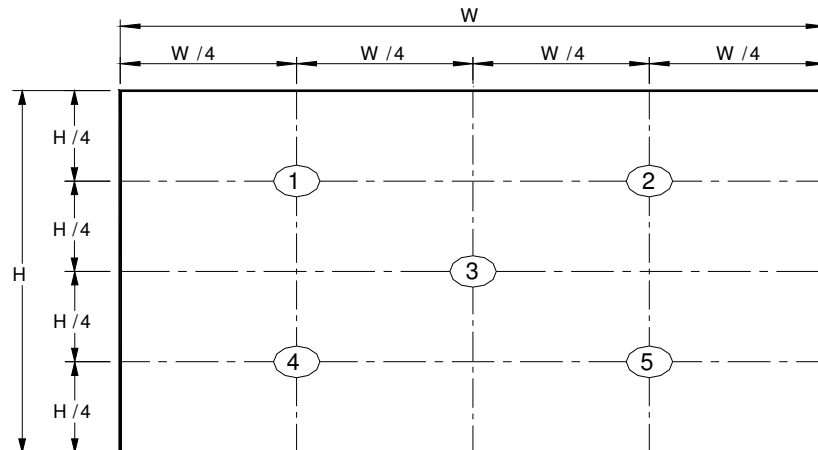

Note 2: 13 points position (Ref: Active area)

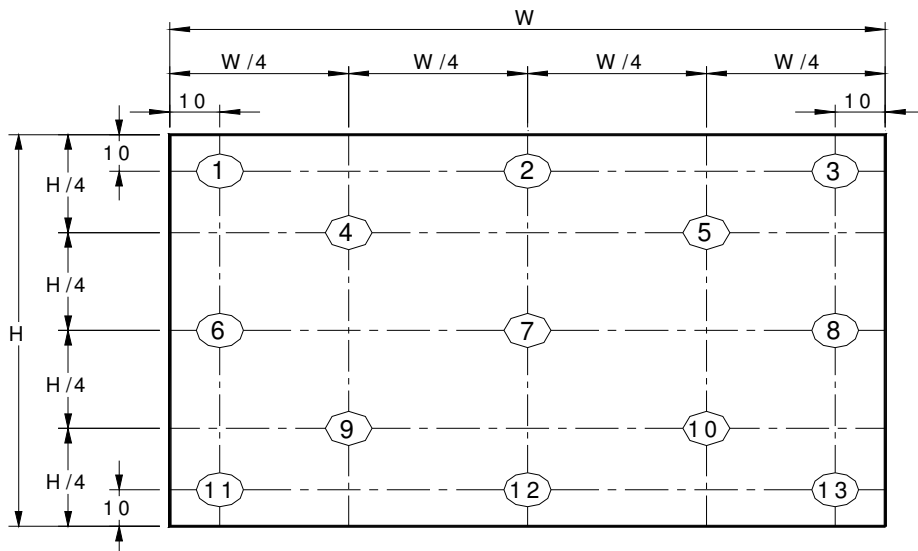

Note 3: The luminance uniformity of 5 or 13 points is defined by dividing the maximum luminance values by the minimum test point luminance


$$\delta_{W5} = \frac{\text{Maximum Brightness of five points}}{\text{Minimum Brightness of five points}}$$

$$\delta_{W13} = \frac{\text{Maximum Brightness of thirteen points}}{\text{Minimum Brightness of thirteen points}}$$

Note 4: Measurement method

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during

measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room, and it should be measured in the center of screen.

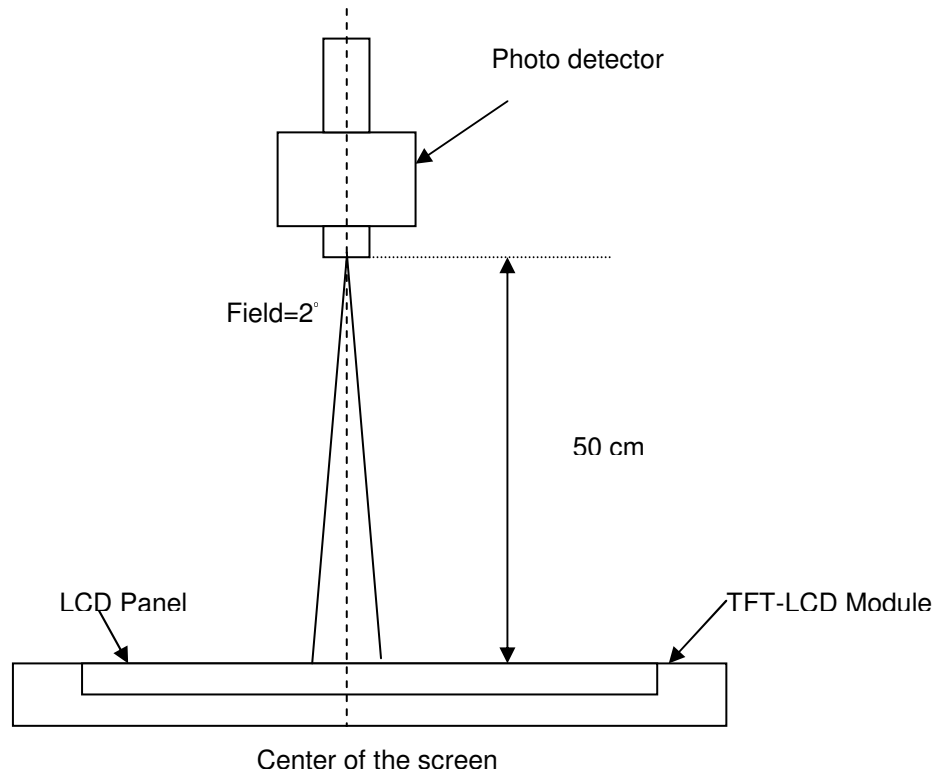

Note 5 : Definition of Average Luminance of White (Y_L):

Measure the luminance of gray level 63 at 5 points , $Y_L = [L(1) + L(2) + L(3) + L(4) + L(5)] / 5$

$L(x)$ is corresponding to the luminance of the point X at Figure in Note (1).

Note 6 : Definition of contrast ratio:

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$


Note 7 : Definition of Cross Talk (CT)

$$CT = |Y_B - Y_A| / Y_A \times 100 (\%)$$

Where


Y_A = Luminance of measured location without gray level 0 pattern (cd/m²)

Y_B = Luminance of measured location with gray level 0 pattern (cd/m²)

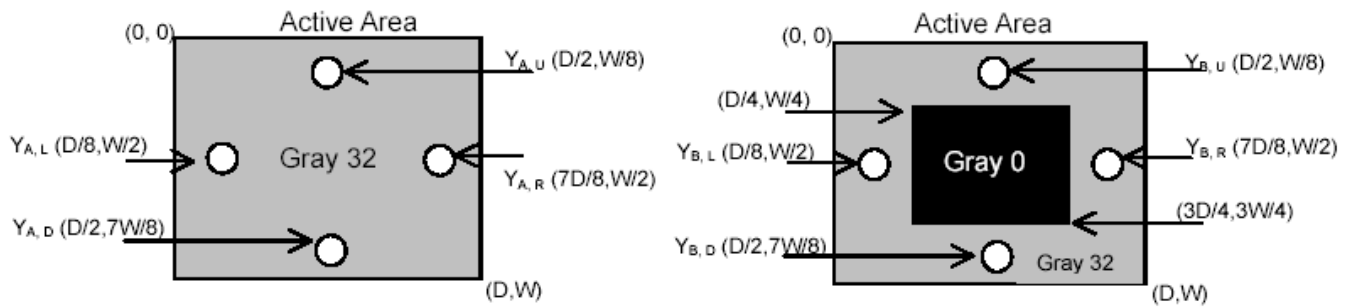

Note 8: Definition of response time:

The output signals of BM-7 or equivalent are measured when the input signals are changed from "Black" to "White" (falling time) and from "White" to "Black" (rising time), respectively. The response time interval between the 10% and 90% of amplitudes. Refer to figure as below.

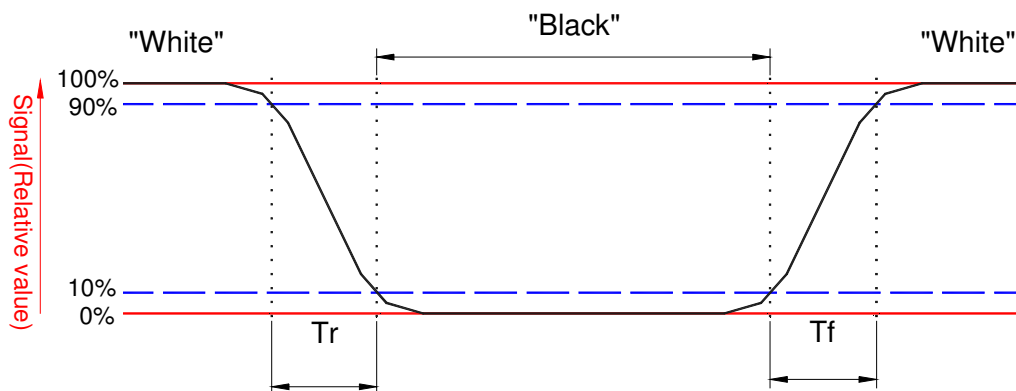


Note 9. Definition of viewing angle

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as follows; 90° (θ) horizontal left and right and 90° (ϕ) vertical, high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated about its center to develop the desired measurement viewing angle.



3. Functional Block Diagram

The following diagram shows the functional block of the 11.6 inches wide Color TFT/LCD 40 Pin one channel Module

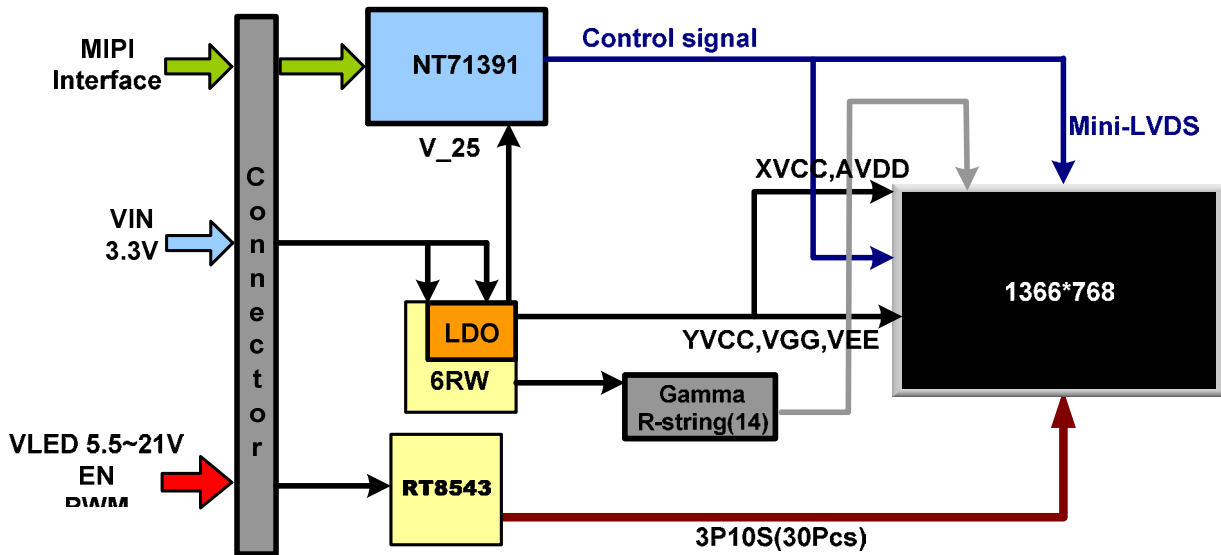

4. Absolute Maximum Ratings

An absolute maximum rating of the module is as following:

4.1 Absolute Ratings of TFT LCD Module

Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	Vin	-0.3	+4.0	[Volt]	Note 1,2

4.3 Absolute Ratings of Environment


Item	Symbol	Min	Max	Unit	Conditions
Operating Temperature	TOP	0	50	[°C]	Note 4
Operation Humidity	HOP	5	95	[%RH]	Note 4
Storage Temperature	TST	-20	+60	[°C]	Note 4
Storage Humidity	HST	5	95	[%RH]	Note 4

Note 1: At Ta (25°C)

Note 2: Permanent damage to the device may occur if exceed maximum values

Note 3: LED specification refer to section 5.2

Note 4: For quality performance, please refer to AUO IIS (Incoming Inspection Standard).

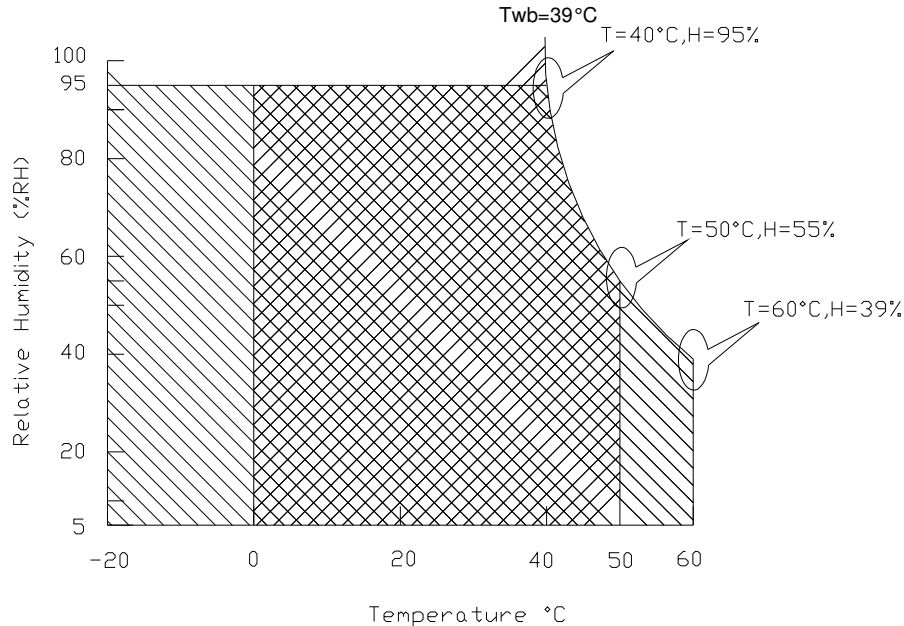

Operating Range



Storage Range




5.1.2 Signal Electrical Characteristics

Input signals shall be low or High-impedance state when VDD is off.


MIPI DC/AC Characteristics are as follows;

MIPI Receiver Differential Input (DC Characteristics)					
Symbol	Parameter	Min	Typ	Max	Unit
BR _{MIPI}	Input data bit rate	200	-	1000	Mbps
V _{CMRX}	Common-mode voltage(HS Rx mode)	70	-	330	mV
V _{IDTH}	Differential input high threshold (HS Rx mode)	-	-	70	mV
V _{IDTL}	Differential input low threshold (HS Rx mode)	-70	-	-	mV
V _{IDM}	Differential input voltage range (HS Rx mode)	70	-	500	mV
V _{IHHS}	Single-end input high voltage (HS Rx mode)	-	-	460	mV
V _{ILHS}	Single-end input low voltage (HS Rx mode)	-40	-	-	mV
Z _{ID}	Differential input impedance	80	100	125	Ω
V _{IHLP}	Logic 1 input voltage (LP Rx mode)	880			mV
V _{ILLP}	Logic 0 input voltage (LP Rx mode)			550	mV
V _{OH}	Output high level (LP Tx mode)	1.08	1.2	1.32	V
V _{OL}	Output low level (LP Tx mode)	-50		50	mV

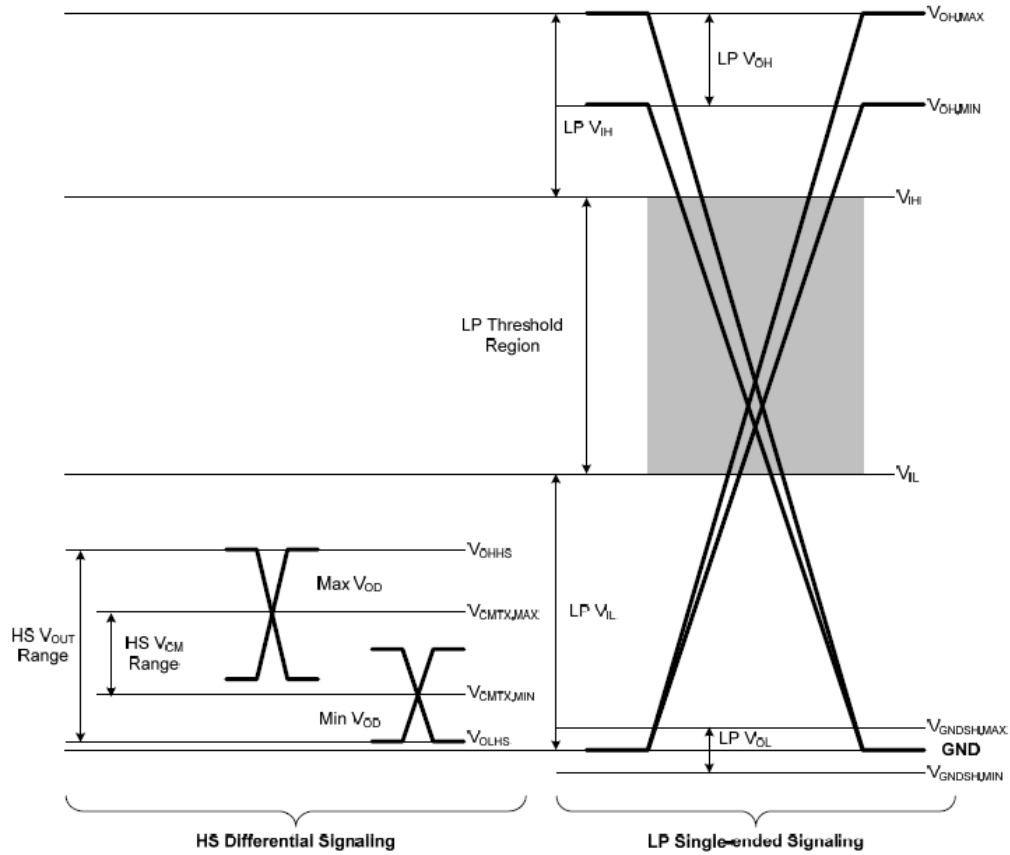

MIPI Receiver Differential Input (AC Characteristics)						
Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$\Delta V_{CMRX(HF)}$	Common-mode interference beyond 450MHz		-	-	100	mV
$\Delta V_{CMRX(LF)}$	Common-mode interference 50MHz ~ 450MHz		-50	-	50	mV
C_{CM}	Common-mode termination		-	-	60	pF
UI_{INST}	UI instantaneous		1		12.5	ns

HS RX Scheme

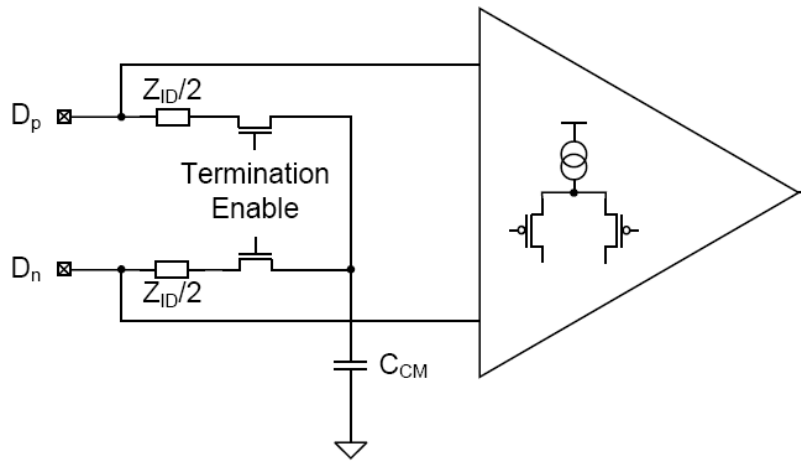


Symbol	Parameter	Min	Typ	Max	Unit	Notes
$T_{\text{SKEW[TX]}}$	Data to Clock Skew (mesured at transmitter)	-0.15		0.15	U_{IINST}	1
$T_{\text{SETUP[RX]}}$	Data to Clock Setup Time (receiver)	0.15			U_{IINST}	2
$T_{\text{HOLD[RX]}}$	Data to Clock Hold Time (receiver)	0.15			U_{IINST}	2

Note:

1. Total silicon and package delay budget of $0.3 \cdot U_{\text{IINST}}$
2. Total setup and hold window for receiver of $0.3 \cdot U_{\text{IINST}}$

High Speed Data Transmission: Data to Clock Timing

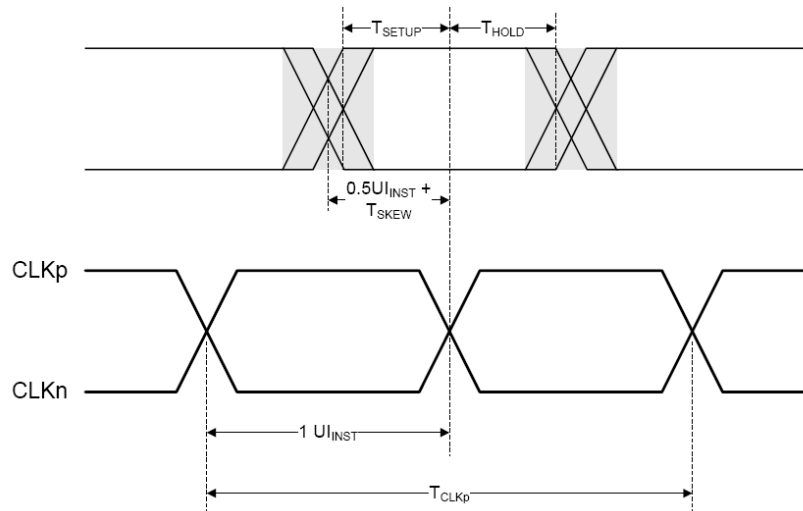

LP Receiver AC Specifications						
Symbol	Parameter	Conditions	Min	Typ	Max	Unit
e_{SPIKE}	Input pulse rejection		-	-	300	$V \cdot ps$
$T_{\text{MIN-RX}}$	Minimum pulse width response		50	-	-	ns




Product Specification


AU OPTRONICS CORPORATION

V_{INT}	Peak interference amplitude		-	-	200	mV
f_{INT}	Interference frequency		450	-	-	MHz

Input Glitch Rejection of Low-Power Receivers

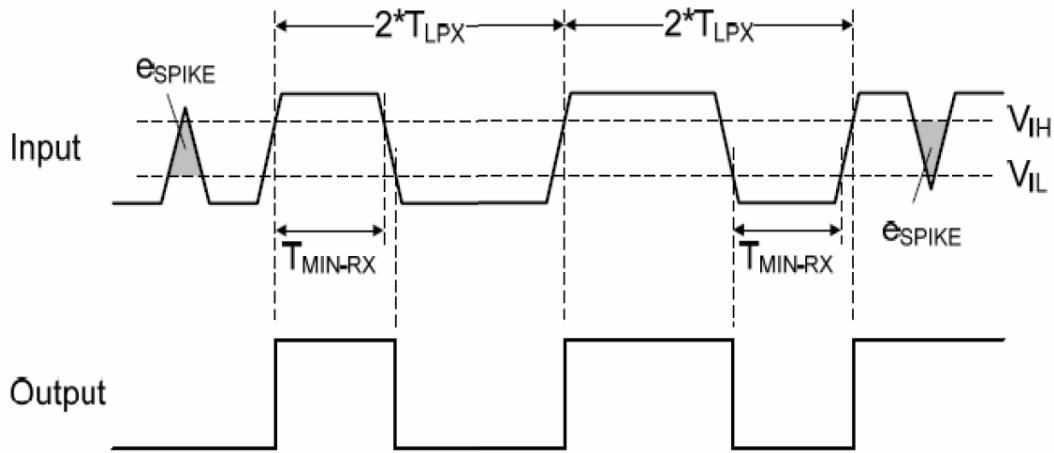

For MIPI data transmission from TX to TCON works properly in video mode, it is suggested that all of MIPI lanes status follow the scheme showed in below. When power is turned on, all lanes (include clock lane) are into LP-11 status first. When TX wants to start transmitting data to TCON, the clock lane is into HS and start toggling. Then data lanes are into HS and data are transmitted. After data transmissions are finished (ex. H-blanking, V-blanking), the data lanes are returned to LP-11, then clock lane, too. The transmission start from LP-11 and stop in LP-11 on all lanes (include clock lane) are the recommended proper operation sequence for MIPI video mode.

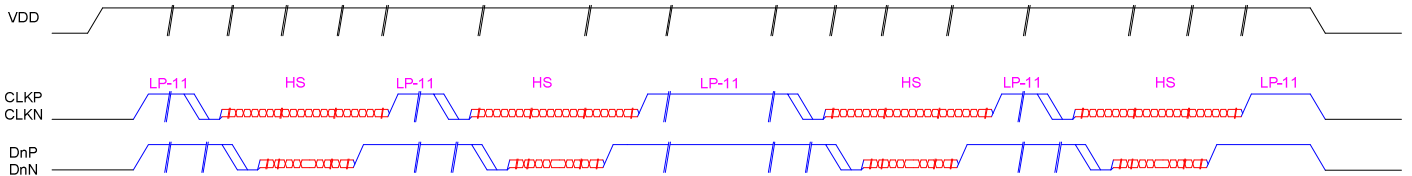

The timing definitions are listed in below,

Parameter	Description	Min	Typ	Max	Unit
TCLK-MISS	Timeout for receiver to detect absence of Clock transitions and disable the Clock Lane HS-RX.			60	ns
TCLK-POST	Time that the transmitter continues to send HS clock after the last associated Data Lane has transitioned to LP Mode. Interval is defined as the period from the end of THS-TRAIL to the beginning of TCLK-TRAIL.	60 ns + 52*UI			ns
TCLK-PRE	Time that the HS clock shall be driven by the transmitter prior to any associated Data Lane beginning the transition from LP to HS mode.	8			UI



Product Specification


AU OPTRONICS CORPORATION

TCLK-PREPARE	Time that the transmitter drives the Clock Lane LP-00 Line state immediately before the HS-0 Line state starting the HS transmission.	38		95	ns
TCLK-SETTLE	Time interval during which the HS receiver shall ignore any Clock Lane HS transitions, starting from the beginning of TCLK-PREPARE.	95		300	ns
TCLK-TERM-EN	Time for the Clock Lane receiver to enable the HS line termination, starting from the time point when Dn crosses VIL,MAX.			38	ns
TCLK-TRAIL	Time that the transmitter drives the HS-0 state after the last payload clock bit of a HS transmission burst.	60			ns
TCLK-PREPARE + TCLK-ZERO	TCLK-PREPARE + time that the transmitter drives the HS-0 state prior to starting the Clock.	300			ns
TD-TERM-EN	Time for the Data Lane receiver to enable the HS line termination, starting from the time point when Dn crosses VIL,MAX.			35 ns + 4*UI	ns
TEOT	Transmitted time interval from the start of THS-TRAIL or TCLK-TRAIL, to the start of the LP-11 state following a HS burst.			105 ns + 12*UI	ns
THS-EXIT	Time that the transmitter drives LP-11 following a HS burst.	100			ns
THS-SYNC	HS Sync-Sequence '00011101' period		8		UI
THS-PREPARE	Time that the transmitter drives the Data Lane LP-00 Line state immediately before the HS-0 Line state starting the HS transmission	40 ns + 4*UI		85 ns + 6*UI	ns
THS-PREPARE + THS-ZERO	THS-PREPARE + time that the transmitter drives the HS-0 state prior to transmitting the Sync sequence.	145 ns + 10*UI			ns
THS-SETTLE	Time interval during which the HS receiver shall ignore any Data Lane HS transitions, starting from the beginning of THS-PREPARE.	85 ns + 6*UI		145 ns + 10*UI	ns
THS-SKIP	Time interval during which the HS-RX should ignore any transitions on the Data Lane, following a HS burst. The end point of the interval is defined as the beginning of the LP-11 state following the HS burst.	40		55 ns + 4*UI	ns
THS-TRAIL	Time that the transmitter drives the flipped differential state after last payload data bit of a HS transmission burst	60 ns + 4*UI			ns
TLPX	Transmitted length of any Low-Power state period	50			ns
Ratio TLPX	Ratio of TLPX(MASTER)/TLPX(SLAVE) between Master and Slave side	2/3		3/2	
TTA-GET	Time that the new transmitter drives the Bridge state (LP-00) after accepting control during a Link Turnaround.		5*TLPX		ns
TTA-GO	Time that the transmitter drives the Bridge state (LP-00) before releasing control during a Link Turnaround.		4*TLPX		ns
TTA-SURE	Time that the new transmitter waits after the LP-10 state before transmitting the Bridge state (LP-00) during a Link Turnaround.	TLPX		2*TLPX	ns


Note:

1. The minimum value depends on the bit rate. Implementations should ensure proper operation for all the supported bit rates.
2. TLPX is an internal state machine timing reference. Externally measured values may differ slightly from the specified values due to asymmetrical rise and fall times.

High-Speed Data Transmission in Bursts

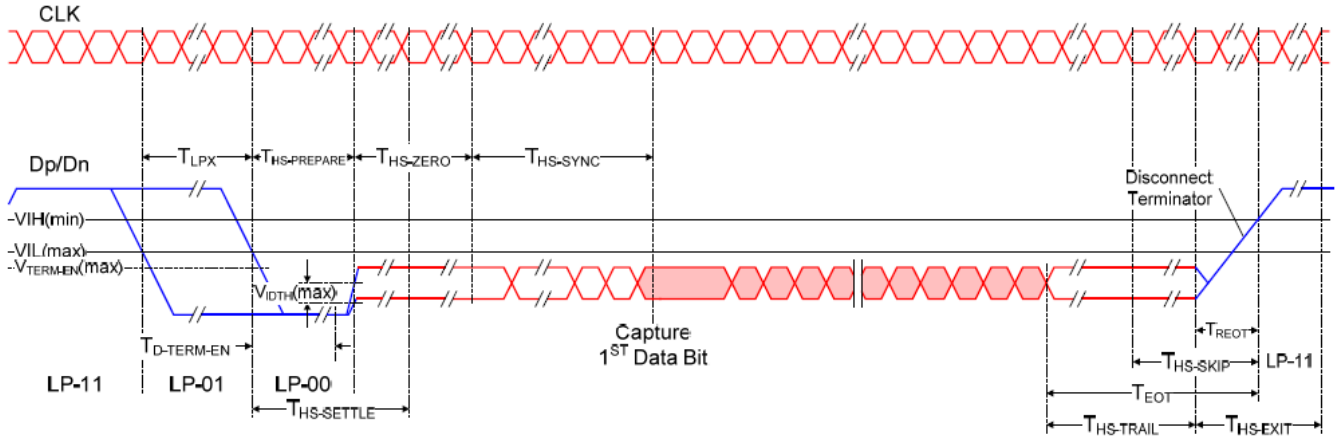

Switching the Clock Lane between Clock Transmission and Low-Power Mode

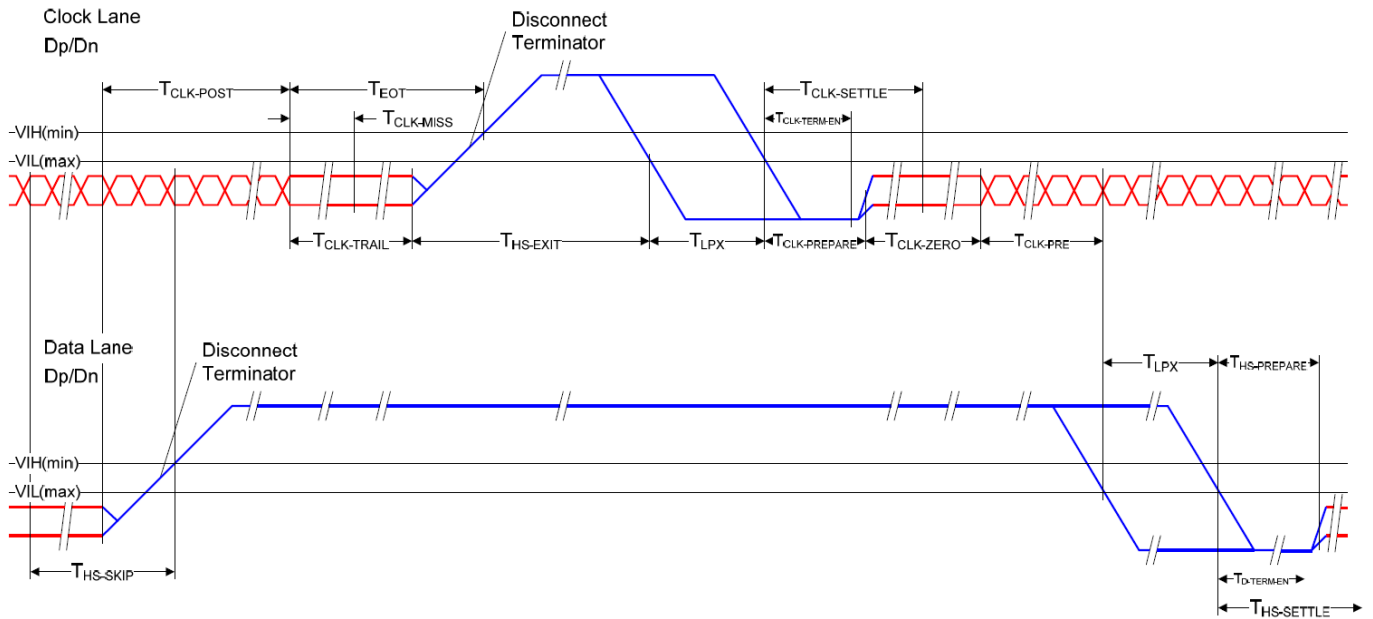

Turnaround Procedure



5.2 Backlight Unit

5.2.1 LED characteristics

Parameter	Symbol	Min	Typ	Max	Units	Condition
Backlight Power Consumption	PLED	-	-	2.31	[Watt]	(Ta=25°C @400nits)
LED Life-Time	N/A	10,000	-	-	Hour	(Ta=25°C @400nit) Note1.
LED Forward Voltage	VF	2.8	3.0	3.3	[Volt]	(Ta=25°C)
LED Forward Voltage of every LED string	VF-string	-	30	33	[Volt]	(Ta=25°C) Note2.
LED Forward Current	IF	-	20	-	[mA]	(Ta=25°C)

Note 1. The LED life-time define as the estimated time to 50% degradation of initial luminous.

Note 2. Every LED string consists of 10 pcs LED chip

Note 3. LED input Current 0.424A max / LED Forward Current 20mA per string, total 60mA / LED Forward Voltage 33V typ / LED Array 3parallel * 10series

Note 4. LED driver IC Vender - Richtek


6.1 Pixel Format Image

	1										1366											
1st Line	R	G	B	R	G	B										R	G	B	R	G	B

768th Line	R	G	B	R	G	B										R	G	B	R	G	B

6.2 The Input Data Format

Input Pixel Stream Format (1366RGB in 4 Lanes with RGB 8-8-8 format)

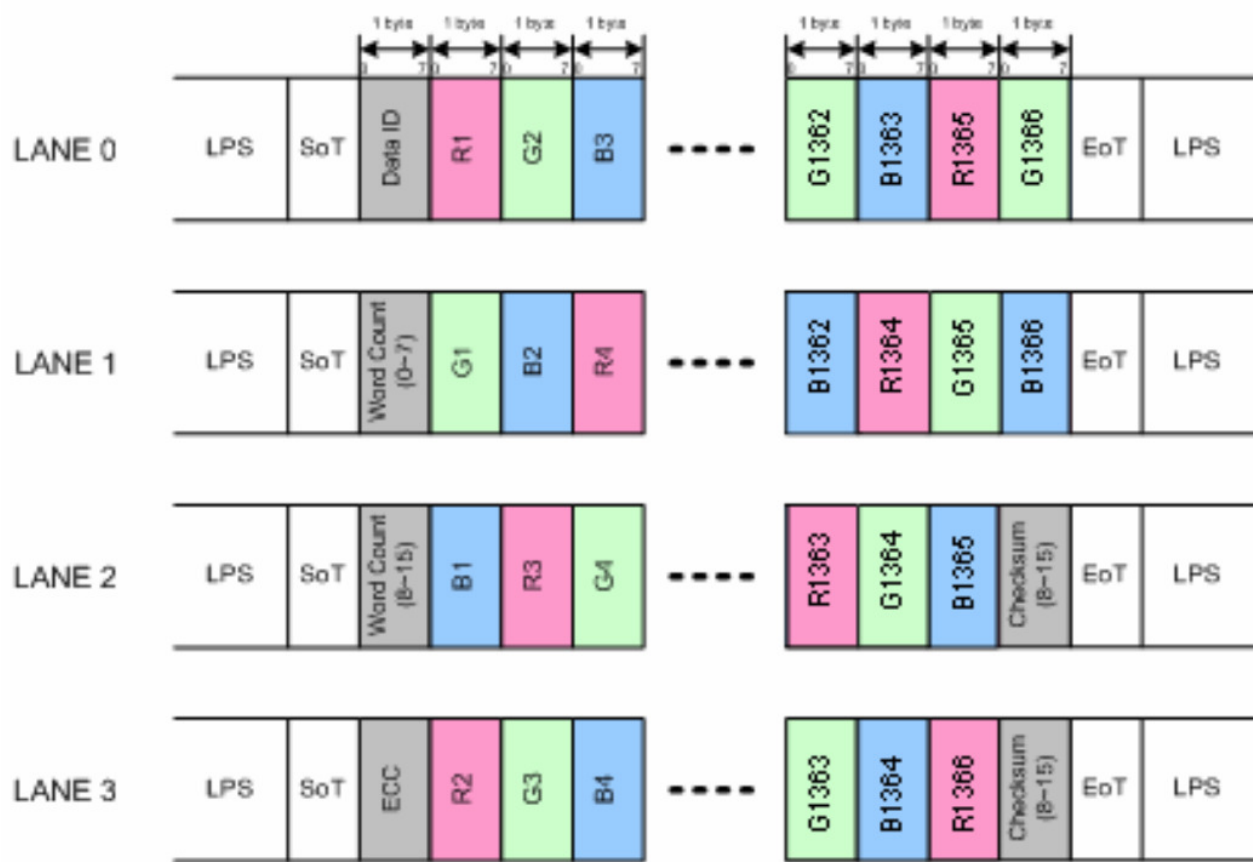

LPS : Low Power State
SoT : Start of Transmission
EoT : End of Transmission
ECC : Error-Correcting Code

6.3 Integration Interface Requirement

6.3.1 MIPI Connector Description

Physical interface is described as for the connector on module.

These connectors are capable of accommodating the following signals and will be following components.

Connector Name / Designation	For Signal Connector
Manufacturer	DDK
Type / Part Number	FF12-40A-R12BN-D3
Mating Housing/Part Number	FPC Cable

6.3.2 MIPI Pin Assignment

MIPI is a differential signal technology for LCD interface and high speed data transfer device.

No.	Pin Name	I/O	Power Rail	Description
1	VDD	P	VDD	Power Supply +3.3V
2	VDD	P	VDD	Power Supply +3.3V
3	VDD	P	VDD	Power Supply +3.3V
4	NC	--	--	Not Connection
5	SDA	I/O	IOVDD	EDID Data Input
6	SCL	I/O	IOVDD	EDID Clock Input
7	GND	G	GND	Ground
8	GND	G	GND	Ground
9	NC	--	--	Not Connection
10	LEDPWM	I	IOVDD	Backlight LED driver PWM Input
11	LED_EN	I	IOVDD	LED Enable Input
12	NC	--	--	Not Connection
13	BIST	I	--	LCD Panel Self Test Enable
14	NC	--	--	Not Connection
15	GND	G	GND	MDDI data positive signal
16	DSI_D2P/Rx-IN2P	I	MIPI	MIPI data pair 2 positive signal
17	DSI_D2N/Rx-IN2N	I	MIPI	MIPI data pair 2 negative signal
18	GND	G	GND	Ground
19	DSI_D1P/Rx-IN1P	I	MIPI	MIPI data pair 1 positive signal
20	DSI_D1N/Rx-IN1N	I	MIPI	MIPI data pair 1 negative signal
21	GND	G	GND	Ground
22	DSI_CLKP/Rx-CLKP	I	MIPI	MIPI Clock positive signal
23	DSI_CLKN/Rx-CLKN	I	MIPI	MIPI Clock negative signal
24	GND	G	GND	Ground

25	DSI_D0P/Rx-IN0P	I/O	MIPI	MIPI data pair 0 positive signal
26	DSI_D0N/Rx-IN0N	I/O	MIPI	MIPI data pair 0 negative signal
27	GND	G	GND	Ground
28	DSI_D3P/Rx-IN3P	I	MIPI	MIPI data pair 3 positive signal
29	DSI_D3NRx-IN3N	I	MIPI	MIPI data pair 3 negative signal
30	GND	G	GND	Ground
31	NC	--	--	Not Connection
32	LED-	G	--	LED Ground
33	LED-	G	--	LED Ground
34	LED-	G	--	LED Ground
35	LED-	G	--	LED Ground
36	NC	--	--	Not Connection
37	LED+	P	--	LED Power Supply
38	LED+	P	--	LED Power Supply
39	LED+	P	--	LED Power Supply
40	LED+	P	--	LED Power Supply

6.4 MIPI Interface Timing

6.4.1 Timing Characteristics


Basically, interface timings should match the 1366x768 /60Hz manufacturing guide line timing.

Parameter		Symbol	Min.	Typ.	Max.	Unit
Frame Rate		---	---	60	---	Hz
Clock frequency		1/ T _{Clock}	67.3	70.7	80.5	MHz
Vertical Section	Period	T _V	784	790	862	T _{Line}
	Active	T _{VD}	768			
	Blanking	T _{VB}	16	22	94	
Horizontal Section	Period	T _H	1430	1490	1557	T _{Clock}
	Active	T _{HD}	1366			
	Blanking	T _{HB}	64	124	191	

Note : 1. DE mode only


2. Clock frequency number is for reference, real setting value refer to EDID (Clock frequency 70.7MHz)

6.4.2 Timing diagram

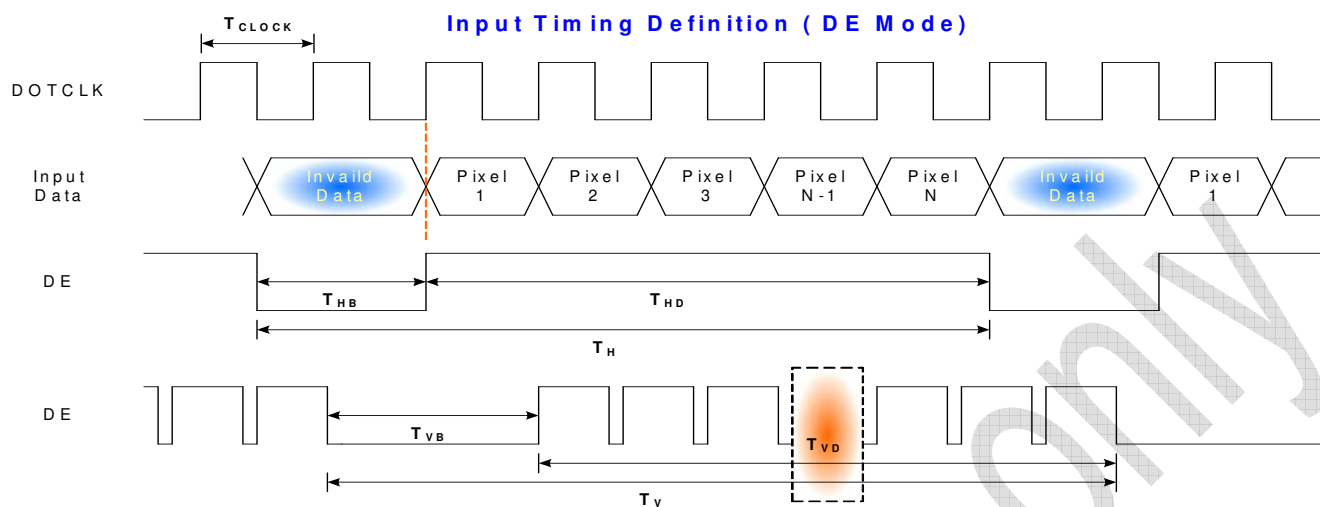

6.5 Power ON/OFF Sequence

Power on/off sequence is as follows. Interface signals and LED on/off sequence are also shown in the chart.

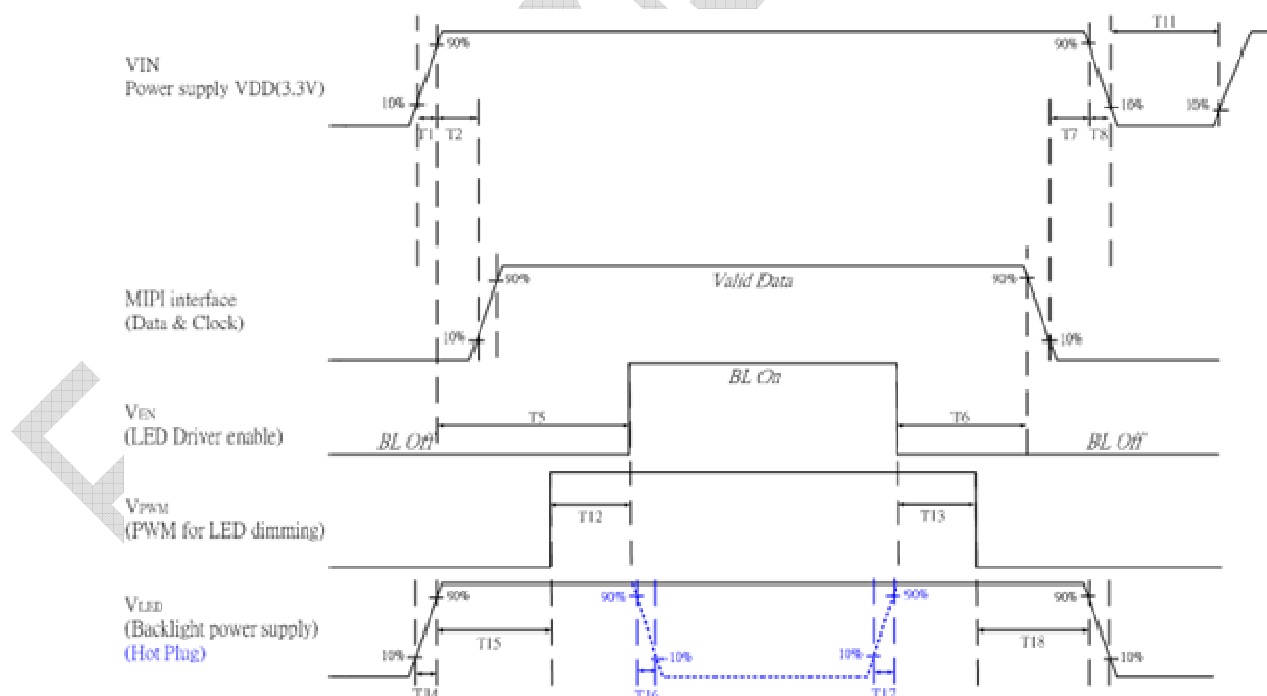

Power Sequence Timing			
Parameter	Value		Units
	Min.	Max.	
T1	0.5	10	ms
T2	0	50	
T5	200	-	
T6	200	-	
T7	0	50	
T8	0	10	
T11	500	-	
T12	10	-	
T13	10	-	
T14	0.5	10	
T15	10	-	
T16	1*	-	
T17	1*	-	
T18	10	-	

Note : T12,T13,T15 value are recommended, T12,T13,T15 ≥ 0 could be acceptable

7. Panel Reliability Test

7.1 Vibration Test

Test Spec:

- Test method: Non-Operation
- Acceleration: 1.5 G
- Frequency: 10 - 500Hz Random
- Sweep: 30 Minutes each Axis (X, Y, Z)

7.2 Shock Test

Test Spec:

- Test method: Non-Operation
- Acceleration: 220 G , Half sine wave
- Active time: 2 ms
- Pulse: X,Y,Z .one time for each side

7.3 Reliability Test

Items	Required Condition	Note
Temperature Humidity Bias	Ta= 40°C , 90%RH, 300h	
High Temperature Operation	Ta= 50°C , Dry, 300h	
Low Temperature Operation	Ta= 0°C , 300h	
High Temperature Storage	Ta= 60°C , 300h	
Low Temperature Storage	Ta= -20°C , 300h	
Thermal Shock Test	Ta=-20°C to 60°C , Duration at 30 min, 100 cycles	
ESD	Contact : ±8 KV Air : ±15 KV	Note 1


Note1: According to EN 61000-4-2 , ESD class B: Some performance degradation allowed. No data lost
Self-recoverable. No hardware failures.

Remark: MTBF (Excluding the LED): 30,000 hours with a confidence level 90%


8. Mechanical Characteristics

8.1 LCM Outline Dimension

8.1.1 Standard Front View

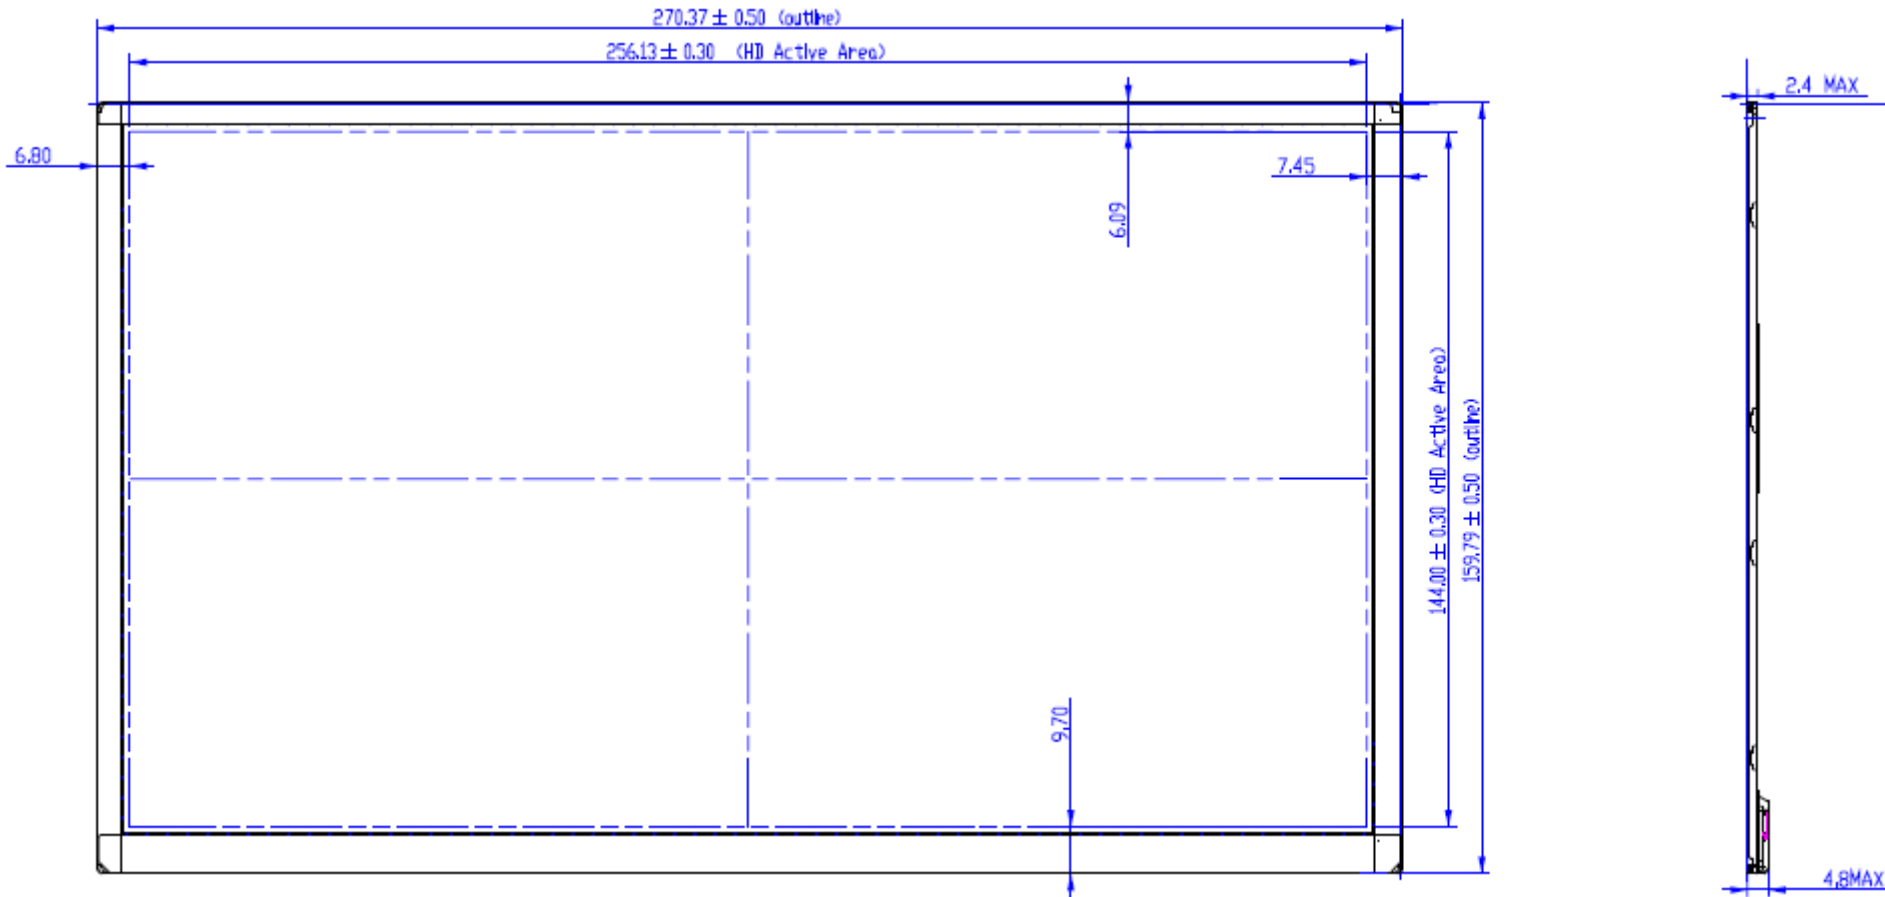

8.1.2 Standard Rear View

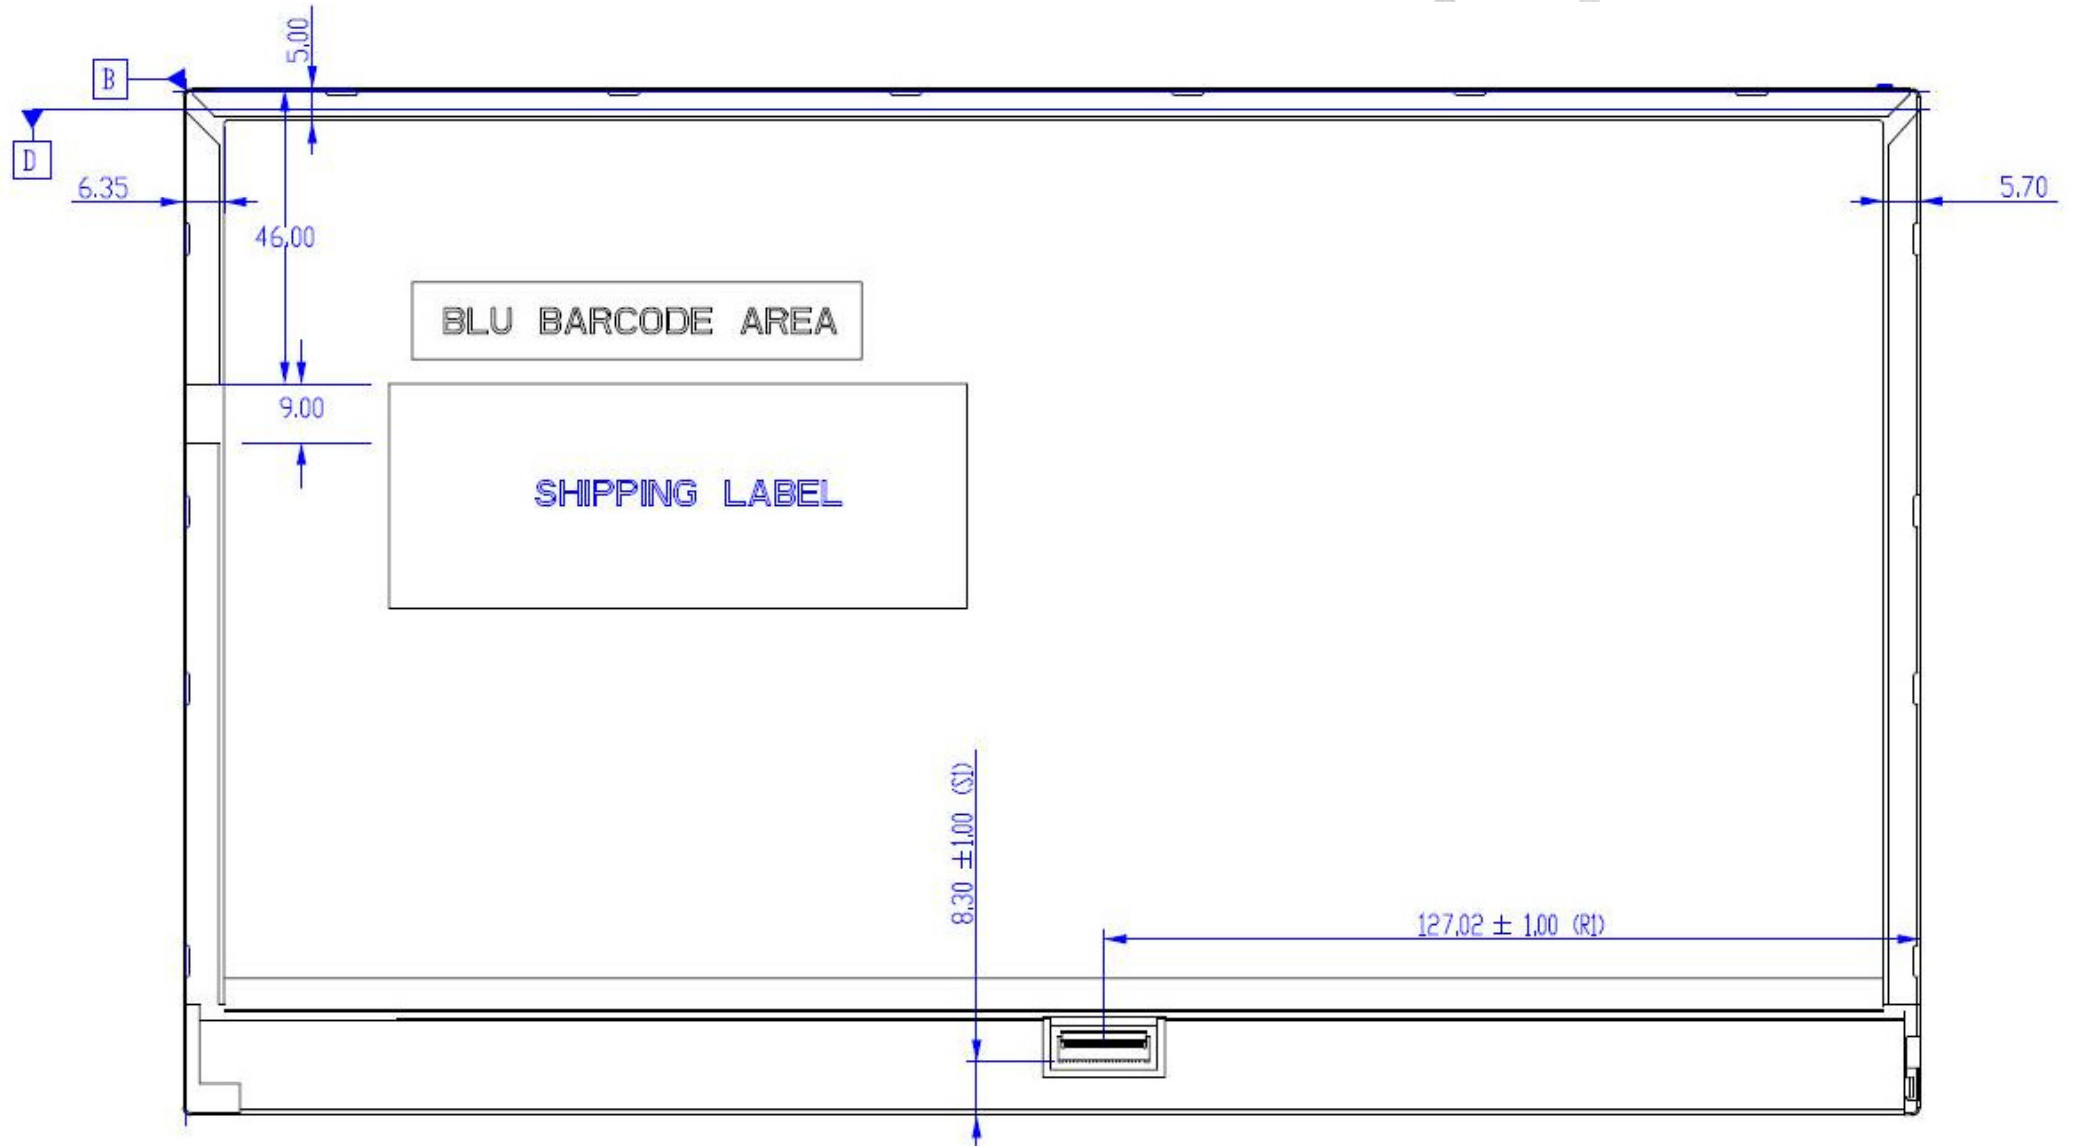


9. Shipping and Package

9.1 Shipping Label Format



Shipping label




Carton Label

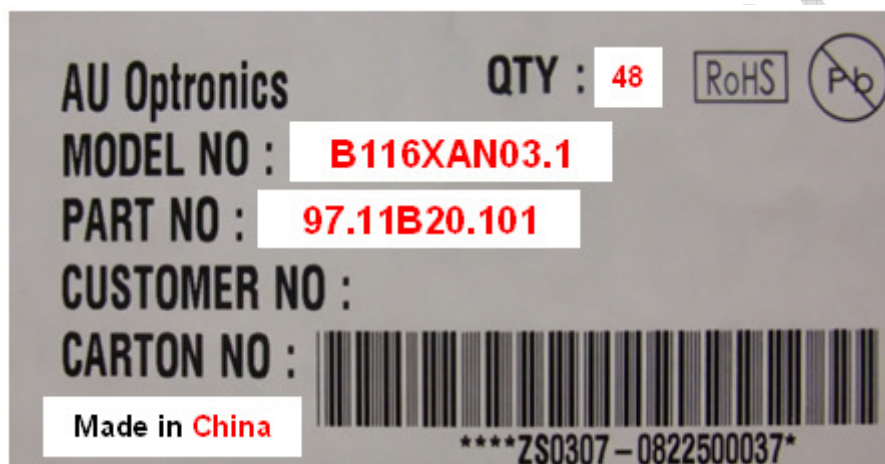

9.2 Carton Package



9.3 Shipping Package of Palletizing Sequence

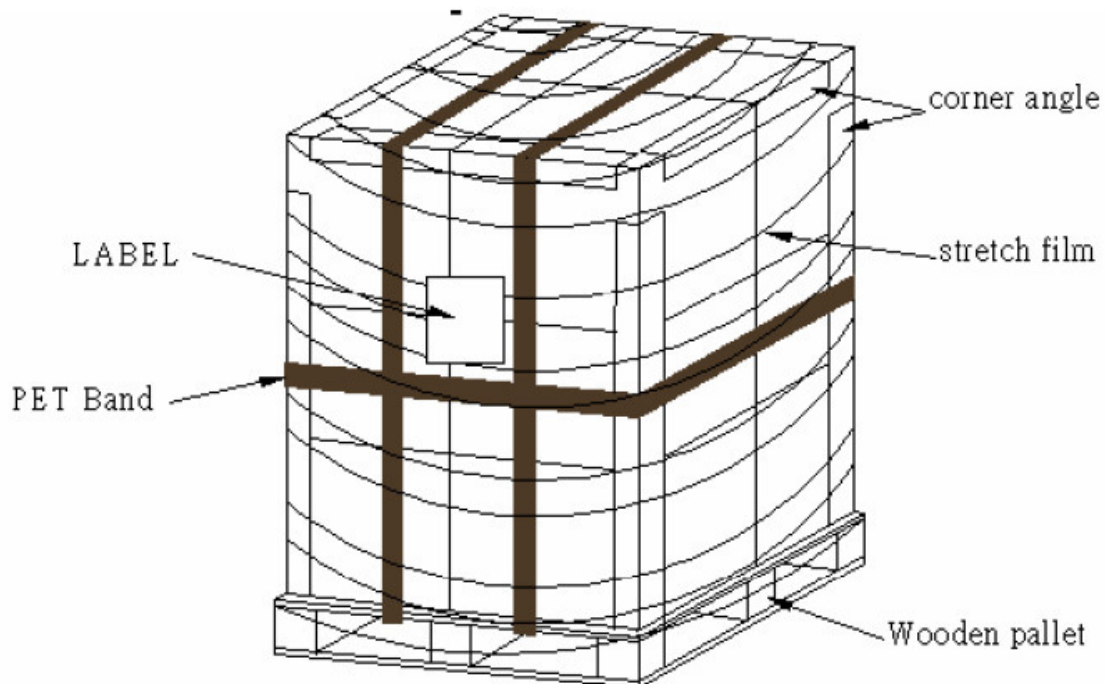

10. Appendix

10.1 EDID Description

Address	FUNCTION	Value	Value	Value
HEX		HEX	BIN	DEC
00	Header	00	00000000	0
01		FF	11111111	255
02		FF	11111111	255
03		FF	11111111	255
04		FF	11111111	255
05		FF	11111111	255
06		FF	11111111	255
07		00	00000000	0
08	EISA Manuf. Code LSB	06	00000110	6
09	Compressed ASCII	AF	10101111	175
0A	Product Code	5C	01011100	92
0B	hex, LSB first	31	00110001	49
0C	32-bit ser #	00	00000000	0
0D		00	00000000	0
0E		00	00000000	0
0F		00	00000000	0
10	Week of manufacture	00	00000000	0
11	Year of manufacture	16	00010110	22
12	EDID Structure Ver.	01	00000001	1
13	EDID revision #	04	00000100	4
14	Video input def. <i>(digital I/P, non-TMDS, CRGB)</i>	A0	10100000	160
15	Max H image size <i>(rounded to cm)</i>	1A	00011010	26
16	Max V image size <i>(rounded to cm)</i>	0E	00001110	14
17	Display Gamma <i>(=(gamma*100)-100)</i>	78	01111000	120
18	Feature support <i>(no DPMS, Active OFF, RGB, tmg Blk#1)</i>	02	00000010	2
19	Red/green low bits (Lower 2:2:2:2 bits)	D6	11010110	214
1A	Blue/white low bits (Lower 2:2:2:2 bits)	35	00110101	53
1B	Red x (Upper 8 bits)	96	10010110	150
1C	Red y/ highER 8 bits	56	01010110	86
1D	Green x	54	01010100	84
1E	Green y	96	10010110	150
1F	Blue x	28	00101000	40
20	Blue y	20	00100000	32
21	White x	50	01010000	80
22	White y	54	01010100	84
23	Established timing 1	00	00000000	0
24	Established timing 2	00	00000000	0
25	Established timing 3	00	00000000	0
26	Standard timing #1	01	00000001	1
27		01	00000001	1
28	Standard timing #2	01	00000001	1
29		01	00000001	1
2A	Standard timing #3	01	00000001	1
2B		01	00000001	1

2C	Standard timing #4	01	00000001	1
2D		01	00000001	1
2E	Standard timing #5	01	00000001	1
2F		01	00000001	1
30	Standard timing #6	01	00000001	1
31		01	00000001	1
32	Standard timing #7	01	00000001	1
33		01	00000001	1
34	Standard timing #8	01	00000001	1
35		01	00000001	1
36	Pixel Clock/10000 LSB	9E	10011110	158
37	Pixel Clock/10000 USB	1B	00011011	27
38	Horz active Lower 8bits	56	01010110	86
39	Horz blanking Lower 8bits	7C	01111100	124
3A	HorzAct:HorzBlnk Upper 4:4 bits	50	01010000	80
3B	Vertical Active Lower 8bits	00	00000000	0
3C	Vertical Blanking Lower 8bits	16	00010110	22
3D	Vert Act : Vertical Blanking (upper 4:4 bit)	30	00110000	48
3E	HorzSync. Offset	30	00110000	48
3F	HorzSync.Width	20	00100000	32
40	VertSync.Offset : VertSync.Width	46	01000110	70
41	Horz&Vert Sync Offset/Width Upper 2bits	00	00000000	0
42	Horizontal Image Size Lower 8bits	00	00000000	0
43	Vertical Image Size Lower 8bits	90	10010000	144
44	Horizontal & Vertical Image Size (upper 4:4 bits)	10	00010000	16
45	Horizontal Border <i>(zero for internal LCD)</i>	00	00000000	0
46	Vertical Border <i>(zero for internal LCD)</i>	00	00000000	0
47	Signal <i>(non-intr, norm, no stero, sep sync, neg pol)</i>	18	00011000	24
48	Detailed timing/monitor	00	00000000	0
49	descriptor #2	00	00000000	0
4A		00	00000000	0
4B		0F	00001111	15
4C		00	00000000	0
4D		00	00000000	0
4E		00	00000000	0
4F		00	00000000	0
50		00	00000000	0
51		00	00000000	0
52		00	00000000	0
53		00	00000000	0
54		00	00000000	0
55		00	00000000	0
56		00	00000000	0
57		00	00000000	0
58		00	00000000	0
59		20	00100000	32
5A	Detailed timing/monitor	00	00000000	0
5B	descriptor #3	00	00000000	0
5C		00	00000000	0

5D		FE	11111110	254
5E		00	00000000	0
5F	Manufacture	41	01000001	65
60	Manufacture	55	01010101	85
61	Manufacture	4F	01001111	79
62		0A	00001010	10
63		20	00100000	32
64		20	00100000	32
65		20	00100000	32
66		20	00100000	32
67		20	00100000	32
68		20	00100000	32
69		20	00100000	32
6A		20	00100000	32
6B		20	00100000	32
6C	Detailed timing/monitor	00	00000000	0
6D	descriptor #4	00	00000000	0
6E		00	00000000	0
6F		FE	11111110	254
70		00	00000000	0
71	Manufacture P/N	42	01000010	66
72	Manufacture P/N	31	00110001	49
73	Manufacture P/N	31	00110001	49
74	Manufacture P/N	36	00110110	54
75	Manufacture P/N	58	01011000	88
76	Manufacture P/N	41	01000001	65
77	Manufacture P/N	4E	01001110	78
78	Manufacture P/N	30	00110000	48
79	Manufacture P/N	33	00110011	51
7A	Manufacture P/N	2E	00101110	46
7B	Manufacture P/N	31	00110001	49
7C		20	00100000	32
7D		0A	00001010	10
7E	Extension Flag	00	00000000	0
7F	Checksum	34	00110100	52