

Yan Xian (Shenzhen) Technology Limited	Confidential: Level 2
	Page: 1/19
Product Specification	Doc No:
	Ver No:



AMOLED

Product Specification

Model Name: E295FCA62.A

Description: 2.95" 1080RGB x 1200 AMOLED

Version: 1.2

Customer: Standard

- ☒ Approved for Preliminary Specification
- ☐ Approved for Final Specification
- ☐ Approved for Final Specification & Sample

Prepared	Checked	Approved

Customer's Approval

Yan Xian (Shenzhen) Technology Limited	Confidential: Level 2
	Page: 3/19
	Doc No:
	Ver No:
Product Specification	

Contents

Contents	3
1 Scope	4
2 Features	4
2.1 Product Applications	4
2.2 Product Features	4
3 Maximum Rating	5
4 Mechanical Specifications	5
5 Electrical Specifications	5
5.1 Electrical Characteristics	5
5.1.1 Power Characteristic:	5
5.1.2 Power supply circuit application (This is for reference only):	6
6 Electro-Optical Specification	6~8
7 I/O Connection and Block Diagrams	8
7.1 1I/O Connection	8~9
7.2 Display Module Block Diagram	9
8 Recommended Operating Sequence	10
8.1 AC Characteristics (MIPI)	11
8.1.1 HS Data Transmission Burst	11
8.1.2 HS Clock Transmission	11
8.1.3 Turnaround Procedure	11
8.1.4 Timing Parameters	132
8.1.5 Timing requirements for RESETB	14
8.2 Scan Direction	15
9 Reliability	15
9.1 Environmental Test	15
9.2 Electrical Test	15
10 Handling Precautions	17
11 Outline Dimension Drawing	16
12 Packing Specification	17~17
13 The Control of Hazardous substances	17

Yan Xian (Shenzhen) Technology Limited	Confidential: Level 2
	Page: 4/19
Product Specification	Doc No:
	Ver No:

1 Scope

This Specification defines AMOLED manufactured by EverDisplay Optonics (Shanghai) Limited, from here on refer as EDO. In the case of any unspecified item, it may require both EDO and the party designs this module into its product to work out a solution.

2 Features

2.1 Product Applications

Consumer Electronics

2.2 Product Features

- 1) Display color: 16.7M (RGB x 8bits)
- 2) Display format: 2.95" 1080 x 1200
- 3) Pixel arrangement: Sub Pixel Rendering
- 4) Interface: MIPI 4 lanes
- 5) Driver IC: RM 67295
- 6) Frequency: 60 Hz

3 Maximum Rating

Parameter	Symbol	Spec			Unit	Note
		Min.	Typ.	Max.		
Analog/boost power voltage	VCI	-0.3	-	5.5	V	—
VCI I/O voltage	VCI_IF	-0.3	-	5.5	V	—
I/O voltage	VDDI	-0.3	-	5.5	V	—
VSP voltage	VSP	-0.3	-	6.6	V	—
VPP(OTP power)	VPP(NC)	-	-	8.25	V	—
Operating temperature	Top	-40		85	°C	
Storage temperature	Tstg	-55		125	°C	

Product Specification	Yan Xian (Shenzhen) Technology Limited	Confidential: Level 2
		Page: 5/19
		Doc No:
		Ver No:

4 Mechanical Specifications

Item	Specification	unit
Dimension outline	52.91 x 62.58 x 0.65 (Including Cushion)	mm
LTPS Glass outline	52.91 x 62.58	mm
Encapsulation Glass outline	52.91 x 59.58	mm
Resolution	1080(W) x 1200(H)	
Active area	50.11 x 55.68	mm
Diagonal size	2.95	inch
Pixel pitch	23.2 x 46.4	μm
Glass thickness (LTPS/encapsulation glass)	0.2 / 0.2	mm
Weight	4.8 (±10%)	g

Note: Refer to 9 Outline Dimension Drawing

5 Electrical Specifications

5.1 Electrical Characteristics

5.1.1 Power Characteristic:

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
AMOLED Power positive	ELVDD	-	4.6	-	V	
AMOLED power Negative	ELVSS	-	-2.5	-	V	Ref
Gamma Voltage	VSP	6.1	6.4	6.5	V	Ref
Digital Power supply	VDDI	1.65	1.8	3.6	V	Ref
Analog Power supply	VCI	2.5	3.3	4.8	V	Ref

Mode	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
@ Gray 255	IELVDD / IELVSS	VELVDD = 4.6V		45	55	mA	Ref
	IVCI	VELVSS = -2.5V		1.5	1.8	mA	Ref
	IVDDIO	VCI = 3.3V		30	40	mA	Ref
	IVSP	VDDIO = 1.8V VSP = 6.4		12	15	mA	Ref

Yan Xian (Shenzhen) Technology Limited	Confidential: Level 2
	Page: 7/19
	Doc No:
	Ver No:
Product Specification	


Note1: Temp.25℃，（Angle、distance）

Environmental conditions: Temp.25℃±3℃，65±20%RH，Dark Room。

Distance of OLED display center to measuring machine is 50cm。

Note2: Brightness, Brightness Uniformity and Contrast Ratio definition

Measure 5 points of Display Brightness. P1~P5.

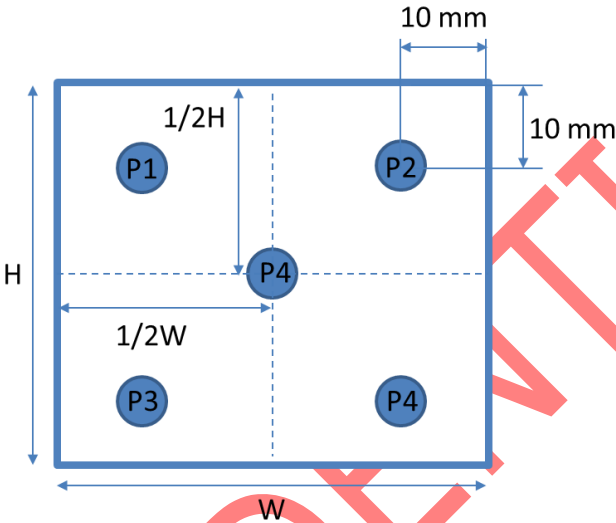


- 1) Brightness definition


$$\text{Luminance} = [P1 + P2 + P3 + P4 + P5] / 5$$
 - 2) Brightness Uniformity definition

$$\text{Brightness Uniformity} = Y(\text{min}) / Y(\text{max})$$
 - 3) Contrast Ratio definition

$$\text{Dark Room C.R} = \text{Luminance (White)} / \text{Luminance (Black)}$$
- Note3: Cross-talk
- 4% black or white window ， 117 gray background.

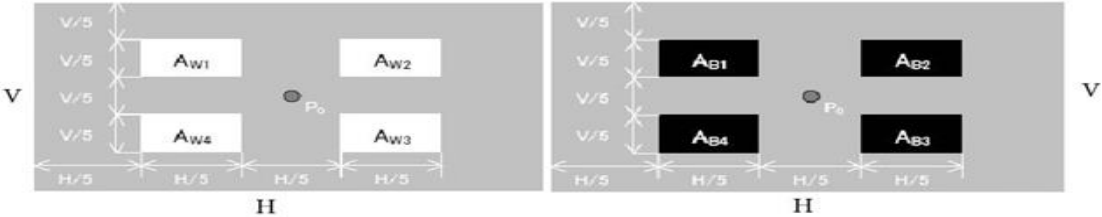

Yan Xian (Shenzhen) Technology Limited Product Specification	Confidential: Level 2
	Page: 8/19
	Doc No:
	Ver No:

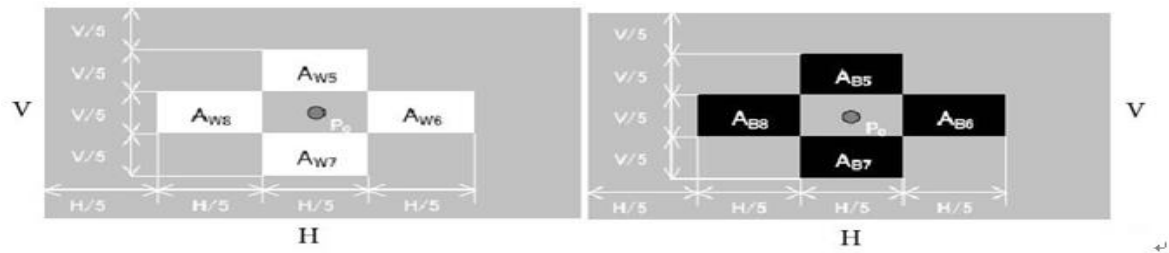

$$L_{W_OFF} = \frac{L_{W1} + L_{W2} + L_{W3} + L_{W4}}{4} \quad L_{B_OFF} = \frac{L_{B1} + L_{B2} + L_{B3} + L_{B4}}{4}$$

For white windows A_{Wi} ($i = 5$ to 8), and

$$CT = \frac{|L_{Wi_ON} - L_{W_OFF}|}{L_{W_OFF}} \times 100\% (i = 5 \text{ to } 8)$$

For black windows A_{Bi} ($i = 5$ to 8).

$$CT = \frac{|L_{Bi_ON} - L_{B_OFF}|}{L_{B_OFF}} \times 100\% (i = 5 \text{ to } 8)$$

The maximum cross-talk value shall be noted in the measurement report.

Note4: Response Time

Response time=Pixel turn on and turn off time (White<=>Black).

It is measuring transition time from 10% to 90% of luminance.

7 I/O Connection and Block Diagrams

7.1I/O Connection


#	Pin Name	I/O	Description
1	ELVSS	Power	AMOLED power Negative
2	ELVSS	Power	AMOLED power Negative
3	ELVSS	Power	AMOLED power Negative
4	ELVDD	Power	AMOLED power Positive
5	ELVDD	Power	AMOLED power Positive
6	ELVDD	Power	AMOLED power Positive
7	GND	Gnd	The power ground
8	D2N	I	MIPI DSI data2-
9	D2P	I	MIPI DSI data2+

Yan Xian (Shenzhen) Technology Limited	Confidential: Level 2
	Page: 9/19
	Doc No:
	Ver No:
Product Specification	


10	GND	Gnd	The power ground
11	D0N	I/O	MIPI DSI data0-
12	D0P	I/O	MIPI DSI data0+
13	GND	Gnd	The power ground
14	CLKN	I	MIPI DSI clock-
15	CLKP	I	MIPI DSI clock+
16	GND	Gnd	The power ground
17	D1N	I	MIPI DSI data1-
18	D1P	I	MIPI DSI data1+
19	GND	Gnd	The power ground
20	D3N	I	MIPI DSI data3-
21	D3P	I	MIPI DSI data3+
22	GND	Gnd	The power ground
23	VDDIO	Power	Driver IC digital I/O supply
24	VDDIO	Power	Driver IC digital I/O supply
25	VCI	Power	Driver IC analog supply
26	VCI	Power	Driver IC analog supply
27	RESX	I	This signal will reset the device and must be applied to properly initialize the chip. Active low.
28	SWIRE	O	Power IC control pin
29	OLED_EN	O	Power IC enable
30	MTP	Power	Power supply for OTP. Leave the pin to open when not in use.
31	GND	Gnd	The power ground
32	VSP	Power	Power supply for Analog system
33	VSP	Power	Power supply for Analog system
34	ELVDD	Power	AMOLED power Positive
35	ELVDD	Power	AMOLED power Positive
36	ELVDD	Power	AMOLED power Positive
37	ELVSS	Power	AMOLED power Negative
38	ELVSS	Power	AMOLED power Negative
39	ELVSS	Power	AMOLED power Negative

Yan Xian (Shenzhen) Technology Limited	Confidential: Level 2
	Page: 10/19
Product Specification	Doc No:
	Ver No:


7.2Display Module Block Diagram

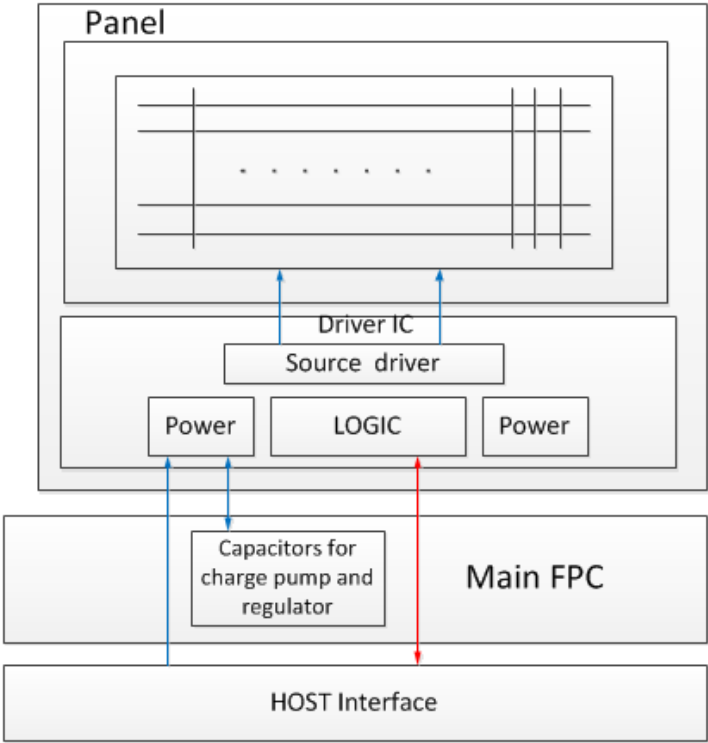

8 Recommended Operating Sequence

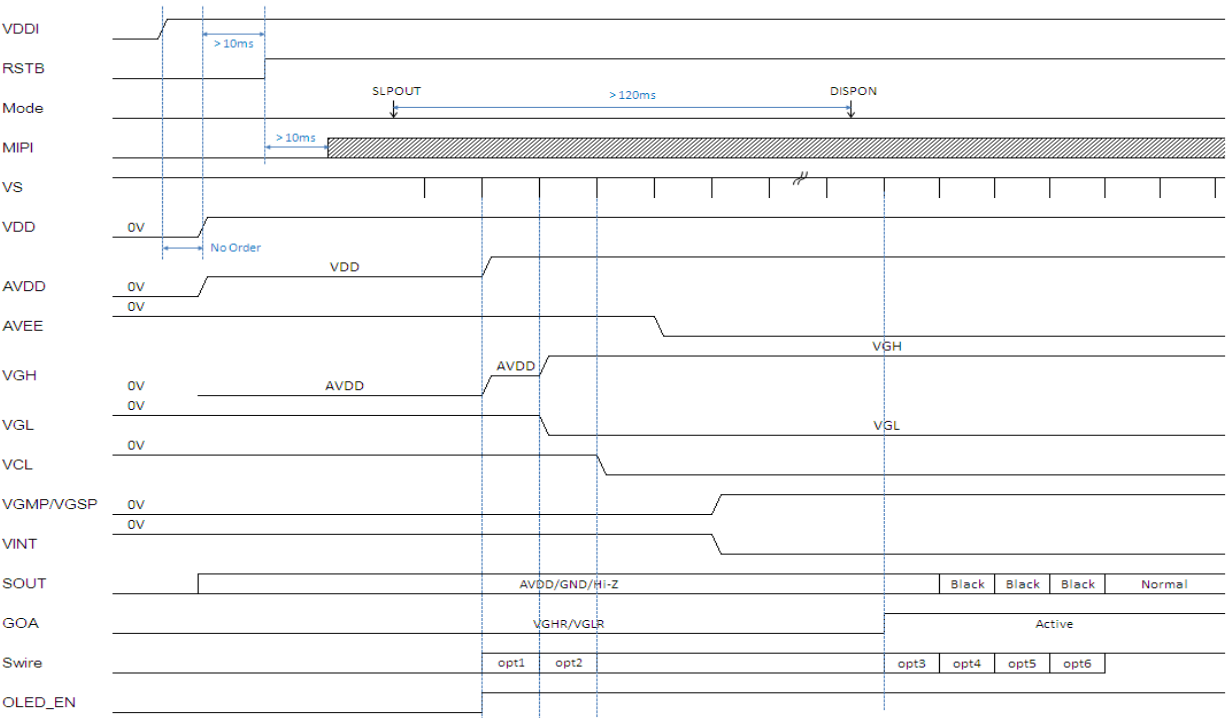

Yan Xian (Shenzhen) Technology Limited	Confidential: Level 2
	Page: 11/19
	Doc No:
Product Specification	Ver No:

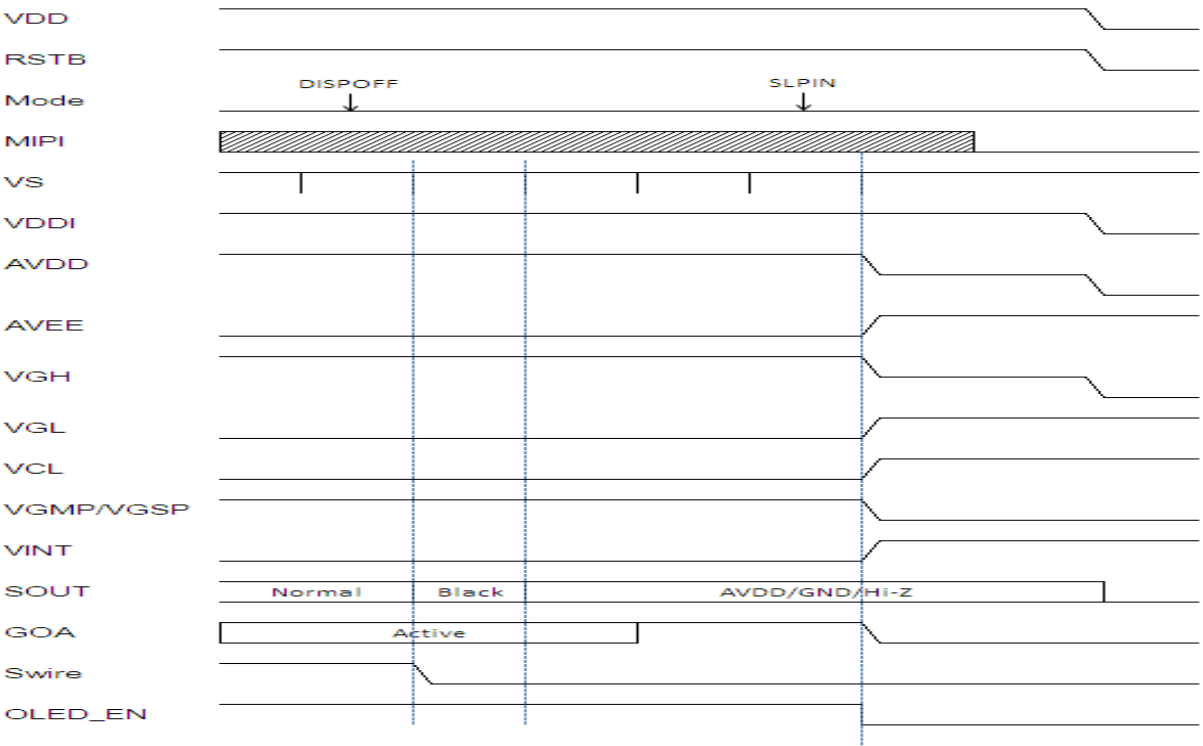


CONFIDENTIAL


Yan Xian (Shenzhen) Technology Limited Product Specification	Confidential: Level 2
	Page: 12/19
	Doc No:
	Ver No:

8.1 AC Characteristics (MIPI)


8.1.1 HS Data Transmission Burst

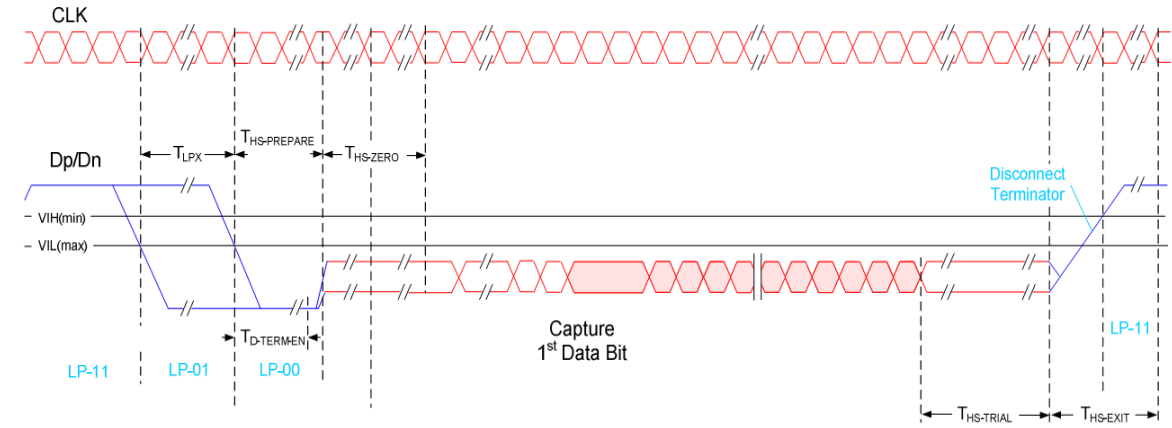

8.1.2 HS Clock Transmission

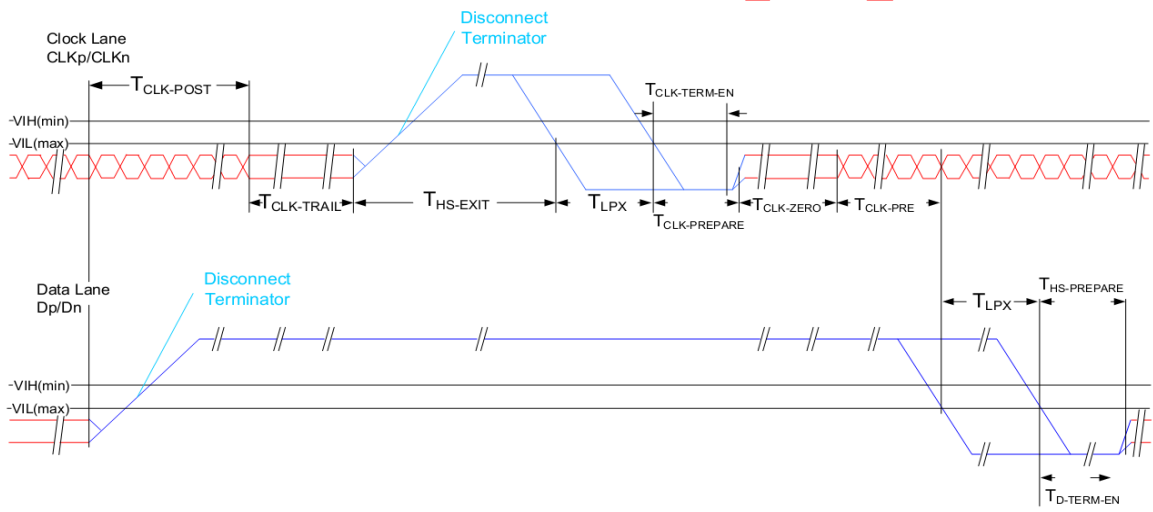

8.1.3 Turnaround Procedure

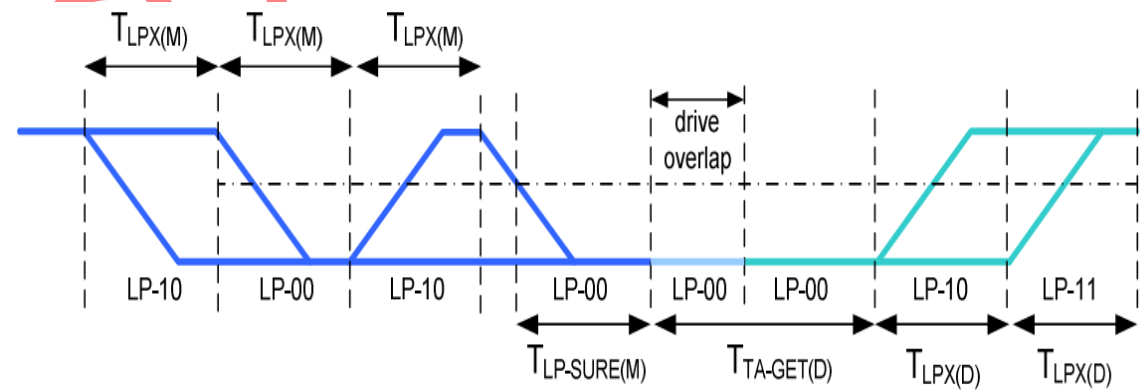

Yan Xian (Shenzhen) Technology Limited	Confidential: Level 2
	Page: 13/19
	Doc No:
	Ver No:
Product Specification	

8.1.4 Timing Parameters

Parameter	Description	Min	Typ	Max	Unit
TCLK-POST	Time that the transmitter continues to send HS clock after the last associated Data Lane has transitioned to LP Mode. Interval is defined as the period from the end of THS-TRAIL to the beginning of TCLK-TRAIL.	60ns + 52*UI	-	-	ns
TCLK-TRAIL	Time that the transmitter drives the HS-0 state after the last payload clock bit of a HS transmission burst.	60	-	-	ns
THS-EXIT	Time that the transmitter drives LP-11 following a HS burst.	300	-	-	ns
TCLK-TERM-EN	Time for the Clock Lane receiver to enable the HS line termination, starting from the time point when Dn crosses VIL, MAX.	Time for Dn to reach VTERM-EN	-	38	ns
TCLK-PREPARE	Time that the transmitter drives the Clock Lane LP-00 Line state immediately before the HS-0 Line state starting the HS transmission.	38	-	95	ns
TCLK-PRE	Time that the HS clock shall be driven by the transmitter prior to any associated Data Lane beginning the transition from LP to HS mode.	8	-	-	UI
TCLK-PREPARE + TCLK-ZERO	TCLK-PREPARE + time that the transmitter drives the HS-0 state prior to starting the Clock.	300	-	-	ns
TD-TERM-EN	Time for the Data Lane receiver to enable the HS line termination, starting from the time point when Dn crosses VIL, MAX .	Time for Dn to reach VTERM-EN	-	35 ns + 4*UI	ns
THS-PREPARE	Time that the transmitter drives the Data Lane LP-00 Line state immediately before the HS-0 Line state starting the HS transmission	40ns + 4*UI	-	85 ns + 6*UI	ns
THS-PREPARE + THS-ZERO	THS-PREPARE + time that the transmitter drives the HS-0 state prior to transmitting the Sync sequence.	145ns + 10*UI	-	85ns+6*UI	ns
THS-TRAIL	Time that the transmitter drives the flipped differential state after last payload data bit of a HS transmission burst	60ns + 4*UI	-	-	ns

Product Specification	Confidential: Level 2
	Page: 14/19
	Doc No:
	Ver No:

8.1.5 Timing requirements for RESETB

When RESETB of the reset pin equals to Low, it will be in the condition of reset.

When it is in the condition of reset, it will make the device recover the initial set.

However, in order to avoid the reset noise cause reset, there is a mechanism to judge about whether the reset is needed or not. The closed interval of Low can be shown as the following.

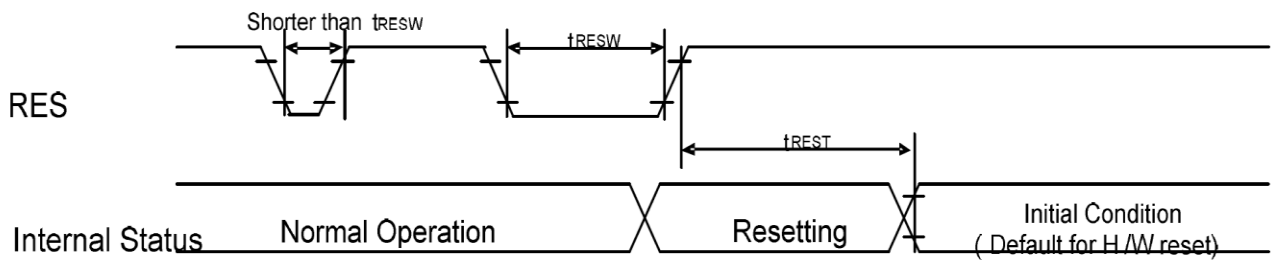


Figure: Reset timing


(Test condition: VDDIO=1.65V~3.6V, VSS=0V, TA=-20°C~+85°C)

Symbol	Parameter	Related Pins	Spec			Note	Unit
			Min.	Typ.	Max.		
T_{RESW}	Reset low pulse width	RESX	10				us
T_{REST}	Reset complete time	-			5	When reset applied during Sleep <i>in</i> mode	ms
		-			120	When reset applied during Sleep <i>out</i> mode	ms

Table: Reset timing

Yan Xian (Shenzhen) Technology Limited	Confidential: Level 2
	Page: 15/19
Product Specification	Doc No:
	Ver No:

8.2 Scan Direction

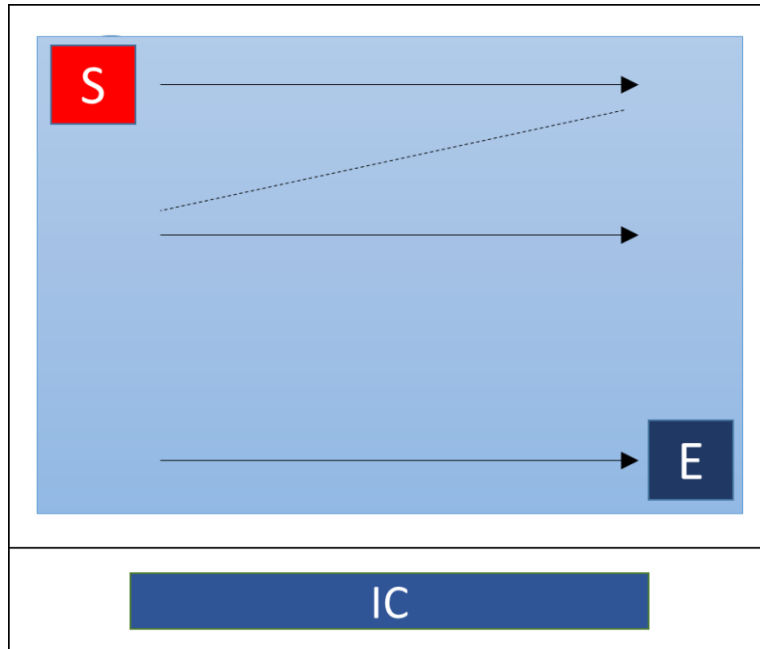

9 Reliability

9.1 Environmental Test

No	Item	Conditions(Note1)
1	High Temperature Operation	60℃ / 128 hours
2	High Temperature non-Operation	70℃ / 128 hours
3	Low Temperature Operation	-20℃ / 128 hours
4	Low Temperature non-Operation	-30℃ / 128 hours

9.2 Electrical Test

No	Item	Conditions
1	Air discharge	±4KV,150PF/330Ω (Module level)
2	Contact discharge	±3KV, 150PF/330Ω (Module level)

Yan Xian (Shenzhen) Technology Limited	Confidential: Level 2
	Page: 17/19
	Doc No:
	Ver No:
Product Specification	


11 Handling Precautions

- 11.2 When cleaning ITO pad, avoid using hard and abrasive material or corrosive solution.
- 11.3 Keep module away from direct sunlight or fluorescent light, and keep it at room temperature and humidity.
- 11.4 Strong impact & pressure on module and packing is prohibited.
- 11.5 Following normal power on/off sequence is necessary for preventing abnormal display or permanent damage to display.
- 11.6 Optimal contrast ratio under ideal voltage is AMOLED module's characteristic, hence it is recommended a voltage control function available.
- 11.7 Image sticking may occur if an image displays for an extended period of time.
- 11.8 When interfered by system's overall mechanical design, an abnormal display may occur.
- 11.9 After considering emitting energy, you should plan your design to satisfy EMI standards.
- 11.10 Host side should place a surge-prevent circuit at power trace (ie: VCI, Vddi) to protect AMOLED module.

12 Packing Specification

1. 整箱材料说明						
NO	料号	品名	材料	尺寸 (mm)	数量 (个)	备注
1	TBD	E295FCA62.A	FOG	52.912*62.58*0.65	180	
2	LA000001A	外箱标签	纸	52*100*0.1	1	
3	LA000002A	内箱标签	纸	52*100*0.075	2	
4	PK400026A	吸塑盘	PET	455*290*14	20	
5	PK500027A	EPE Spacer	EPE	395.24*220.46*1	36	
6	PK500001A	EPE填充物 (规格2)	EPE	457.00*292.00*10	4	
7	PK100001B	纸箱	纸	516*338*248	1	
8	PK200001A	纸盒	纸	459*294*115	2	
9	PK700001A	干燥剂	干燥剂	55*75	4	
10	PK300001A	静电防尘袋	PE	660*440*0.28	2	
11	PK600001A	PP板	PP	457*292*5	2	
12	PK500002A	EPE护角	EPE	120*244*100	4	
13	TBD	栈板	木材	TBD	1/30	
2. 整栈板产品数量说明						
(1) 整个吸塑盘的产品数量		每列的产品数量2个X每行的产品数量5个=10个				
(2) 整个纸盒的产品数量		整个吸塑盘的产品数量10个X包装产品的吸塑盘数量9个 (不包括最上方的空盘)=90				
(3) 整个纸箱的产品数量		整个纸盒的产品数量90个X包装产品的纸盒数量2个=180个				
(3) 整个栈板的产品数量		整箱产品数量180个X纸箱的数量30个=5400个				

Yan Xian (Shenzhen) Technology Limited	Confidential: Level 2
	Page: 18/19
Product Specification	Doc No:
	Ver No:

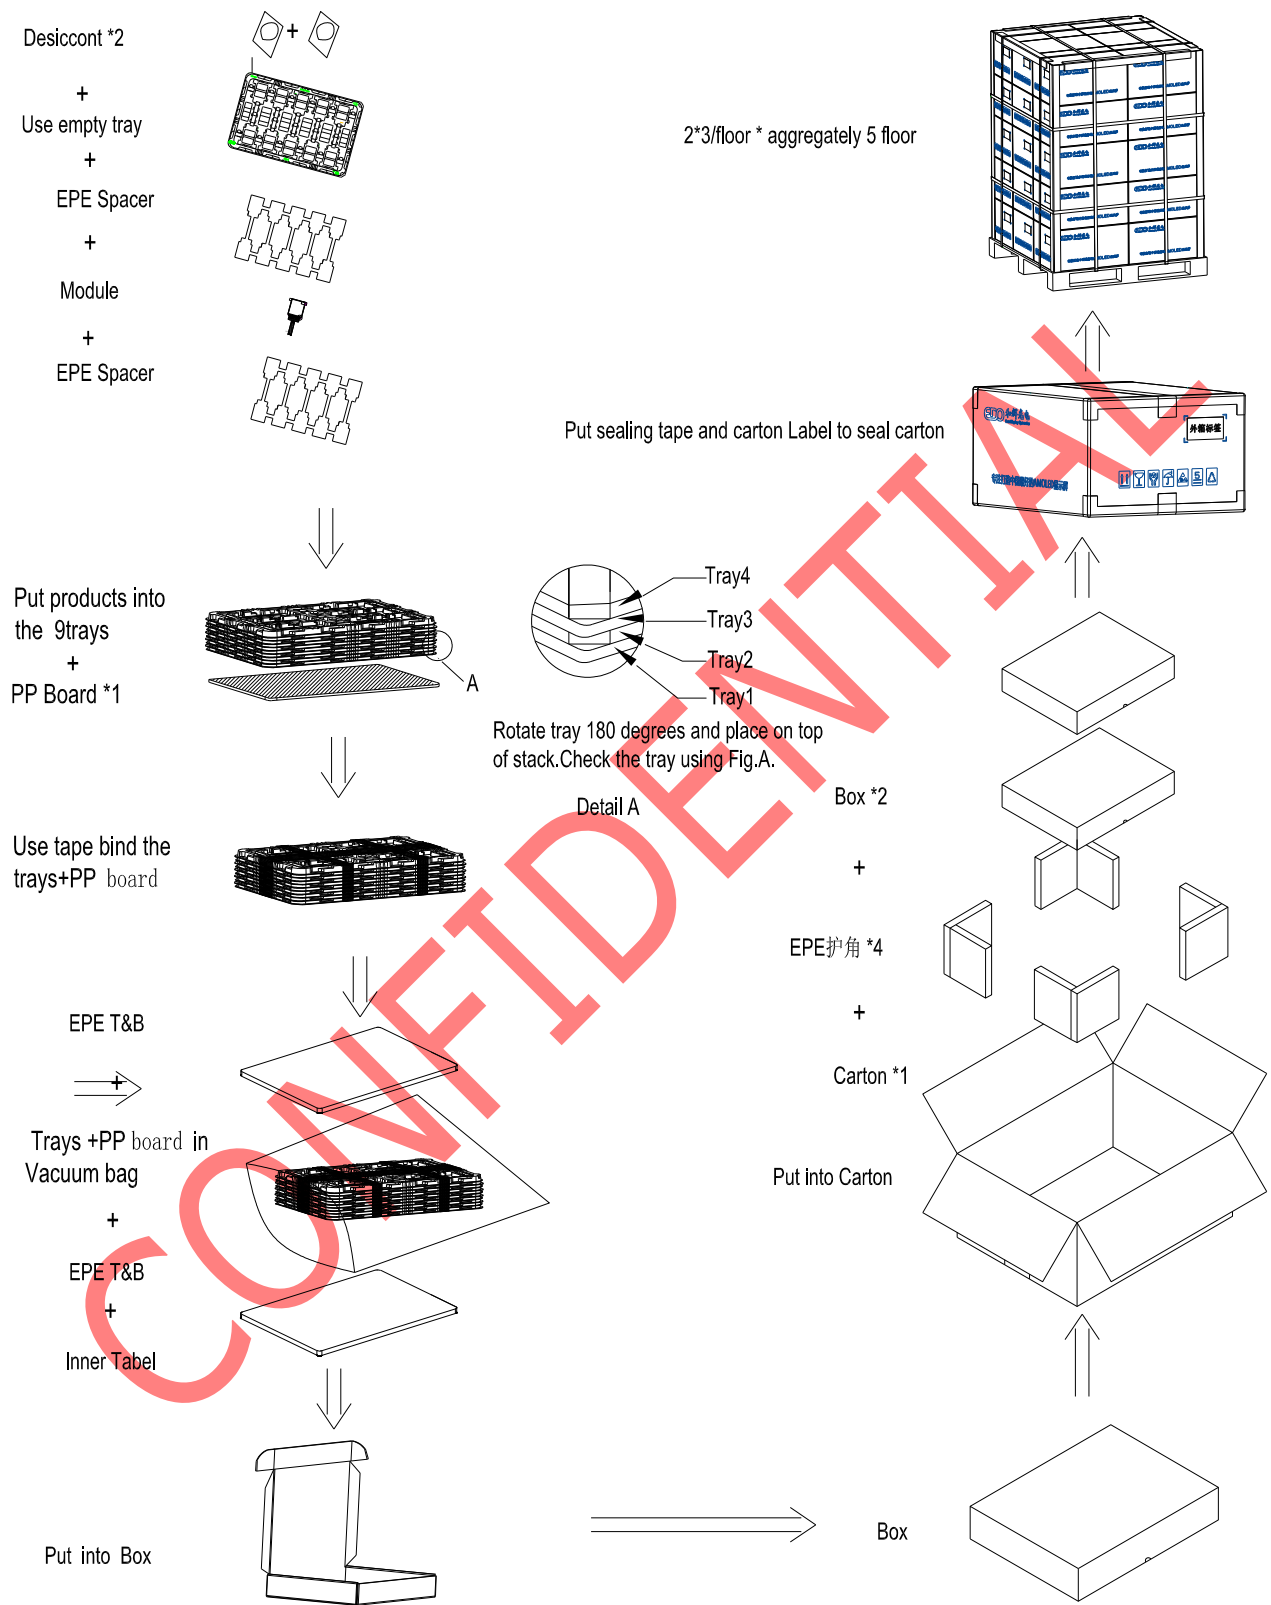

Yan Xian (Shenzhen) Technology Limited	Confidential: Level 2
	Page: 19/19
Product Specification	Doc No:
	Ver No:

13 The Control of Hazardous substances

The Control of Hazardous substances refer to EDO document 《有害物质管控标准书》
(Standard document for the Control of Hazardous substances) EDO-IS-110, Version 05

CONFIDENTIAL