


54/74 FAMILIES OF COMPATIBLE TTL CIRCUITS

PIN ASSIGNMENTS (TOP VIEWS)

512-BIT PROGRAMMABLE READ-ONLY MEMORIES

186 64 8-BIT WORDS
OPEN-COLLECTOR OUTPUTS

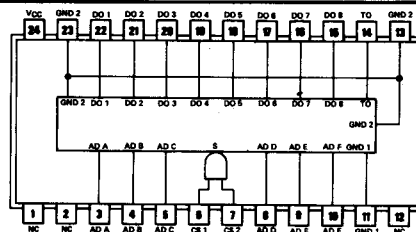


For more information contact the factory

~~SN54186 (J, W)~~ ~~SN74186 (J, N)~~
NC — No internal connection

1024-BIT READ-ONLY MEMORIES

187 256 4-BIT WORDS
OPEN-COLLECTOR OUTPUTS



For more information contact the factory

~~SN54187 (J, W)~~ ~~SN74187 (J, N)~~

256-BIT

188


SN54188

Not

Located

See Bi


dition.



~~SN54188 (J, W)~~ ~~SN74188 (J, N)~~
(Redesignated TBP18SA030)

64-BIT

189



~~SN54189 (J, W)~~ ~~SN74189 (J, N)~~

See Bipolar Microcomputer Components Data Book, second edition.