

IoT Bootcamp - Virtual Lessons

Brian Rashap

April 10, 2020

Contents

Preface	11
1 Virtual Lesson 1	12
1.1 Tutorial 1	12
1.1.1 Data Types	12
1.1.2 Boolean	13
1.1.3 While Loops	15
1.2 Lesson 1 Assignments	15
1.2.1 Coding	15
1.2.2 Fusion 360	16
1.2.3 Product Planning	16
2 Virtual Lesson 2	18
2.1 Tutorial 2	18
2.1.1 Serial Input	18
2.1.2 Switch Case	20

CONTENTS	2
2.2 Lesson 2 Assignments	21
2.2.1 Coding	21
2.2.2 Fusion 360	22
2.2.3 Product Planning	22
3 Virtual Lesson 3	23
3.1 Tutorial 3	23
3.1.1 Functions	23
3.1.2 Random Numbers	23
3.1.3 Arrays	25
3.2 Lesson 3 Assignments	27
3.2.1 Coding	27
3.2.2 Fusion 360	28
3.2.3 Fritzing	29
4 Virtual Lesson 4	31
4.1 Simon	31
4.2 OLED Display Revisited	32
4.3 Virtual 4 Assignments	33
4.3.1 Coding	33
4.3.2 Fusion 360	33
5 Virtual Lesson 5	35

CONTENTS	3
5.1 Virtual 5 Assignment	35
5.2 Smart Room Controller	38
5.2.1 Student Project Repository	38
5.2.2 Smart Room Controller Specifications	39
6 Virtual Lesson 6	41
6.1 Argon Overview	41
6.1.1 Features	41
6.2 Why Particle	43
6.3 Virtual Lesson 6 Assignment	44
6.3.1 Coding	44
6.3.2 Fusion 360	45
6.3.3 Software for Particle Argon	45
7 Virtual Lesson 7	47
7.1 Serial.Read() and Assignment	47
7.2 Argon Set-Up	49
7.2.1 Particle IoT App	49
7.2.2 Particle CLI Setup	56
7.3 Particle Not Connecting to Cloud	60
8 Virtual Lesson 8	61
8.1 Command Palette	61

CONTENTS	4
8.2 Formatted Printing	61
8.3 Virtual Lesson 8 Assignment	64
8.3.1 Particle inputs and outputs	64
8.3.2 Fusion 360	66
8.3.3 Smart Room Controller and Simon®	66
APPENDICES	68
A Functions	68
B Number Systems used by computers	72
B.1 Bases	72
B.2 Binary	73
B.3 Binary: Counting and Converting	73
B.4 Converting from DEC to BIN	74
B.5 Bits, Nibbles, and Bytes	75
B.6 Hexidecimal Basics	76
B.7 Counting in HEX	77
B.8 HEX identifiers	77
B.9 Converting Hex to Decimal	79
C GITHUB	80
C.1 Cloning an existing repository	80

<i>CONTENTS</i>	5
C.2 Getting the latest updates	80
C.3 Placing your edits into the repository	80
D Lineage of Programming Languages	82
D.1 FORTRAN	82
D.2 ALGOL	83
D.3 CPL	84
D.4 BCPL	84
D.5 B	85
D.6 C	86
D.7 C++	86
D.8 Python	87
D.9 PHP	88

List of Figures

2.1	Serial Input	20
3.1	Example Board	29
3.2	Importing Part into Fritzing	30
4.1	Simon ® Flow Chart	34
5.1	Adafruit Dashboard	36
5.2	Controlling for Adafruit	36
5.3	ThingSpeak Dashboard	37
5.4	Smart City Dashboard	37
5.5	Smart City Lighting	38
5.6	IF Then Then That	40
6.1	Particle Argon Pin Layout	42
6.2	Particle's Global Reach	43
6.3	Edge to Cloud	44

LIST OF FIGURES 7

6.4	Prototyping and Production	44
6.5	Visual Studio Code	46
6.6	Visual Studio Code	46
7.1	Particle Argon Setup	49
7.2	Particle Argon Setup	50
7.3	Particle Argon Setup	50
7.4	Particle Argon Setup	51
7.5	Particle Argon Setup	51
7.6	Particle Argon Setup	52
7.7	Particle Argon Setup	52
7.8	Particle Argon Setup	53
7.9	Particle Argon Setup	53
7.10	Particle Argon Setup	54
7.11	Particle Argon Setup	54
7.12	Particle Argon Setup	55
7.13	Particle Argon Setup	55
7.14	Particle Argon Setup	56
7.15	Particle Argon Setup	57
7.16	Particle Argon Setup	57
7.17	Particle Argon Setup: particle serial identify	58
7.18	Particle Argon Setup: particle serial identify	58

<i>LIST OF FIGURES</i>	8
7.19 Particle Argon Setup: particle serial wifi	58
7.20 Particle Argon Setup: particle device add	58
7.21 Particle Argon Setup: particle device rename	59
7.22 Particle Argon Setup: particle serial list	59
7.23 Particle Argon Setup: particle flash	60
8.1 Visual Studio Code Command Palette	62
8.2 Formatted Printing	62
8.3 Hello Particle Schematic	64
8.4 Particle Argon Pin Layout	65
A.1 Anatomy of a C function	68
D.1 Program Language Lineage	83

List of Tables

B.1	Decimal to Binary Conversion	74
B.2	Bits, Nibbles, and Bytes	76
B.3	Convert Decimal to Hexidecimal	77
B.4	Hex Identifiers	78

List of Code Listings

2.1	Serial Input	19
3.1	Roll a Die	24
A.1	Ardunio Functions	70
A.2	Example Functions	71

Preface

The IoT Bootcamp by its very nature is ideally an hands-on and collaborative environment, over the next few weeks we will make the best of having to work together virtually.

In this document, which will be updated daily and posted to a new Git Classroom assignment, will be

- Tutorial of IoT coding or hardware concepts
- References for learning more about a topic
- Exercises to be completed each day. These will include:
 - Starter code that you will need to complete
 - Online Fusion 360 lessons
 - Product design and layout (Fritzing) assignments

Please save all your work in the Git Classroom repository that you downloaded morning. Remember to "push" your repository back to the Git Classroom at the end of the day. A reminder of Git functions can be found in Appendix C of this document.

Chapter 1

Virtual Lesson 1

1.1 Tutorial 1

1.1.1 Data Types

The Arduino environment is really just C++ with library support and built-in assumptions about the target environment to simplify the coding process. C++ defines a number of different data types.

The Teensy's ARM Cortex processor is a 32-bit processor (Arduino boards use a 16-bit processor). This is why the int data type on the Teensy is 4-bytes (32 bits / 8 bits per byte). As a result, the data types are different from an Arduino and in order to keep the code compatible, some data types are duplicates (i.e., on the Teensy int and long are the same). Also, signed variables allow both positive and negative numbers, while unsigned variables allow only positive values.

- bool (8 bit) - simple logical true/false
- byte (8 bit) - unsigned number from 0-255
- char (8 bit) - while technically a signed number from -128 to 127. The compiler will interpret this data type as a character

- unsigned char (8 bit) - same as 'byte'; if this is what you're after, you should use 'byte' instead, for reasons of clarity
- unsigned short (16 bit) - unsigned number from 0-65535
- short (16 bit) - signed number from -32768 to 32767.
- unsigned int (32 bit) - unsigned number from 0-4,294,967,295.
- int (32 bit) - signed number from -2,147,483,648 to 2,147,483,647. This is most commonly what you see used for general purpose variables in Arduino example code provided with the IDE.
- unsigned long (32 bit) - on the Teensy, same as unsigned int. The most common usage of this is to store the result of the millis() function, which returns the number of milliseconds the current code has been running
- long (32 bit) - on the Teensy, same as int.
- float (32 bit) - signed number from -3.4028235E38 to 3.4028235E38. Floating point on the Arduino is not native; the compiler has to jump through hoops to make it work. If you can avoid it, you should. We'll touch on this later.

1.1.2 Boolean

A data type: bool holds one of two values, either true or false. For example, you can declare a boolean variable called buttonstate and set it to true.

```
1 bool buttonState;  
2  
3 buttonState = true;
```

Boolean Operators

There are three boolean operators

- NOT
- AND
- OR

The logical NOT (!) results in a true if the operand is false and vice versa.

This operator can be used inside the condition of an if statement.

```
1 if (!x) {      // if x is not true
2     // statements
3 }
```

or, it can be used to invert the boolean value.

```
1 x = false;
2 y = !x; // the inverted value of x is stored in y,
3     // so now = y = true
4 x = !x; // invert x, x = true
```

The logical AND (&&) results in true only if both operands are true.

Example Code This operator can be used inside the condition of an if statement.

```
1 // if BOTH the pins read HIGH
2 if (digitalRead(Pin2) == HIGH && digitalRead(Pin3) == HIGH)
3     // statements
4 }
```

The logical OR (||) results in a true if either of the two operands is true. This operator can be used inside the condition of an if statement.

```
1 // if either x or y is greater than zero
2 if (x > 0 || y > 0) {
3     // statements
4 }
```

1.1.3 While Loops

A while loop will loop continuously, and infinitely, until the expression inside the parenthesis () becomes false. Something must change the tested variable, or the while loop will never exit. This could be in your code, such as an incremented variable, or an external condition, such as testing a sensor or waiting for a button to be pressed.

```
1 while (buttonState == false) {  
2     // statement(s)  
3 }
```

There is also a do...while loop that works in the same manner as the while loop, with the exception that the condition is tested at the end of the loop, so the do loop will always run at least once.

```
1 do {  
2     // statement block  
3 } while (temperature < 72);
```

Tomorrow we will learn about the case statements.

1.2 Lesson 1 Assignments

1.2.1 Coding

Please complete the below coding assignments. The starter code is in your git classroom clone. Make sure that you are saving back into this repository so that your code is sent back to the instructor when you "push" as the end of the day. (HINT: you need to push your repository at the end of each day).

NOTE If you have only one button, look at the fritzing file in your respository (ifonlyonebutton.fzz) to see how you can approximate a button for the first lesson. And, please Slack your instructor letting them know you need additional buttons.

For each of the three below assignments, the instructions are in the comments at the top of the file. Before you start coding, draw a flowchart in your lab notebook to sketch out your logic.

1. V1_1_booleans
2. V1_2_timer
3. V1_3_timer_oneButton

1.2.2 Fusion 360

As part of product design, we will need to be proficient at using Fusion 360. While we got some exposure to using Fusion 360 in class during Week 2, we are going to go through the basics of Fusion 360 a second time to help us build proficiency.

Fusion 360 updated its user interface and many of the tutorials on the Autodesk website use the old interface. As we are still beginners, we will use the below tutorial which matches the user interface you'll see when using Fusion 360. In later Fusion 360 lessons, I will be including tutorials with the old interface, but at that time we should be proficient enough in the new interface to follow along.

For today's lesson, please complete the tutorial Fusion 360 for Absolute Beginners. <https://www.youtube.com/watch?v=qvrHuaHhqHI>

After completing the tutorial, please export (*File -> Export*) your .f3d file to your repository.

1.2.3 Product Planning

It is time to start to create the specifications for your Smart Room Controller. You are not laying out your board yet, nor are you coding. Today, you are just righting a description of what your controller will be able to do.

The minimum requirements are:

- Control at least one Hue smart bulb in the classroom
 - Be able to turn the bulb on and off
 - Be able to change the color of the bulb
 - Be able to dim the bulb (using the encoder)
- Control at least one WEMO smart outlet in the classroom
- The Neopixels should be used to give an indication of what is going on with both the bulb and the outlet.

Optional features you might consider

- Integration of a BME280
- Use of the OLED display
- Adding a sleep timer function to the WEMO control (i.e., the outlet turns off after either a predefined or user entered time period).

For today, you are to create a document that describes the functions that your Smart Room Controller will be able to do. You should document this in the myRoomController.txt file that is in your git classroom repository. In addition, you should list the components that you'll be using for your project. NOTE: if you pull the latest class_slides repository, there is a spreadsheet with all the parts that we have been using in the class. This might be helpful as you are thinking about your Smart Room Controller.

Chapter 2

Virtual Lesson 2

2.1 Tutorial 2

2.1.1 Serial Input

Up until now, we have only written to our computer screen. Through the serial monitor, we can also provide inputs to the Teensy.

First, let's remember that Serial is actual a class/object that we can apply methods (actions) to. When we type `Serial.begin(9600)`, we are telling the Serial object to begin with a communication rate of 9600 bits per second.

Another action we can take with the Serial Monitor is to input characters from it. This can be accomplished with the `Serial.available()` command which gets the number of bytes (characters) available for reading from the serial port. This is data that has already arrived and stored in the serial receive buffer (which holds 64 bytes). `Serial.read()` is then the method that actual reads from the Serial Monitor, one byte (or character at a time).

The code to bring in characters from the Serial Monitor is listed in Code Listing 2.1. A few things to note with this code:

```
1 /*
2  * Project: serialInput
3  * Description: take characters from the Serial Input and
4  *   convert to an integer
5  * Author: <your name>
6  * Date: <today's date>
7  */
8
9 /* Note: A String is a class of objects that behave
10 * like an array of char (individual characters)
11 * And, because it is an object, as we will see below,
12 * it has methods associated with it.
13 */
14
15 // ASSIGNMENT: type (don't cut/paste) the code from
   iot_virtual.pdf and run it
```

Code Listing 2.1: Serial Input

- Line 29 - keep looping as long as there is something to read from the buffer
- Line 30 - read from the Serial Monitor and place the byte/character into inChar.
- Line 32 - the isDigit() function is true if inChar is a number.
- Line 33 - if inChar is a number, convert to char using (char)inChar, otherwise skip it. That is, only numbers, not characters, are added to the string.
- Line 37 - so, how do we tell the Teensy that we hit enter. The "\n" is the byte that gets returned when "enter" is pressed.

Once you run the code, open the Serial Monitor. In the top line, above where the data from the Teensy is displayed, is where your inputs are entered. Then you press the "enter" key or push the "send" button to the right.

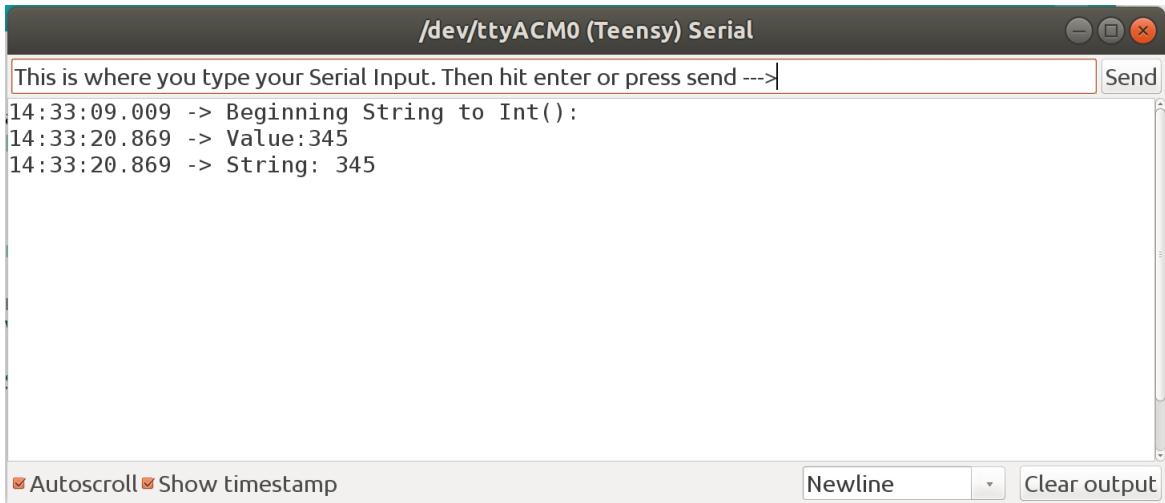


Figure 2.1: Serial Input

2.1.2 Switch Case

Like if statements, switch case controls the flow of programs by allowing programmers to specify different code that should be executed in various conditions. In particular, a switch statement compares the value of a variable to the values specified in case statements. When a case statement is found whose value matches that of the variable, the code in that case statement is run.

The "break" keyword exits the switch statement, and is typically used at the end of each case. Without a break statement, the switch statement will continue executing the following expressions ("falling-through") until a break, or the end of the switch statement is reached.

```
1 switch (var) {  
2     case label1:  
3         // statements  
4         break;  
5     case label2:  
6         // statements  
7         break;
```

```
8     default:
9         // statements
10        break;
11 }
```

In the above, "var" is a variable (either int or char) whose value to compare with various cases. And, "label1" and "label2" are constants (likewise, either int or char). For example:

```
1 int var      // variable used in switch
2
3 switch (var) {
4     case 1:
5         //do something when var equals 1
6         break;
7     case 2:
8         //do something when var equals 2
9         break;
10    default:
11        // if nothing else matches, do the default
12        // default is optional
13        break;
14 }
```

2.2 Lesson 2 Assignments

2.2.1 Coding

Please complete the below coding assignments. The starter code is in your git classroom clone. Make sure that you are saving back into this repository so that your code is sent back to the instructor when you "push" as the end of the day. (HINT: you need to push your repository at the end of each day).

NOTE If you have only one button, please Slack your instructor letting them know you need additional buttons. We will all need 4 buttons for the next lessons.

For each of the three below assignments, the instructions are in the comments at the top of the file. Before you start coding, draw a flowchart in your lab notebook to sketch out your logic.

1. V2_0_serialInput
2. V2_1_countdown
3. V1_2_switchcase

2.2.2 Fusion 360

For today's lesson, please complete the tutorial Fusion 360 for Absolute Beginners (2020) - Project # 2 at [https : //youtu.be/XC – 6AQksxHY](https://youtu.be/XC-6AQksxHY)

After completing the tutorial, please export (*File –> Export*) your .f3d file to your repository.

2.2.3 Product Planning

Continuing working on your Smart Room Controller planning, refining what you put together yesterday in Section 1.2.3.

Chapter 3

Virtual Lesson 3

3.1 Tutorial 3

3.1.1 Functions

We are going to get some more practice creating and using functions in today's lesson. Please review the details about functions in Appendix A.

3.1.2 Random Numbers

In the past lessons, we have occasionally used random numbers to make our code more interesting.

```
1 random(max)
2 random(min,max)
```

where min is the lower bound, inclusive, of the random value (it is assumed to be 0 if only max is used), and max is the upper bound, exclusive. This means that the function returns a random integer between min and (max-1). An example that uses the random function can be found in Code Listing 3.1.

```
1  /*
2   * Project: Dice
3   * Description: using switch case
4   */
5 int die;
6 void setup() {
7     Serial.begin(9600);
8     while(!Serial);
9 }
10 void loop() {
11     die = random(0,7); // return die roll between 0 and 6
12     Serial.println(die);
13     switch(die) {
14         case 1:
15             Serial.println("A one was rolled");
16             break;
17         case 2:
18             Serial.println("A two was rolled");
19             break;
20         case 3:
21             Serial.println("A three was rolled");
22             break;
23         case 4:
24             Serial.println("A four was rolled");
25             break;
26         case 5:
27             Serial.println("A five was rolled");
28             break;
29         case 6:
30             Serial.println("A six was rolled");
31             break;
32         default:
33             Serial.println("Illegal Die was Used");
34             break;
35     }
36     delay(500);
37 }
```

Code Listing 3.1: Roll a Die

You may notice that every time you restart your program it repeats the same sequence of random numbers. The `random()` is not actually random, but is actually a pseudo-random number generator (PRNG). The PRNG uses an algorithm for generating a sequence of numbers whose properties approximate the properties of sequences of truly random numbers. A seed value is used to start this pseudo-random sequence.

```
1 randomSeed(seed);
```

where `seed` is an unsigned long variable containing the seed value.

If we utilize a fixed seed value, then our program will always run through the same sequence of pseudo-random numbers. This can be useful for debugging our programs. However, if we want a new pseudo-random sequence every time we start our code, we can take advantage of a floating input. Recall, we used pull-down and pull-up with our buttons to ensure they were in a known state (known voltage) when not pressed. Now we can take advantage of the floating input to seed our PRNG. Using a pin that is not connected to anything, we can use `analogRead()` to see our random function.

```
1 randomSeed(analogRead(0));
```

where Pin 0 is left floating (not connected to power or ground).

3.1.3 Arrays

An array is a collection of variables that are accessed with an index number. Arrays in the C++ programming language are written in can be complicated, but using simple arrays is relatively straightforward.

There are several different ways to declare an array.

```
1 int myInts[6];
2 int myPins[] = {2, 4, 8, 3, 6};
3 int mySensVals[6] = {2, 4, -8, 3, 2};
4 char message[6] = "hello";
```

- You can declare an array without initializing it as in `myInts`.

- In myPins we declare an array without explicitly choosing a size. The compiler counts the elements and creates an array of the appropriate size.
- You can both initialize and size your array, as in mySensVals.
- For an array of characters (char), one more element than your initialization is required, to hold the required null character. So, the character array message needs to have a size of 6, five for the letters H-E-L-L-O, and one for the null character that ends the array.

To assign a value to an array:

```
1 mySensVals[0] = 10;
```

To retrieve a value from an array:

```
1 x = mySensVals[4];
```

Arrays and FOR Loops Arrays are often manipulated inside for loops, where the loop counter is used as the index for each array element. For example, to print the elements of an array over the serial port, you could do something like this:

```
1 for (byte i = 0; i < 5; i = i + 1) {  
2     Serial.println(myPins[i]);  
3 }
```

CAUTION: Arrays are zero indexed, that is, referring to the array initialization above, the first element of the array is at index 0. This means that in an array with ten elements, index nine is the last element. Hence:

```
1 int myArray [10]={9, 3, 2, 4, 3, 2, 7, 8, 9, 11};  
2 x = myArray [9];      // contains 11  
3 y = myArray [10];    // is invalid and contains random  
                      information (other memory address)
```

For this reason you should be careful in accessing arrays. Accessing past the end of an array (using an index number greater than your declared array size - 1) is reading from memory that is in use for other purposes. Reading from these locations is probably not going to do much except yield invalid data. Writing to random memory locations is definitely a bad idea and can often lead to unhappy results such as crashes or program malfunction. This can also be a difficult bug to track down.

3.2 Lesson 3 Assignments

Before you start these current assignments, it might be a good time to clean up your file structure. If you saved files from the class outside of the GIT Classroom Repositories, then you can do some clean up by moving them to the appropriate locations. Also, please make sure that all your repositories from the in-person classes and the previous 2 virtual lessons have been pushed back to GIT Classroom. Instructions are in Appendix C.

3.2.1 Coding

Please complete the below coding assignments. The starter code is in your git classroom clone. Make sure that you are saving back into this repository so that your code is sent back to the instructor when you "push" at the end of the day. Don't forget to do the push. And, feel free to push after each assignment.

For each of the two below assignments, the instructions are in the comments at the top of the file. Before you start coding, draw a flowchart in your lab notebook to sketch out your logic.

1. V3_0_functions
2. V3_1_fillanArray

3.2.2 Fusion 360

Over the next week, you should work through these Fusion 360 tutorials. The first two you already did as part of Virtual Lesson 1 and 2. I include the links, but you can also just Google the name of the video and it should come up.

- Fusion 360 for Absolute Beginners at:
<https://www.youtube.com/watch?v=qvrHuaHhqHI>
- Fusion 360 for Absolute Beginners (2020) - Project # 2 at:
<https://youtu.be/XC-6AQksxHY>
- Fusion 360 Tutorial for Makers (2020) - Custom Name Plate at: <https://www.youtube.com/watch?v=ju247tQHKso>
- How to 3D Model a Lego Brick - Learn Autodesk Fusion 360 in 30 Days: Day #1 (REVISED) at:
<https://www.youtube.com/watch?v=6yPKMSb6ja8>

After completing each tutorial, please export (*File -> Export*) your .f3d file to your repository.

3.2.3 Fritzing

Please create a Fritzing layout with the following elements and then wire this onto your board.

- The Teensy
- Four NeoPixels
- Four Buttons

As always, before you start your Fritzing layout, please draw the layout in your lab notebook. There is a starter fritzing file called buttons4neo4.fzz in your GIT Classroom repository pull for this lesson.

As a suggestion for things to come, it would make some sense if your buttons are in the proximity of the individual NeoPixels. While you don't have to copy my layout, I have included a picture of the instructor board of it in Figure 3.1 as a reference.

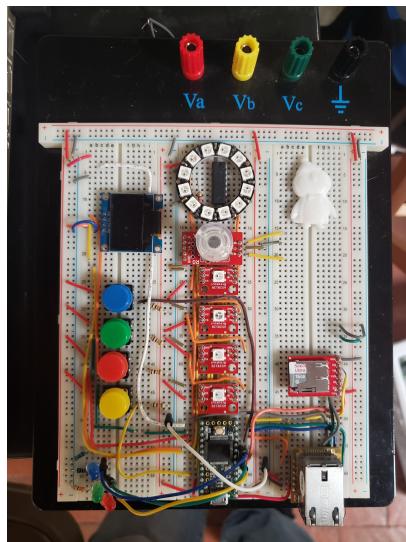


Figure 3.1: Example Board

Also, there are four button parts that are included in the Virtual 3 repository. Please import them into you Fritzing using the "Import" function. It can be accessed by clicking the 4 bars near the "search bar" in the Parts Window located by the arrow in Figure 3.2. And then you can access the parts by selecting the MINE tab at the left of the Parts Window.

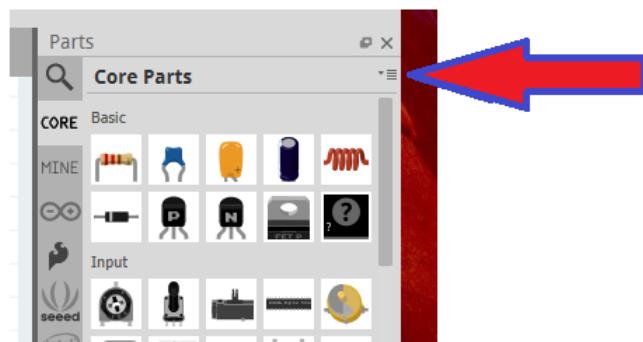


Figure 3.2: Importing Part into Fritzing

Chapter 4

Virtual Lesson 4

This week we are going to focus on integrating concepts that we have already learned. We will build and play the game Simon® and code up our Smart Room Controller. There are a few new concepts that will be introduced, but we will mostly focus on integration.

In Section 3.1.2, we were introduced to random numbers. This section has been updated, so please go back and learn about *randomSeed()*.

4.1 Simon

Simon® is an electronic game of memory skill invented by Ralph H. Baer and Howard J. Morrison, working for toy design firm Marvin Glass and Associates, with software programming by Lenny Cope. The device creates a series of tones and lights and requires a user to repeat the sequence. If the user succeeds, the series becomes progressively longer and more complex. Once the user fails or the time limit runs out, the game is over. The original version was manufactured and distributed by Milton Bradley. If you are not familiar with Simon®, please check out this video:

<https://www.youtube.com/watch?v=PK7zc28IGPc>

4.2 OLED Display Revisited

Up until now, we have been using the ACROBOTIC_SSD1306 library with our OLED display. This library is very simple, but also very limited. It only allows characters of one size in 8 rows by 16 characters. An alternative library is the Adafruit_SSD1306 library (and the Adafruit_GFX graphics library). This library gives us full control of the 128x32 pixels on your OLED display and includes the ability to:

- Change font size
- Invert the screen (black on white)
- Draw lines, circles, triangles, and squares
- Scroll text
- Display bitmap images¹

Here is some example code:

```

1 display.clearDisplay();
2
3 display.setTextSize(1);           // Normal 1:1 pixel scale
4 display.setTextColor(SSD1306_WHITE); // Draw white text
5 display.setCursor(0,0);          // Start at top-left corner
6 display.println(F("Hello, world!"));
7
8 display.setTextColor(SSD1306_BLACK, SSD1306_WHITE); // Draw 'inverse' text
9 display.println(3.141592);
10
11 display.setTextSize(2);         // Draw 2X-scale text
12 display.setTextColor(SSD1306_WHITE);
13 display.print(F("0x")); display.println(0xDEADBEEF, HEX);
14
15 display.display();

```

¹A bitmap describes a type of image that web-users encounter all the time without realizing it. Basically, it's a grid where each individual square is a pixel that contains color information. The key characteristics are the number of pixels (or squares in the grid), and the amount of information in each grid square (pixel).

4.3 Virtual 4 Assignments

4.3.1 Coding

Please complete the below coding assignments. The starter code is in your git classroom clone. Make sure that you are saving back into this repository so that your code is sent back to the instructor when you "push" at the end of the day. Don't forget to do the push. And, feel free to push after each assignment.


For each of the two below assignments, the instructions are in the comments at the top of the file. For the first coding assignment, before you start coding, draw a flowchart in your lab notebook to sketch out your logic. The second assignment will have us modify some existing code to utilize the Adafruit_SSD1306 library.

1. V04_01_UserArray
2. V04_02_BMEREvisited: for this assignment, you will use Example – > Adafruit_SSD1306 – > ssd1306_128x32_i2c to learn about this library
3. V04_03_Simon: there is no starter code for this. Use your previous code and the flow chart in Figure 4.1 to code the Simon® game. Save in the Virtual-04 repository.

4.3.2 Fusion 360

We will continue to our Fusion 360 learning by completing the below tutorial.

How to 3D Model an Ice Cube Tray - Learn Autodesk Fusion 360 in 30 Days: Day #5 at: <https://www.youtube.com/watch?v=qvrHuaHhqHI>

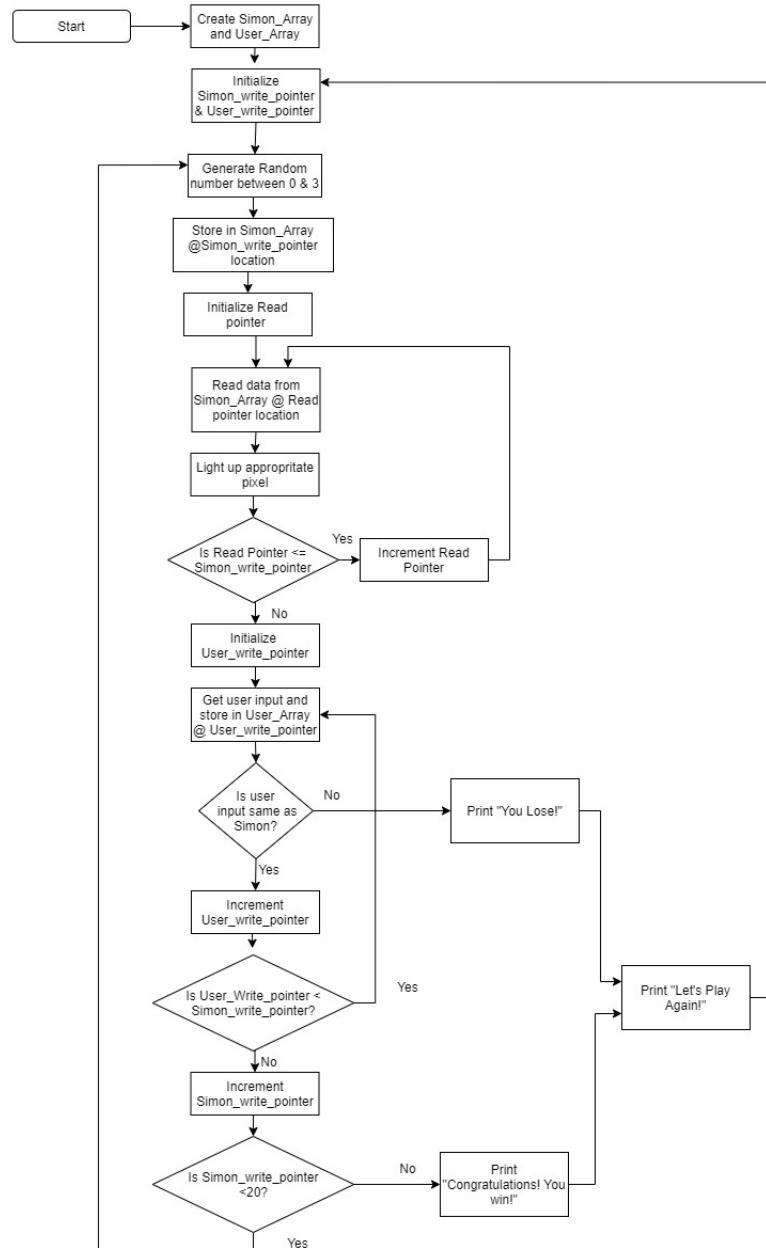

Simon Game Flowchart

Figure 4.1: Simon ® Flow Chart

Chapter 5

Virtual Lesson 5

Today we will be continuing with integration. You should be working on your Simon® game from Virtual Lesson 4.

In addition, today we have a special guest, Molly Blumhoefer, CNM's Sustainability Manager. She will be showing us a few of CNM's smart facilities dashboard. As preparation for this, I have included in this section a preview of some of the dashboards that we will be working with once we transition to the Particle Argon microcontroller. The can be seen in Figures 5.1 through 5.5.

5.1 Virtual 5 Assignment

1. Finish coding assignments from Lesson 4. I will be updating the instructor_master repository with the Simon code at the end of today.
2. Start Coding your Smart Room Controller, see the following section.

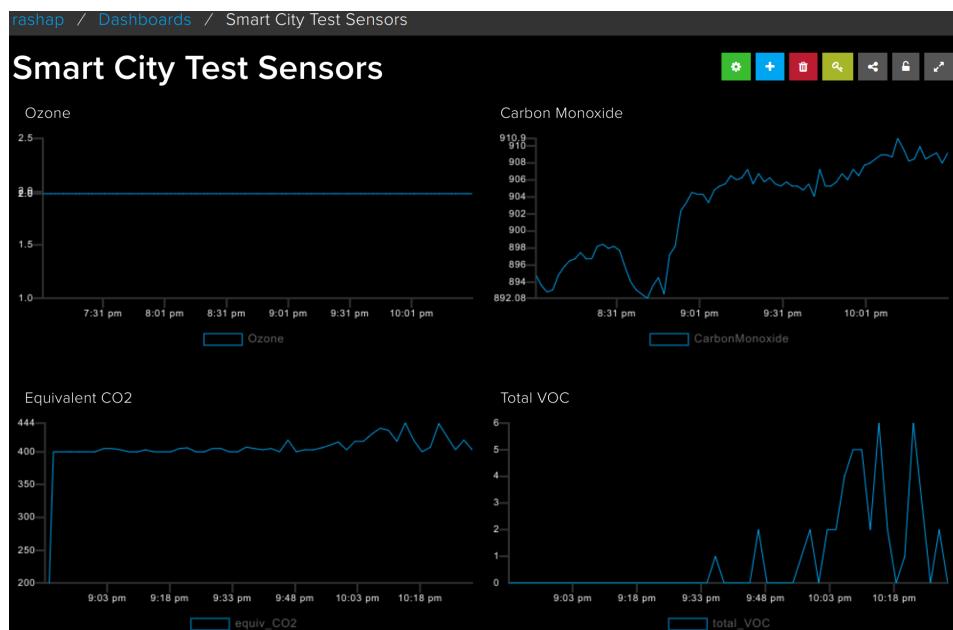


Figure 5.1: Adafruit Dashboard

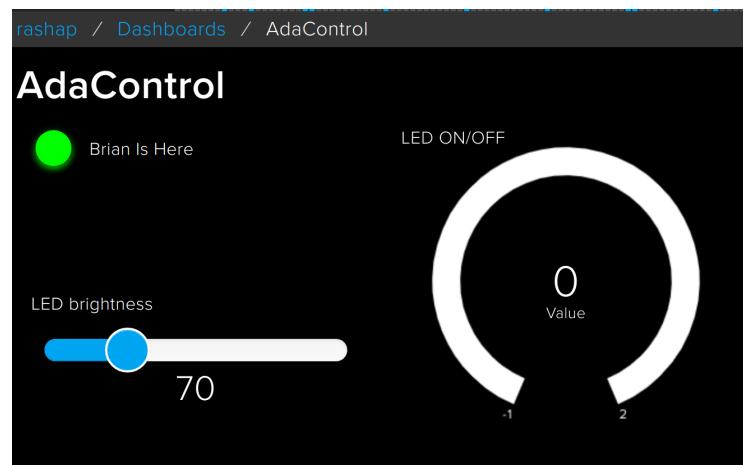


Figure 5.2: Controlling for Adafruit

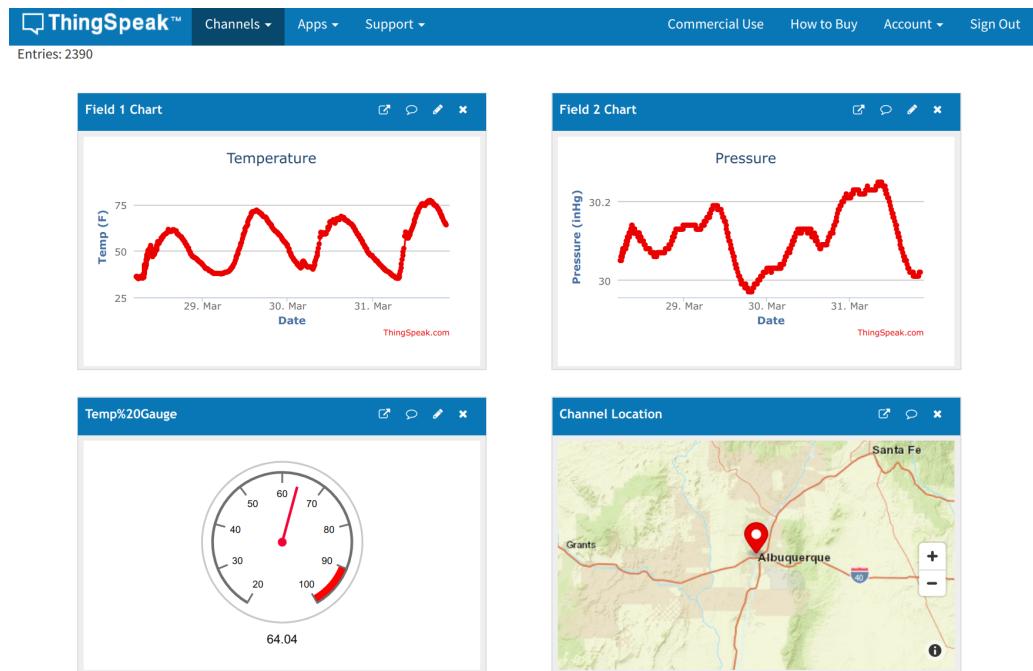


Figure 5.3: ThingSpeak Dashboard



Figure 5.4: Smart City Dashboard

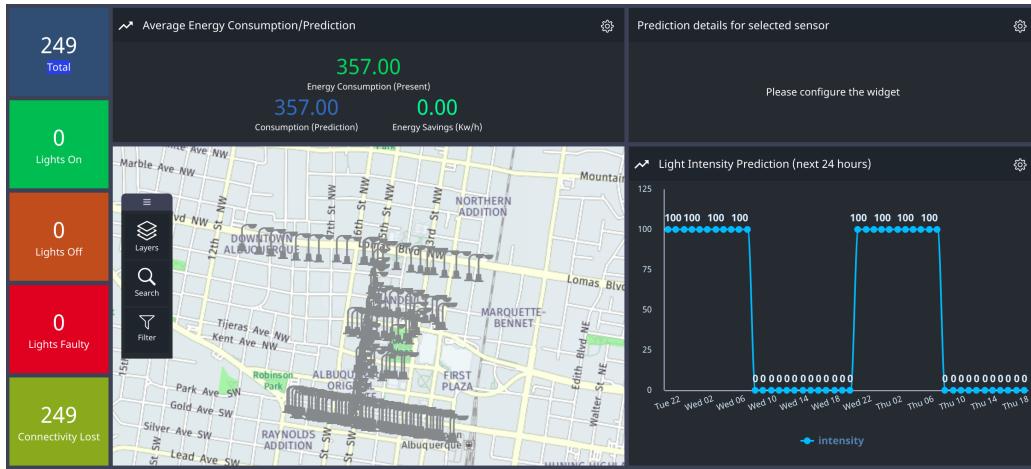


Figure 5.5: Smart City Lighting

5.2 Smart Room Controller

5.2.1 Student Project Repository

I have setup a GIT Classroom repository for each of you to store notes, flow charts, code, Fusion 360 models, etc. for your individual projects. Please go to <https://classroom.github.com/a/u8ljFbOJ> accept this respository and clone it in your Documents – > <yourname> directory.

Some of you completed the assignment from Virtual Lesson 1 to define the specifications for your Smart Room Controller. There are some fairly innovative ideas. For those of you that haven't had a chance create specifications, please use the specifications in the next section.

Given that we don't have access to the IoT Classroom with the Hue Smart Hub and the Wemo outlets we are going to simulate this portion. We will use two of our NeoPixels to be indicators for a light and outlets. In order to do this, you will need to create four functions that we will replace with actual code when we get back into the classroom.

- void SetHue(color, brightness) - turn the Hue "NeoPixel" to the required color and brightness
- void GetHue() - this can be a blank function that you call each time after you call SetHue. It is a nuance of the Hue API.
- void WemoOn(outlet) - turn the Wemo "NeoPixel" to blue for the first outlet, yellow for the second outlet, and green for both outlets.
- void WemoOff(outlet) - turn off the appropriate "outlet."

5.2.2 Smart Room Controller Specifications

Your Smart Room Controller should have, at least, the following functionality. This will be easier to code if you write flow charts for each function and then combine them.

- Encoder button turns the "Hue light" on and off. The Encoder LED should indicate on (Green) or off (Red).
- Use the Encoder as a dimmer to change the brightness of the "Hue Light" from 0 to 255. The Pixel Ring should also show the brightness level. You should research the *map()* function as an easy way to map the 96 encoder positions to the 256 brightness levels of the "Hue Light." <https://www.arduino.cc/reference/en/language/functions/math/map/>
- Use one of the buttons to change the color of the "Hue Light" cycling through the colors of the rainbow. The Pixel Ring should change color along with the "Hue Light."
- Use the other button to turn on and off the "Wemo outlets." One click for on/off. Double click to select between the two "Wemo Outlets." A NeoPixel near the button should indicate which outlet is selected (Blue or Yellow).
- OPTIONAL: Use the OLED Display to assist the user by showing the controller settings.

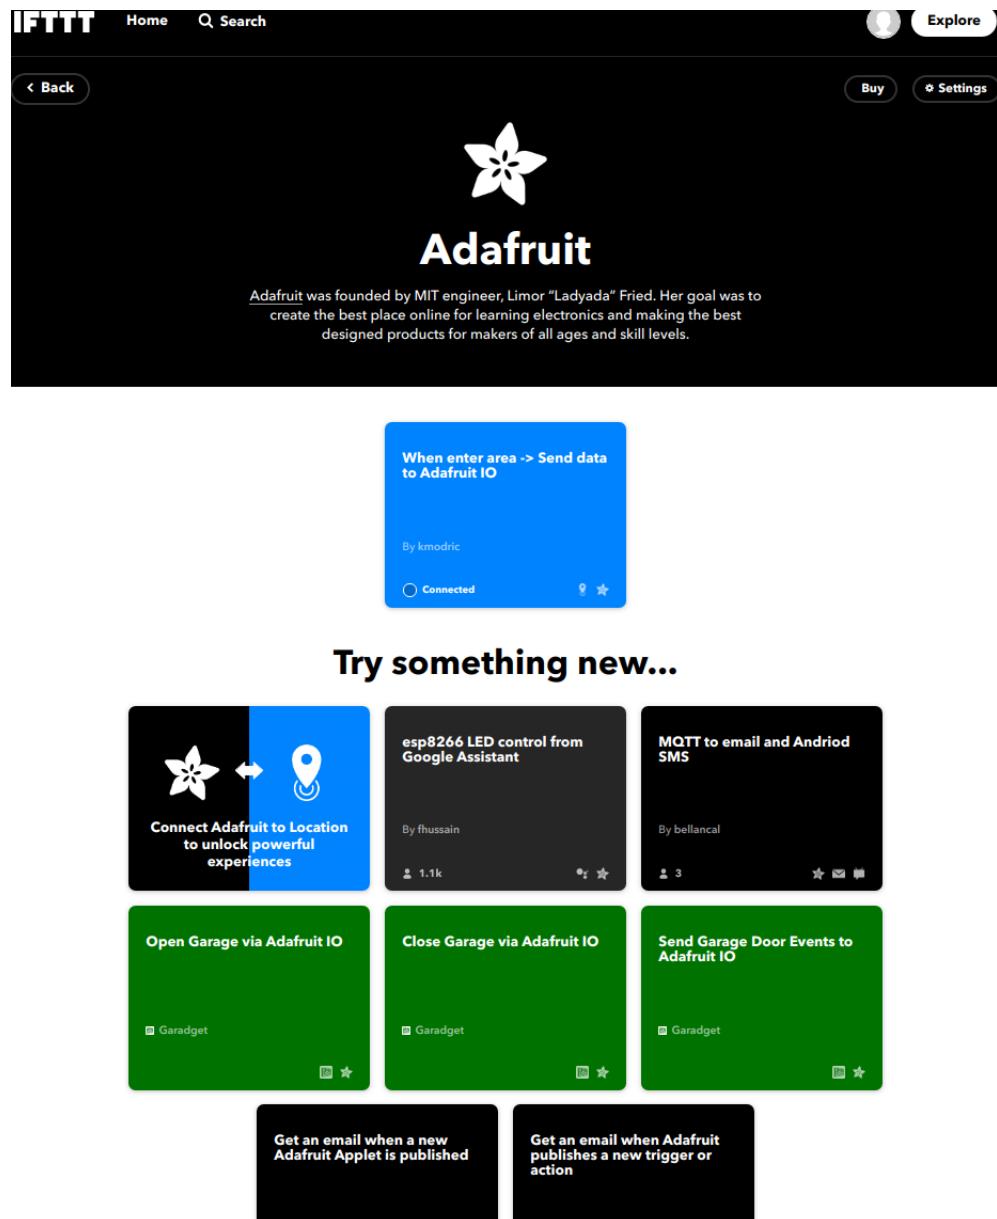


Figure 5.6: IF Then Then That

Chapter 6

Virtual Lesson 6

In this lesson we will prepare for transitioning to the Particle Argon microcontroller by installing Visual Studio Code and the Particle CLI.

6.1 Argon Overview


The Argon is a powerful Wi-Fi enabled development board that can act as either a standalone Wi-Fi endpoint or Wi-Fi enabled gateway for Particle Mesh networks. It is based on the Nordic nRF52840 and has built-in battery charging circuitry so it's easy to connect a Li-Po and deploy your local network in minutes.

The Argon is great for connecting existing projects to the Particle Device Cloud or as a gateway to connect an entire group of local endpoints.

6.1.1 Features

- Espressif ESP32-D0WD 2.4 GHz Wi-Fi coprocessor
 - On-board 4MB flash for ESP32

Figure 6.1: Particle Argon Pin Layout

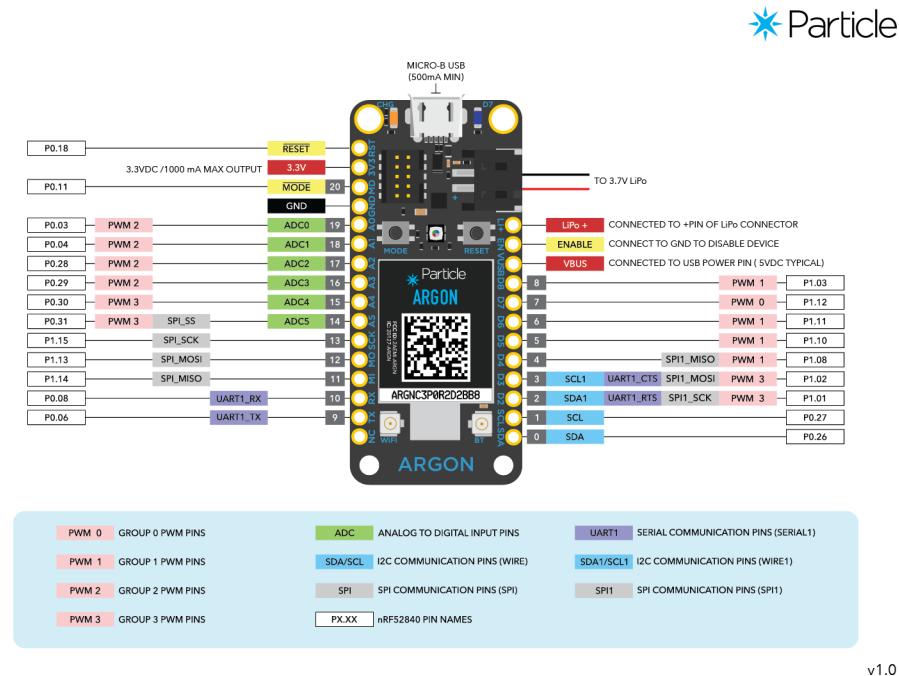

- 802.11 b/g/n (2.4 GHz), up to 150 Mbps
- Nordic Semiconductor nRF52840 SoC
 - ARM Cortex-M4F 32-bit processor @ 64MHz
 - 1MB flash, 256KB RAM
 - IEEE 802.15.4-2006 (e.g. Zigbee): 250 Kbps
 - Bluetooth 5: 2 Mbps, 1 Mbps, 500 Kbps, 125 Kbps
 - NFC-A tag
- On-board additional 4MB SPI flash
- 20 mixed signal GPIO (6 x Analog, 8 x PWM), UART, I2C, SPI
- Micro USB 2.0 full speed (12 Mbps)
- Integrated Li-Po charging and battery connector

- JTAG (SWD) Connector

6.2 Why Particle

The Particle Argon was selected as our next microcontroller because:

- Global reach with over 200,000 IoT professionals
- Edge-to-Cloud infrastructure
- Prototyping to Production with same code
- WI-FI, Bluetooth, and Cellular connectivity
- Secure Device OS
- Built in cloud communication
- Real-Time OS that works across all products

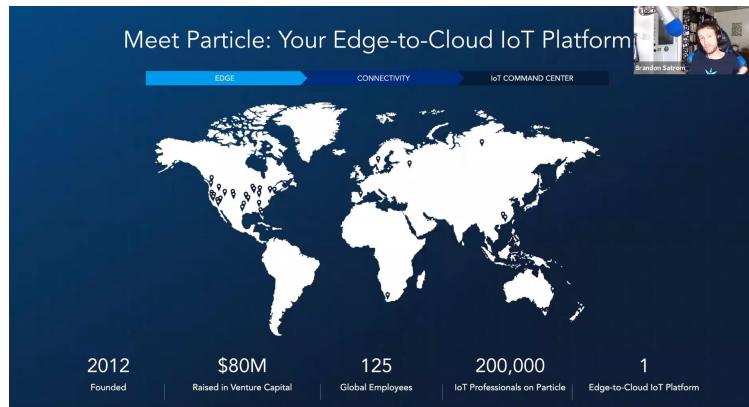


Figure 6.2: Particle's Global Reach

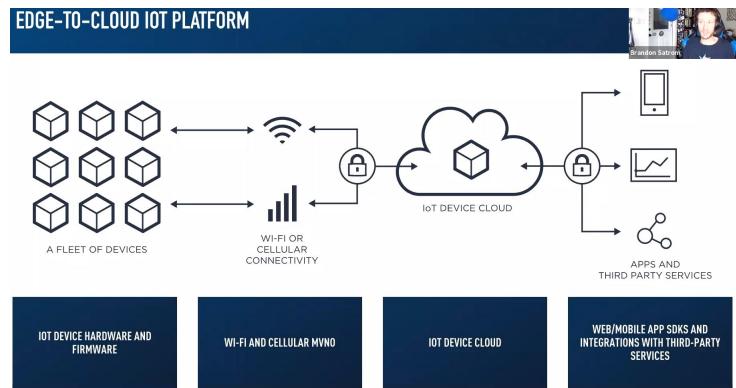


Figure 6.3: Edge to Cloud



Figure 6.4: Prototyping and Production

6.3 Virtual Lesson 6 Assignment

6.3.1 Coding

- Continue working on your Smart Room Controller

6.3.2 Fusion 360

We will continue to our Fusion 360 learning by completing the below tutorial.

How to 3D Model an iPhone X Phone Case - Learn Autodesk Fusion 360 in 30 Days: Day #10 at: https://www.youtube.com/watch?v=eW9IrA3i4w4&list=PLrZ2zK0tC_-B14uHmsx5pZVUpJKFif3lR&index=2&t=1s

6.3.3 Software for Particle Argon

Please do the following in the order below:

1. Create Particle login: <https://login.particle.io/signup>
2. Install Particle Command Line Interface. Download from <https://docs.particle.io/tutorials/developer-tools/cli/>. NOTE: you need to run this by right-clicking on it and selecting "Run As Administrator." Test that the Particle CLI installed correctly by going to PowerShell or Terminal and type particle. See Figure 6.5.
3. Download Particle Workbench / Visual Studio Code <https://docs.particle.io/quickstart/workbench/>. Select all default values during install. After it is installed, when you launch it, it may ask you to Install Dependencies, if so, select yes. See Figure 6.6.

```
PS C:\Users\IoT Instructor> particle
Welcome to the Particle Command line Interface!
Version 2.3.0
https://github.com/particle-iot/particle-cli

Usage: particle <command>
Help:  particle help <command>

Commands:
binary      Inspect binaries
call        Call a particular function on a device
cloud       Access Particle cloud functionality
compile    Compile a source file, or directory using the cloud compiler
config     Configure and switch between multiple accounts
device     Manipulate a device
doctor     Put your device back into a healthy state
flash      Send firmware to your device
function   Call functions on your device
get        Retrieve a value from your device
identify  Ask for and display device ID via serial
keys      Manage your device's key pair and server public key
library   Manage firmware libraries
list      Display a list of your devices, as well as their variables and functions
login     Login to the cloud and store an access token locally
logout   Log out of your session and clear your saved access token
```

Figure 6.5: Visual Studio Code

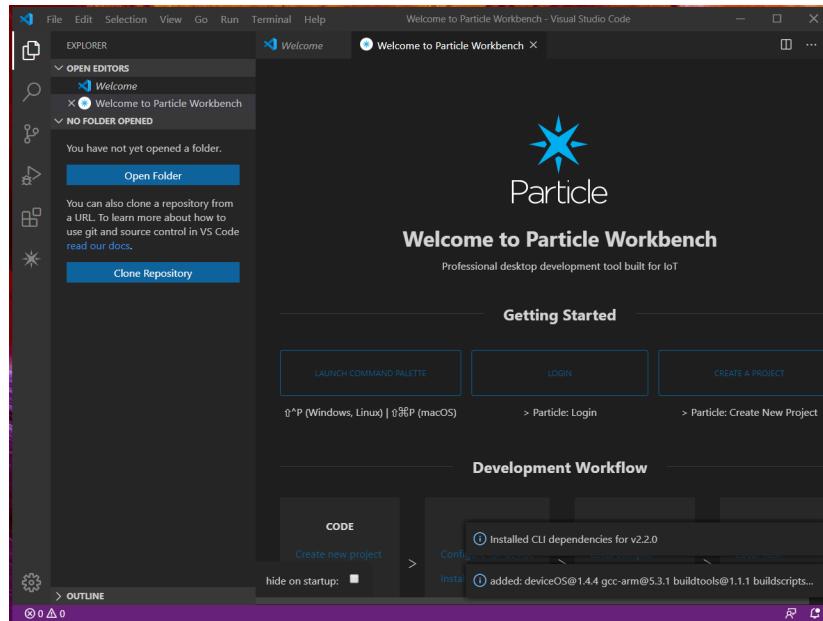


Figure 6.6: Visual Studio Code

Chapter 7

Virtual Lesson 7

7.1 Serial.Read() and Assignment

Today we are going to learn how to utilize the various Serial.Read() functions. We are going code an assignment where we get an input from the Serial Monitor three different ways. For the first one, you'll want to refer to V02_01_serialinput but remove the IF statements that differentiate integers from characters.

```
1 /*
2  * Project: SerialRead
3  * Description: More Practice Using Serial Inputs
4  * Author: <your name>
5  * Date: <today's date>
6 */
7
8 /*
9  * ASSIGNMENT
10 * Go to https://www.arduino.cc/reference/tr/language/
11 functions/communication/serial/
12 * Read the descriptions of:
13 *     read()
14 *     readString()
15 *     readStringUntil()
16 *     setTimeout()
```

```
17 * Using each of the three read functions, have the user
18 * enter their Name, Age, and Favorite Color
19 *
20 * To the Serial Monitor write out:
21 *     It is nice to meet you, <name>
22 *     Did you know you are <xxx> months old
23 *         (note:you need to convert years to months)
24 *     Wow, my favoite color is also <color>
25 *
26 * Remember: the enter key or send button returns a '\n'.
27 * When running this program, experiment with being slow
28 * to enter your string, as this will give you a feel
29 * for how setTimeout() works.
30 */
31
32
33
34 void setup() {
35     // put your setup code here, to run once:
36 }
37
38
39 void loop() {
40     // put your main code here, to run repeatedly:
41 }
42 }
```

7.2 Argon Set-Up

7.2.1 Particle IoT App

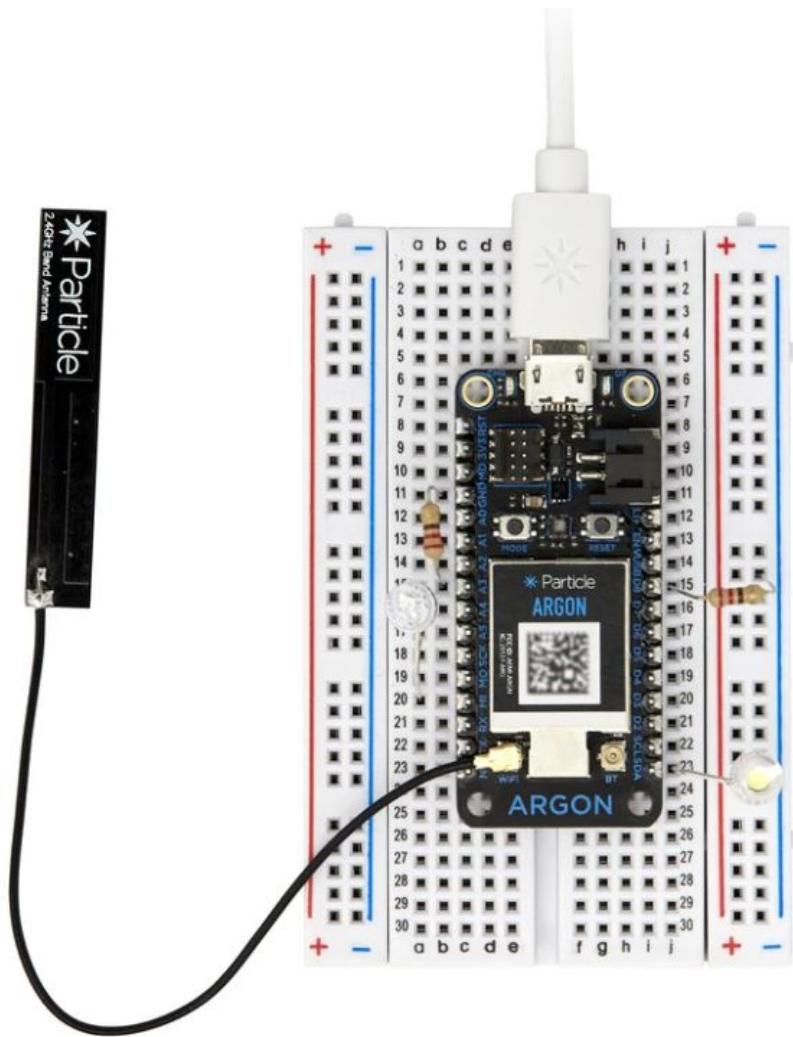


Figure 7.1: Particle Argon Setup

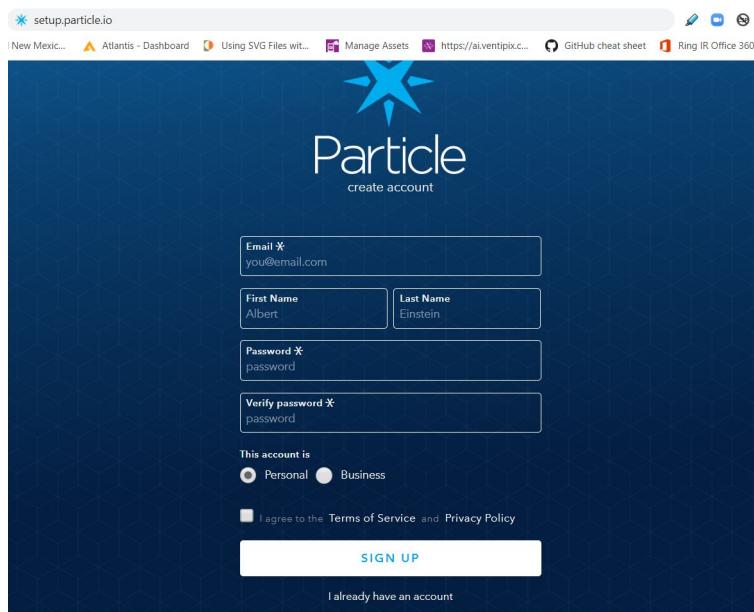


Figure 7.2: Particle Argon Setup

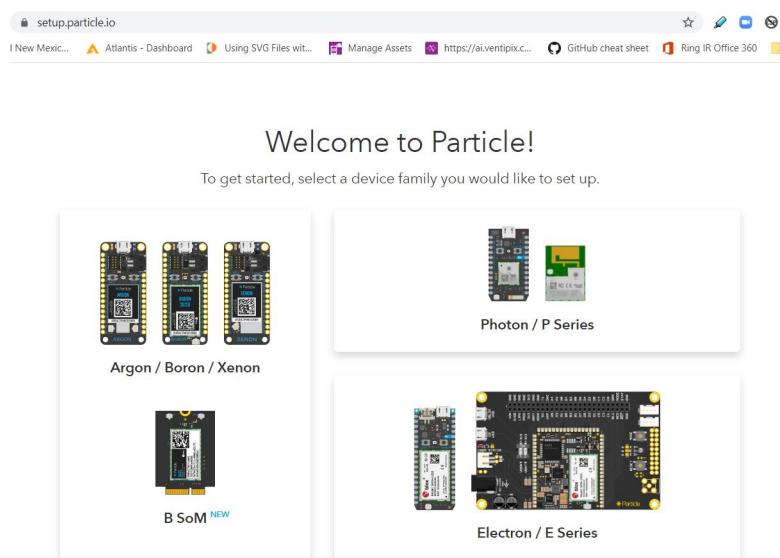


Figure 7.3: Particle Argon Setup

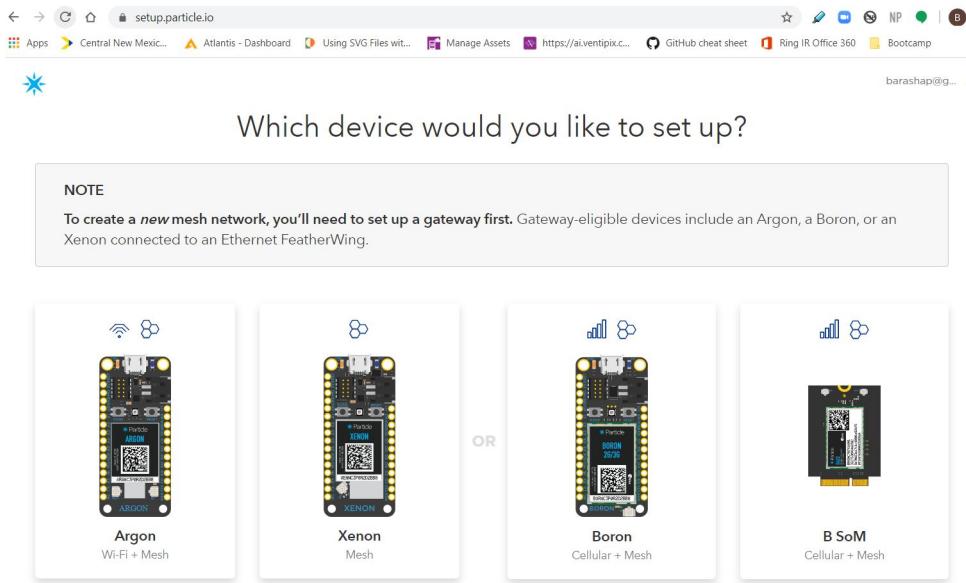


Figure 7.4: Particle Argon Setup

Great! Let's set up your **Argon**
Before going any further, make sure you have these things readily available:




NEXT

Figure 7.5: Particle Argon Setup

Continue setup in the Particle mobile app

Connect your device to the Device Cloud using the Particle iOS or Android mobile application

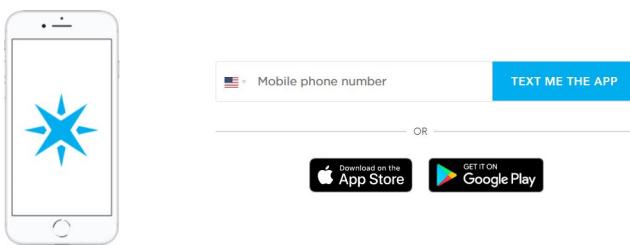

Already have the Particle mobile app? I'll [open the app myself](#).

Figure 7.6: Particle Argon Setup

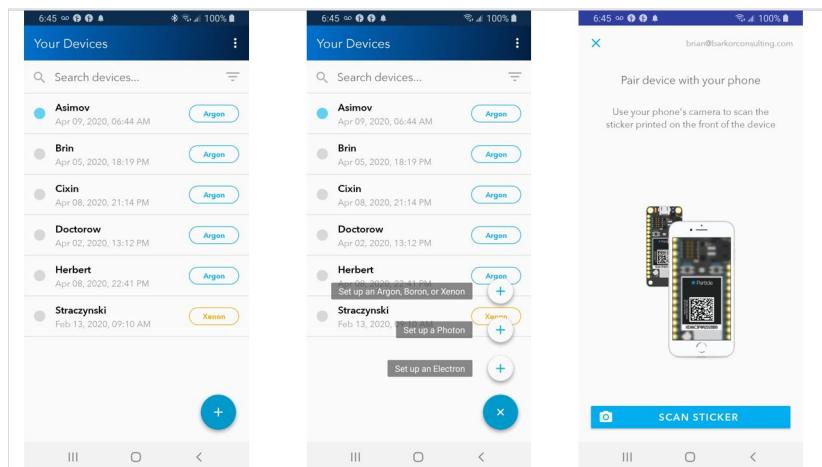


Figure 7.7: Particle Argon Setup

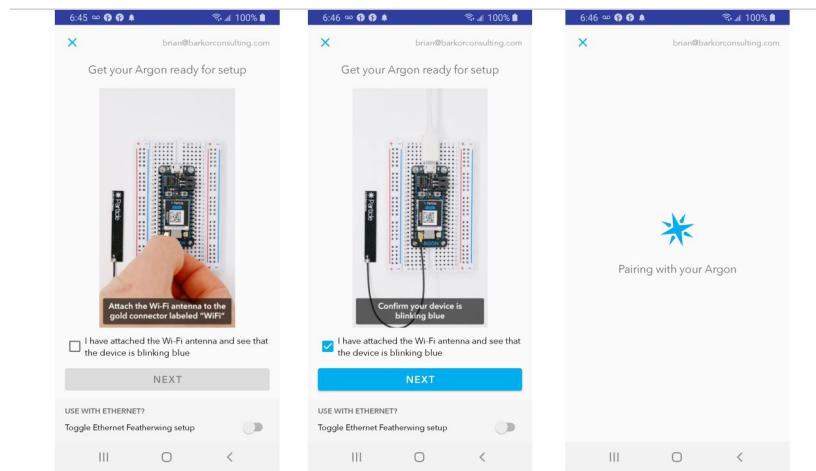


Figure 7.8: Particle Argon Setup

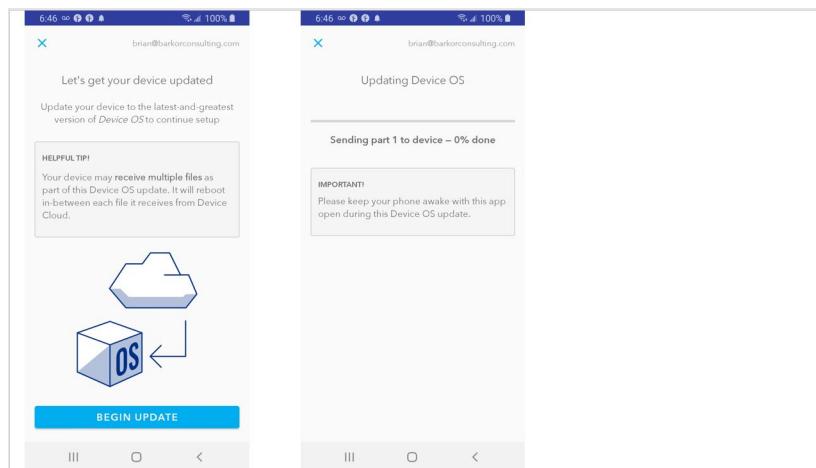


Figure 7.9: Particle Argon Setup

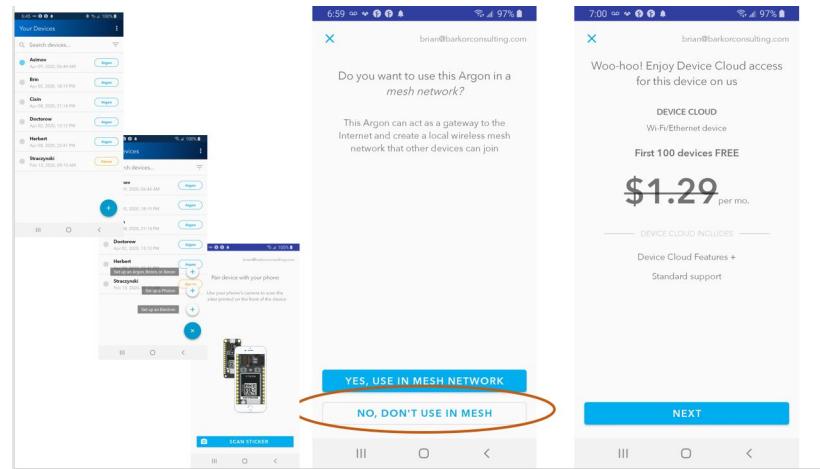


Figure 7.10: Particle Argon Setup

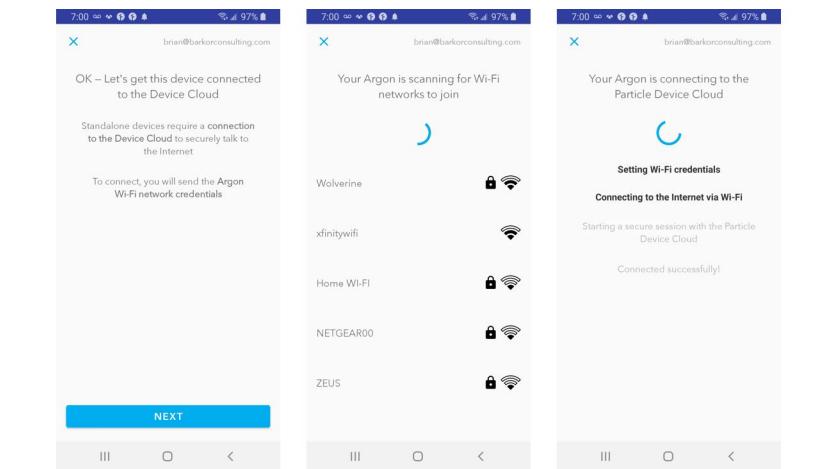


Figure 7.11: Particle Argon Setup

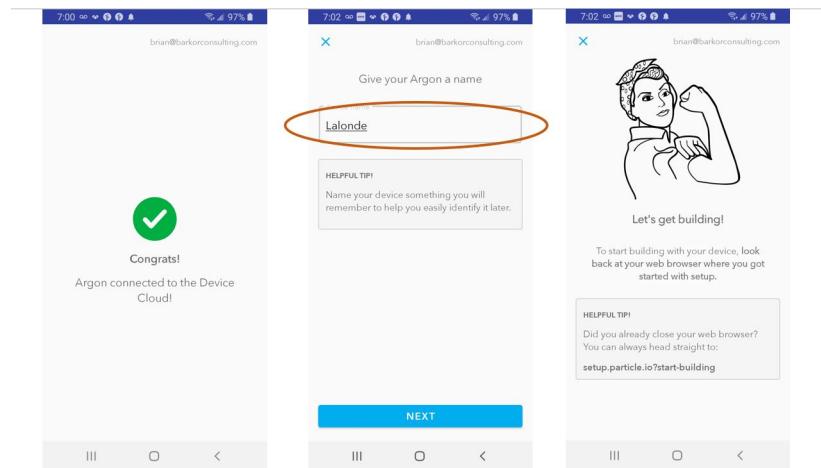


Figure 7.12: Particle Argon Setup

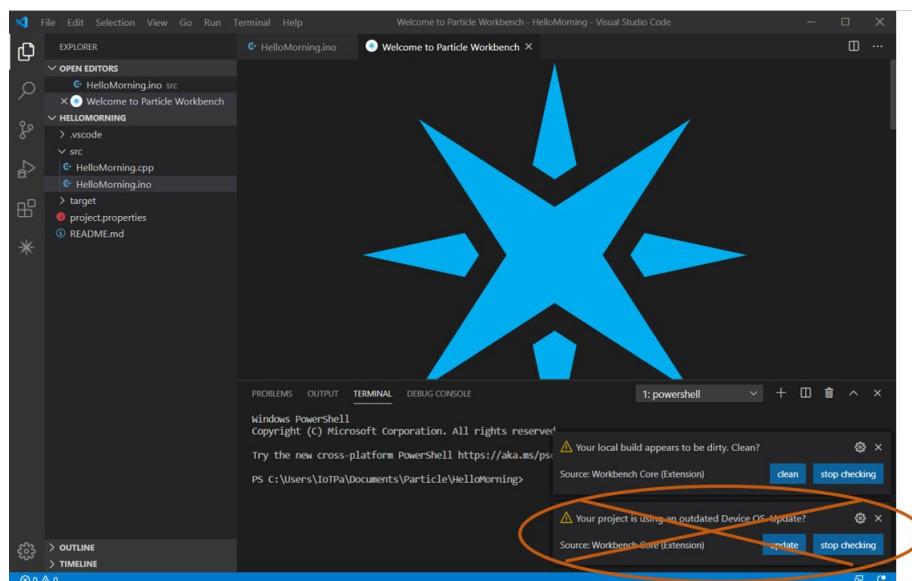


Figure 7.13: Particle Argon Setup

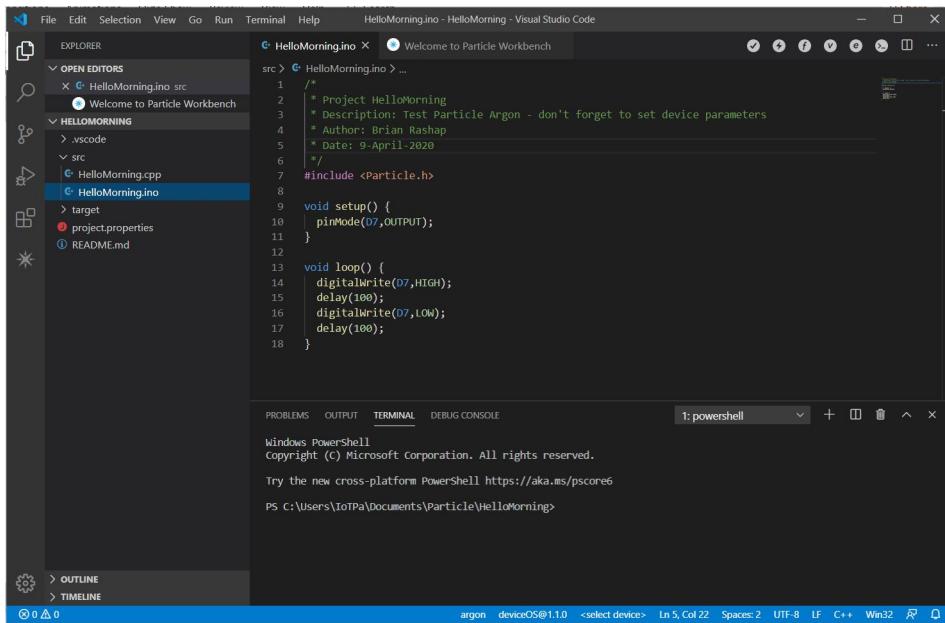


Figure 7.14: Particle Argon Setup

7.2.2 Particle CLI Setup

First, get your wifi credentials.

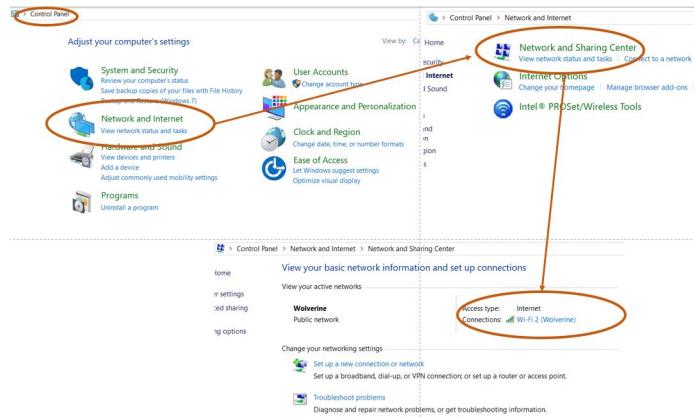


Figure 7.15: Particle Argon Setup

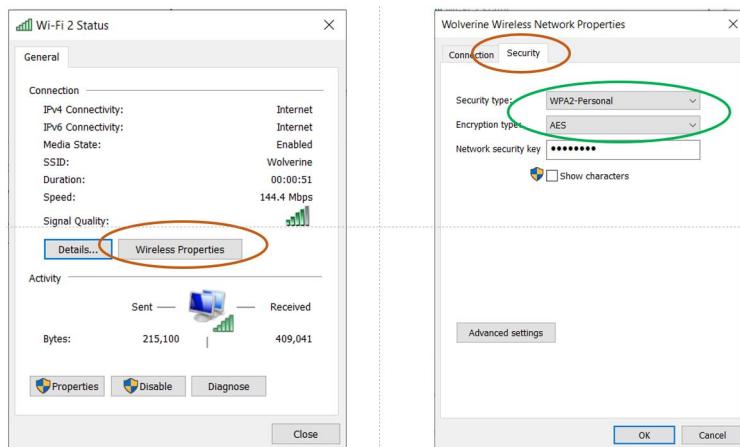


Figure 7.16: Particle Argon Setup

We will start by placing our Particle Argon onto our breadboard. Next, we will attach the WiFi antenna. And, then connect to your computer via the USB port. Check Device Manager – > Ports to see if your Argon is recognized. If not, then we will run Particle Setup through the Smartphone App. Start PowerShell or Terminal and execute the following instructions as shown in Figures 7.1 through 7.6.

1. particle login (Figure 7.1)

```
PS C:\Users\Particle> particle login
> Please enter your email address barashap@gmail.com
> Please enter your password [hidden]
> Successfully completed login!
```

Figure 7.17: Particle Argon Setup: particle serial identify

2. particle serial identify (Figure 7.2)

```
PS C:\Users\Particle> particle serial identify
Your device id is e00fce6873080a74a8599312
Your system firmware version is 1.1.0
```

Figure 7.18: Particle Argon Setup: particle serial identify

3. particle serial wifi (Figure 7.3)

```
PS C:\Users\Particle> particle serial wifi
> Should I scan for nearby Wi-Fi networks? Yes
> Select the Wi-Fi network with which you wish to connect your device: Wolverine
> Security Type WPA2
> Cipher Type AES+TKIP
> Wi-Fi Password GoBlue86
Done! Your device should now restart.
```

Figure 7.19: Particle Argon Setup: particle serial wifi

4. particle device add. You will use the device ID found with "particle serial identify" (Figure 7.4)

```
PS C:\Users\Particle> particle device add e00fce6873080a74a8599312
Claiming device e00fce6873080a74a8599312
Successfully claimed device e00fce6873080a74a8599312
```

Figure 7.20: Particle Argon Setup: particle device add

5. particle device rename. Again, you will use the device ID found earlier, and then provide your device with a unique name (Figure 7.5)

```
PS C:\Users\Particle> particle device rename e00fce6873080a74a8599312 Herbert
Renaming device e00fce6873080a74a8599312
Successfully renamed device e00fce6873080a74a8599312 to: Herbert
PS C:\Users\Particle>
```

Figure 7.21: Particle Argon Setup: particle device rename

6. particle list. We will validate that our device is setup by execution both particle serial list and particle list (Figure 7.6)

```
PS C:\Users\Particle> particle serial list
Found 1 device connected via serial:
COM9 - Argon - e00fce6873080a74a8599312
PS C:\Users\Particle> particle list
Cixin [e00fce68a3464adbfd1add3] (Argon) is online
Doctorow [e00fce687365c8dfdc103df8] (Argon) is offline
Asimov [e00fce68e5be047f5f12bcec] (Argon) is online
    variables:
        temp (double)
Brin [e00fce68be19b0df2ece5a7f] (Argon) is offline
Herbert [e00fce6873080a74a8599312] (Argon) is online
    Functions:
        int digitalread(String args)
        int digitalWrite(String args)
        int analogread(String args)
        int analogwrite(String args)
Straczynski [e00fce68cac1954a305932cd] (Xenon) is offline
```

Figure 7.22: Particle Argon Setup: particle serial list

7.3 Particle Not Connecting to Cloud

```
PS C:\Users\Particle> particle flash --usb tinker
    ||| I was unable to detect any devices in DFU mode...
    > Your device will blink yellow when in DFU mode.
    > If your device is not blinking yellow, please:
        1) Press and hold both the RESET/RST and MODE/SETUP buttons simultaneously.
        2) Release only the RESET/RST button while continuing to hold the MODE/SETUP button.
        3) Release the MODE/SETUP button once the device begins to blink yellow.

    Error writing Firmware: No DFU device found
PS C:\Users\Particle> particle flash --usb tinker

Flash success!
PS C:\Users\Particle> particle serial wifi
? Should I scan for nearby Wi-Fi networks? Yes
? SSID Wolverine
? Security Type WPA2
? Cipher Type AES+TKIP
? Wi-Fi Password GoBlue86
Done! Your device should now restart.
```

Figure 7.23: Particle Argon Setup: particle flash

Chapter 8

Virtual Lesson 8

8.1 Command Palette

The Command Palette will become a familiar part of the user interface that is used during the rest of this bootcamp. As the name implies, the Command Palette provides access to many commands such as open files, search for symbols, and see a quick outline of a file, all using the same interactive window. It can be invoked via cmd+shift+p on macOS or ctrl+shift+p on Linux and Windows.

Workbench adds custom Particle commands to the palette. Start typing Particle to see all the currently available commands. A sample list is seen in Figure 8.1.

8.2 Formatted Printing

C/C++ gives us the capability of embedding variables in print strings. Rather than having to write multiple Serial.print() and Serial.println() commands, we can combine text and variables by using Serial.printf() and Serial.printlnf(). The same methods can be used in our libraries, such as Adafruit_SSD1306.

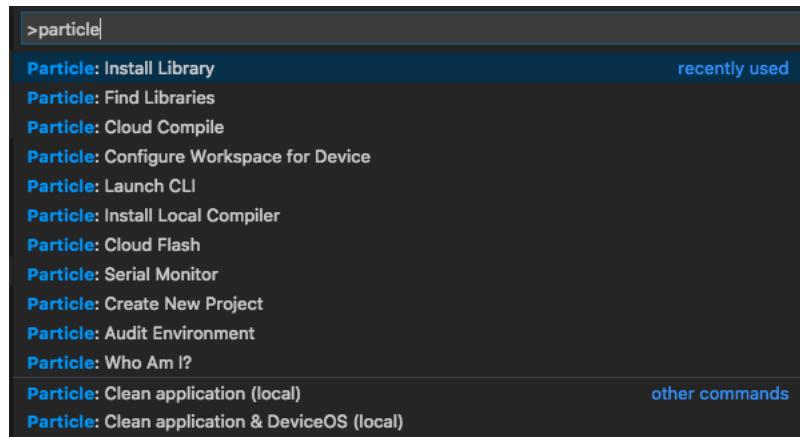


Figure 8.1: Visual Studio Code Command Palette

For example, `display.printf()`. The list of specifiers can be found in Figure 8.2.

specifier	Output	Example
d or i	Signed decimal integer	392
u	Unsigned decimal integer	7235
o	Unsigned octal	610
x	Unsigned hexadecimal integer	7fa
X	Unsigned hexadecimal integer (uppercase)	7FA
f	Decimal floating point, lowercase	392.65
F	Decimal floating point, uppercase	392.65
e	Scientific notation (mantissa/exponent), lowercase	3.9265e+2
E	Scientific notation (mantissa/exponent), uppercase	3.9265E+2
g	Use the shortest representation: %e or %f	392.65
G	Use the shortest representation: %E or %F	392.65
a	Hexadecimal floating point, lowercase	-0xc.90fep-2
A	Hexadecimal floating point, uppercase	-0XC.90FEP-2
c	Character	a
s	String of characters	sample
p	Pointer address	b8000000
n	Nothing printed. The corresponding argument must be a pointer to a signed int. The number of characters written so far is stored in the pointed location.	
%	A % followed by another % character will write a single % to the stream.	%

Figure 8.2: Formatted Printing

We can revisit our HelloParticle code with both the Serial Monitor and using formatted printing. In the below code, you'll notice that we start the Serial Monitor the same way as always. Line 12: `Serial.begin(9600)`. When we Flash or code to the Argon, we'll then use invoke Particle:Serial Monitor by using cmd+shift+p on macOS or ctrl+shift+p on Linux and Windows. In our code, starting on Line 25, we can practice using `printf()` and `println()`. Notice, the \n can be used to include a carriage returning in the print string.

```
1 /*
2  * Project HelloParticle
3  * Description: Hello World with Particle Argon,
4  * with some Serial.printf learning
5  * Author: Brian Rashap
6  * Date: 09-APR-2020
7 */
8 int i;
9 int ledDelay = 750;
10 int ledPin = D7;
11 float pивalue = 3.141592653589;
12 void setup() {
13     Serial.begin(9600);
14     pinMode(D7,OUTPUT);
15     Serial.println("Hello World - Ready to Blink");
16 }
17 void loop() {
18     for(i=0;i<20;i++) {
19         Serial.println("Turning LED on");
20         digitalWrite(ledPin,HIGH);
21         delay(ledDelay);
22         Serial.println("Turning LED off");
23         digitalWrite(ledPin,LOW);
24         delay(ledDelay);
25     }
26 // Print Formatted Data - %i = int, %s = string, %f = float
27     Serial.printf("The delay is %i milliseconds \n",ledDelay);
28     Serial.printf("Values of %s = %.2f or %.4f or %.1.6f ","
29     PI",pивalue, pивalue, pивalue);
30     Serial.printf("The Moon is %.1.3E meters away",
31     238855*1609.334);
32     delay(10*ledDelay);
33 }
```

8.3 Virtual Lesson 8 Assignment

8.3.1 Particle inputs and outputs

In Fritzing, create a breadboard layout to match this schematic. You will need to find the Particle Argon fritzing part online. When you search for it, you should find a github repository that you can clone. In PowerShell or Terminal, go to your Documents\Fritizing directory and clone the repository, and then import the part. Using the parts in your Particle Argon Development Kit, wire up this diagram on with your Argon.

- The anode of the photodiode is connected to Pin A0. Note, unlike an LED, the cathode (short pin) of the photodiode is connected to 3.3V.
- The anode (long pin) of the LED is connected to Pin D4 (which is a PWM pin on the Argon).


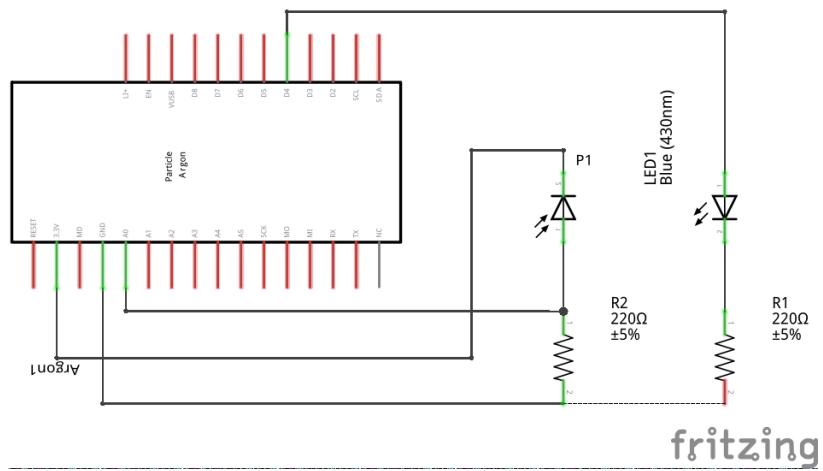


Figure 8.3: Hello Particle Schematic

Thought Pin D4 is labeled as a Digital Pin, you'll notice on the Particluar Pin Layout that it is also a PWM Pin, which allows you to use it for `analogWrite()`.

Figure 8.4: Particle Argon Pin Layout

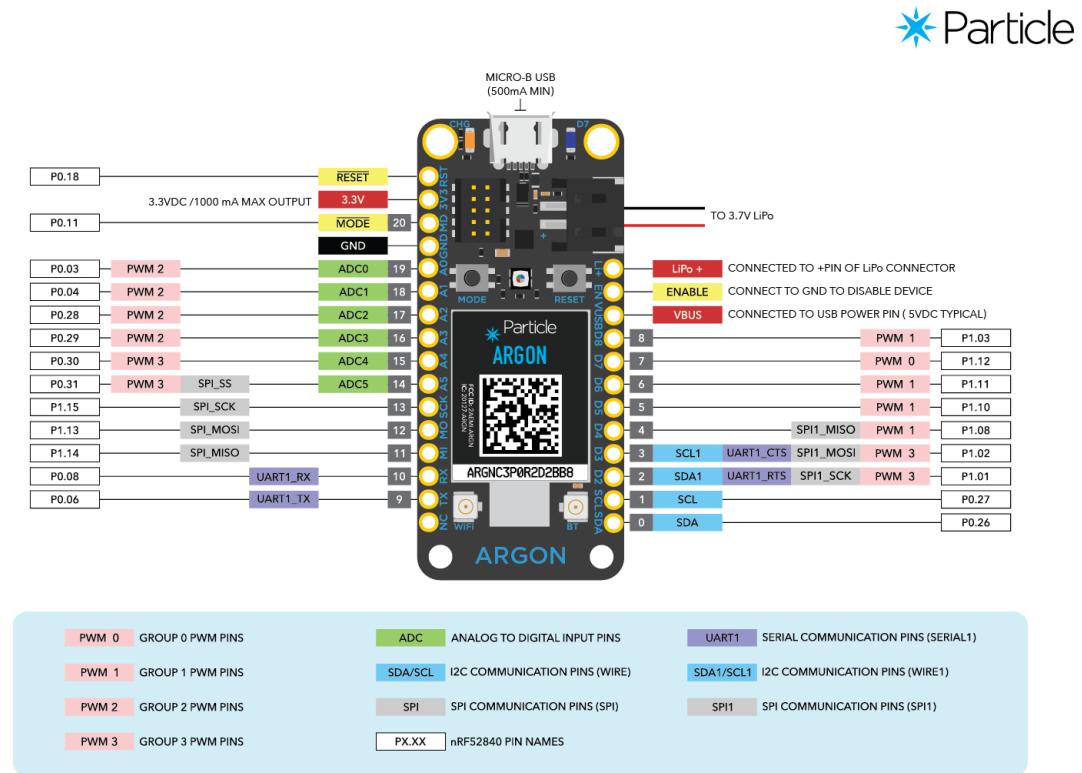

v1.0

For your first code with the Particle Argon. On Monday, I will be giving you a repository to place this code. For now, you can place it in Documents\<Your Name>\Particle.

1. Read the photodiode voltage as an analog input. Experiment with seeing what values you get with various light conditions - ambient light, covered with your hand, with your cellphone shining on it, etc.
2. Utilize formatted printing in this assignment to display the inputs from the photodiode and to tell the user the status of the LED.
3. From your measurements, try to determine how many bits of resolution

the Argon's analog input pins have. Then, connect an analog input directly to 3.3V and see if you are correct.

4. Use a digital output to turn on the LED if your hand is covering you photodiode and turn off if it is uncovered. You'll need to set a threshold based on your experiments in #1.
5. Now, have your LED brightness vary with the amount of light that your photodiode sees. Note, *analogWrite()* on the Argon by default is 8-bits, so you'll need to convert based on the resolution of the *analogRead()* found in #1.
6. Utilize formatted printing in this assignment to display the inputs from the photodiode and to tell the user the status of the LED.

8.3.2 Fusion 360

For our final Fusion 360 tutorial, we will be learning how to make a snap case for a Raspberry PI controller. Tanda is in the process of creating a Argon-based 3D model, and in two weeks you will be getting an assignment to make your own case using what you learn in this tutorial.

Fusion 360 Snap Fit Cases — 3D-Printable Raspberry Pi Case: <https://www.youtube.com/watch?v=E0NVC8xhf3I>

Additional information can be found at: <https://productdesignonline.com/fusion-360-tutorials/fusion-360-snap-fit-cases-3d-printable-raspberry-pi-case>

8.3.3 Smart Room Controller and Simon®

We will slowly introduce new topics for the Particle Argon controller next week. However, you need to continue to work on your last two Teensy projects, with priority for the second one.

- The Simon® Game

- The Smart Room Controller

The smart room controller is considered your midterm project, when we get back into the classroom, you will be showing off it's functionality for your classmates.

Appendix A

Functions

Segmenting code into functions allows a programmer to create modular pieces of code that perform a defined task and then return to the area of code from which the function was "called". The typical case for creating a function is when one needs to perform the same action multiple times in a program.

Anatomy of a C function

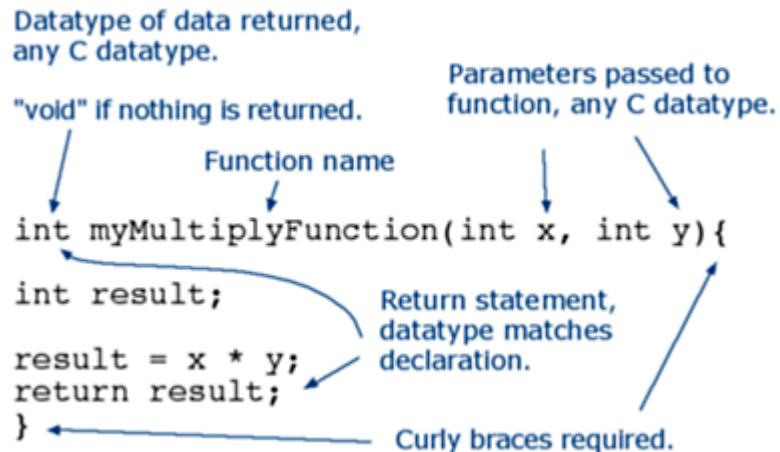


Figure A.1: Anatomy of a C function

Standardizing code fragments into functions has several advantages:

- Functions help the programmer stay organized. Often this helps to conceptualize the program.
- Functions codify one action in one place so that the function only has to be thought out and debugged once.
- This also reduces chances for errors in modification, if the code needs to be changed.
- Functions make the whole sketch smaller and more compact because sections of code are reused many times.
- They make it easier to reuse code in other programs by making it more modular, and as a nice side effect, using functions also often makes the code more readable.
- There are two required functions in an Arduino sketch, `setup()` and `loop()`. Other functions must be created outside the brackets of those two functions. As an example, we will create a simple function to multiply two numbers.

There are two required functions in an Arduino sketch, `setup()` and `loop()`. Other functions must be created outside the brackets of those two functions. As an example, we will create a simple function to multiply two numbers.

In Code Listing A.1, we create a function that needs to be declared outside any other function, so `"myMultiplyFunction()"` can go either above or below the `"loop()"` function.

To "call" our simple multiply function, we pass it parameters of the datatype that it is expecting. In our case `k = myMultiplyFunction(i, j);`

This function will read a sensor five times with `analogRead()` and calculate the average of five readings. It then scales the data to 8 bits (0-255), and inverts it, returning the inverted result. As you can see, even if a function does not have parameters and no returns is expected `"("` and `")"` brackets plus `";"` must be given.

```
1 void setup(){
2     Serial.begin(9600);
3 }
4
5 void loop() {
6     int i = 2;
7     int j = 3;
8     int k;
9
10    k = myMultiplyFunction(i, j); // k now contains 6
11    Serial.println(k);
12    delay(500);
13 }
14
15 int myMultiplyFunction(int x, int y){
16     int result;
17     result = x * y;
18     return result;
19 }
```

Code Listing A.1: Arduinio Functions

As you recall, we used a Function to convert from bits to voltage in our analog_read code that we wrote the first week. A version of this code can be found in Code Listing A.2.

```
1 /*  
2  * Project: Analog_Input  
3  * Description: Introduce Analog Read  
4  * Author: Brian A Rashap  
5  * Date: 11-Dec-2019  
6 */  
7  
8 // Connect the rotary resistor and another resistor in Series  
9 // Connect the middle of these two resistors to Pin 14  
10  
11 int inPin = 14;  
12 int inputDelay = 3000;  
13 int inVal;  
14 float voltage;  
15  
16 void setup() {  
17     // put your setup code here, to run once:  
18     Serial.begin(9600);  
19     while(!Serial);  
20  
21     pinMode(inPin, INPUT);  
22 }  
23  
24 void loop() {  
25     inVal = analogRead(inPin);  
26     Serial.println(inVal);  
27     voltage = bits2volts(inVal);  
28     Serial.println(voltage);  
29     delay(inputDelay);  
30 }  
31  
32 float bits2volts(int bitVal) {  
33     float voltVal;  
34     voltVal = bitVal*(3.3/1028);  
35     return voltVal;  
36 }
```

Code Listing A.2: Example Functions

Appendix B

Number Systems used by computers

B.1 Bases

Number systems are the methods we use to represent numbers. Since grade school, we've all been mostly operating within the comfy confines of a base-10 number system, but there are many others. Base-2, base-8, base-16, base-20, base...you get the point. There are an infinite variety of base-number systems out there, but only a few are especially important to electrical engineering.

The really popular number systems even have their own name. Base-10, for example, is commonly referred to as the decimal number system. Base-2, which we're here to talk about today, also goes by the moniker of binary. Another popular numeral system, base-16, is called hexadecimal.

The base of a number is often represented by a subscripted integer trailing a value. So in the introduction above, the first image would actually be 10010 somethings while the second image would be 100_2 somethings. This is a handy way to specify a number's base when there's ever any possibility of ambiguity.

B.2 Binary

Why binary you ask? Well, why decimal? We've been using decimal forever and have mostly taken for granted the reason we settled on the base-10 number system for our everyday number needs. Maybe it's because we have 10 fingers, or maybe it's just because the Romans forced it upon their ancient subjugates. Regardless of what lead to it, tricks we've learned along the way have solidified base-10's place in our heart; everyone can count by 10's. We even round large numbers to the nearest multiple of 10. We're obsessed with 10!

Computers and electronics are rather limited in the finger-and-toe department. At the lowest level, they really only have two ways to represent the state of anything: ON or OFF, high or low, 1 or 0. And so, almost all electronics rely on a base-2 number system to store, manipulate, and math numbers.

The heavy reliance electronics place on binary numbers means it's important to know how the base-2 number system works. You'll commonly encounter binary, or its cousins, like hexadecimal, all over computer programs. Analysis of Digital logic circuits and other very low-level electronics also requires heavy use of binary.

In this tutorial, you'll find that anything you can do to a decimal number can also be done to a binary number. Some operations may be even easier to do on a binary number (though others can be more painful).

B.3 Binary: Counting and Converting

The base of each number system is also called the radix. The radix of a decimal number is ten, and the radix of binary is two. The radix determines how many different symbols are required in order to flesh out a number system. In our decimal number system we've got 10 numeral representations for values between nothing and ten somethings: 0, 1, 2, 3, 4, 5, 6, 7, 8, and 9. Each of those symbols represents a very specific, standardized value.

In binary we're only allowed two symbols: 0 and 1. But using those two symbols we can create any number that a decimal system can.

Counting in binary You can count in decimal endlessly, even in your sleep, but how would you count in binary? Zero and one in base-two should look pretty familiar: 0 and 1. From there things get decidedly binary.

Remember that we've only got those two digits, so as we do in decimal, when we run out of symbols we've got to shift one column to the left, add a 1, and turn all of the digits to right to 0. So after 1 we get 10, then 11, then 100. Let's start counting...

Dec	Bin	Dec	Bin
0	0	16	10000
1	1	17	10001
2	10	18	10010
3	11	19	10011
4	100	20	10100
5	101	21	10101
6	110	22	10110
7	111	23	10111
8	1000	24	11000
9	1001	25	11001
10	1010	26	11010
11	1011	27	11011
12	1100	28	11100
13	1101	29	11101
14	1110	30	11110
15	1111	31	11111

Table B.1: Decimal to Binary Conversion

B.4 Converting from DEC to BIN

There's a handy function we can use to convert any binary number to decimal:

Binary to decimal conversion equation There are four important elements to that equation:

$$a_n 2^n + a_{n-1} 2^{n-1} + \dots + a_1 2^1 + a_0 2^0$$

There are four important elements to that equation:

- a_n, a_{n-1}, a_1 , etc., are the digits of a number. These are the 0's and 1's you're familiar with, but in binary they can only be 0 or 1.
- The position of a digit is also important to observe. The position starts at 0, on the right-most digit; this 1 or 0 is the least-significant. Every digit you move to the left increases in significance, and also increases the position by 1.
- The length of a binary number is given by the value of n, actually it's $n+1$. For example, a binary number like 101 has a length of 3, something larger, like 10011110 has a length of 8.
- Each digit is multiplied by a weight: the $2^n, 2^{n-1}, 2^1$, etc. The right-most weight - 2^0 equates to 1, move one digit to the left and the weight becomes 2, then 4, 8, 16, 32, 64, 128, 256,... and on and on. Powers of two are of great importance to binary, they quickly become very familiar.

B.5 Bits, Nibbles, and Bytes

In discussing the make of a binary number, we briefly covered the length of the number. The length of a binary number is the amount of 1's and 0's it has.

Common binary number lengths Binary values are often grouped into a common length of 1's and 0's, this number of digits is called the length of a number. Common bit-lengths of binary numbers include bits, nibbles, and bytes (hungry yet?). Each 1 or 0 in a binary number is called a bit. From there, a group of 4 bits is called a nibble, and 8-bits makes a byte.

Bytes are a pretty common buzzword when working in binary. Processors are all built to work with a set length of bits, which is usually this length is a multiple of a byte: 8, 16, 32, 64, etc.

Length	Name	Example
1	Bit	0
4	Nibble	1011
8	Byte	10110101

Table B.2: Bits, Nibbles, and Bytes

Word is another length buzzword that gets thrown out from time-to-time. Word is much less yummy sounding and much more ambiguous. The length of a word is usually dependent on the architecture of a processor. It could be 16-bits, 32, 64, or even more.

B.6 Hexadecimal Basics

Hexadecimal – also known as hex or base 16 – is a system we can use to write and share numerical values. In that way it's no different than the most famous of numeral systems (the one we use every day): decimal. Decimal is a base 10 number system (perfect for beings with 10 fingers), and it uses a collection of 10 unique digits, which can be combined to positionally represent numbers.

Hex, like decimal, combines a set of digits to create large numbers. It just so happens that hex uses a set of 16 unique digits. Hex uses the standard 0-9, but it also incorporates six digits you wouldn't usually expect to see creating numbers: A, B, C, D, E, and F.

Hex, along with decimal and binary, is one of the most commonly encountered numeral systems in the world of electronics and programming. It's important to understand how hex works, because, in many cases, it makes more sense to represent a number in base 16 than with binary or decimal.

B.7 Counting in HEX

Counting in hex is a lot like counting in decimal, except there are six more digits to deal with. Once a digit place becomes greater than "F", you roll that place over to "0", and increment the digit to the left by 1.

DEC	HEX	DEC	HEX	DEC	HEX	DEC	HEX
0	0	8	8	16	10	24	8
1	1	9	9	17	11	25	19
2	2	10	A	18	12	26	1A
3	3	11	B	19	13	27	1B
4	4	12	C	20	14	28	1C
5	5	13	D	21	15	29	1D
6	6	14	E	22	16	30	1E
7	7	15	F	23	17	31	1F

Table B.3: Convert Decimal to Hexidecimal

B.8 HEX identifiers

"BEEF, it's what's for dinner". Am I channelling my inner Sam Elliott (McConaughey?), or expressing my hunger for the decimal number 48879? To avoid confusing situations like that, you'll usually see a hexadecimal number prefixed (or suffixed) with one of these identifiers:

There are a variety of other prefixes and suffixes that are specific to certain programming languages. Assembly languages, for example, might use an "H" or "h" suffix (e.g. 7Fh) or a *"prefix(6AD)"*. Consult examples if you're not sure which prefix or suffix to use with your programming language.

The "0x" prefix is one you'll see a lot, especially if you're doing any Arduino programming. We'll use that from now on in this tutorial.

In summary: DECAF? A horrible abomination of coffee. 0xDECAF? A perfectly acceptable, 5-digit hexadecimal number.

Identifier	Example	Notes
0x	0x47DE	This prefix shows up a lot in UNIX C-based programming languages
#	#FF7734	Color references in HTML and image editing programs
%	%20	Often used in URLs to express characters like "Space" (%20)
\x	\xA	Often used to express character control codes like "Backspace" (\x08), "Escape" (\x1B), and "Line Feed" (\xA)
&#x	©	Used in HTML, XML, and XHTML to express unicode characters (e.g. © prints an Ω).
0h	0h5E	A prefix used by many programmable graphic calculators (e.g. TI-89).
Numerical / Text Subscript	BE3716, 13Fhex	This is more of a mathematical representation of base 16 numbers. Decimal numbers can be represented with a subscript 10 (base 10). Binary is base 2.

Table B.4: Hex Identifiers

B.9 Converting Hex to Decimal

There's an ugly equation that rules over hex-to-decimal conversion:

$$h_n 16^n + h_{n-1} 16^{n-1} + \cdots + h_1 16^1 + h_0 16^0$$

There are a few important elements to this equation. Each of the h factors (h_n , h_{n-1}) is a single digit of the hex value. If our hex value is 0xF00D, for example, h_0 is D, h_1 and h_2 are 0, and h_3 is F.

Powers of 16 are a critical part of hexadecimal. More-significant digits (those towards the left side of the number) are multiplied by larger powers of 16. The least-significant digit, h_0 , is multiplied by 16⁰ (1). If a hex value is four digits long, the most-significant digit is multiplied by 16³, or 4096.

To convert a hexadecimal number to decimal, you need to plug in values for each of the h factors in the equation above. Then multiply each digit by its respective power of 16, and add each product up. Our step-by-step approach is:

1. Start with the right-most digit of your hex value. Multiply it by 16⁰, that is: multiply by 1. In other words, leave it be, but keep that value off to the side.¹
2. Move one digit to the left. Multiply that digit by 16¹ (i.e. multiply by 16). Remember that product, and keep it to the side.
3. Move another digit left. Multiply that digit by 16² (256) and store that product.
4. Continue multiplying each incremental digit of the hex value by increasing powers of 16 (4096, 65536, 1048576, ...), and remember each product.
5. Once you've multiplied each digit of the hex value by the proper power of 16, add them all up. That sum is the decimal equivalent of your hex value.

¹Remember to convert alphabetic hex values (A, B, C, D, E, and F) to their decimal equivalent (10, 11, 12, 13, 14, and 15)

Appendix C

GITHUB

C.1 Cloning an existing repository

Use this to get a repository that already exists and pull it to your local machine. Go the directory where you want to place the repository and:

```
1 git clone <URL of repository>
2
```

C.2 Getting the latest updates

To get the latest updates from the repository:

```
1 git pull
2
```

C.3 Placing your edits into the repository

To get the latest updates from the respository:

```
1 git add .
2 git commit -m "<comment about what you are adding>"
3 git push
4
```

Appendix D

Lineage of Programming Languages


D.1 FORTRAN

Fortran; formerly FORTRAN, derived from Formula Translation[2]) is a general-purpose, compiled imperative programming language that is especially suited to numeric computation and scientific computing.

Originally developed by IBM[3] in the 1950s for scientific and engineering applications, FORTRAN came to dominate this area of programming early on and has been in continuous use for over six decades in computationally intensive areas such as numerical weather prediction, finite element analysis, computational fluid dynamics, computational physics, crystallography and computational chemistry. It is a popular language for high-performance computing[4] and is used for programs that benchmark and rank the world's fastest supercomputers.[5][6]

Fortran encompasses a lineage of versions, each of which evolved to add extensions to the language while usually retaining compatibility with prior versions. Successive versions have added support for structured programming and processing of character-based data (FORTRAN 77), array programming, modular programming and generic programming (Fortran 90), high perfor-

Figure D.1: Program Language Lineage

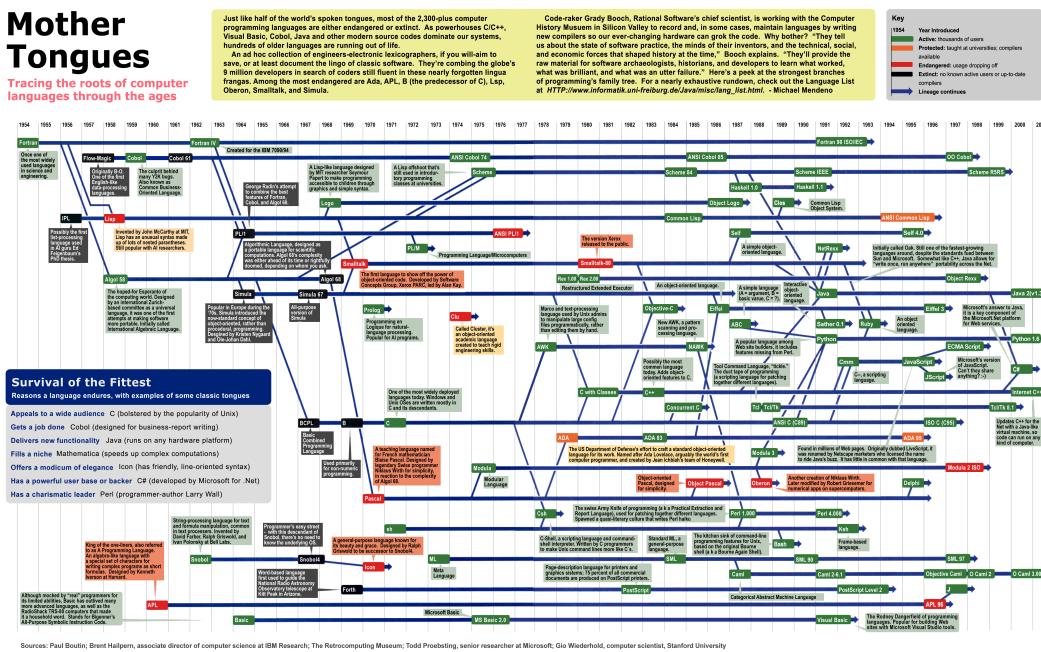

mance Fortran (Fortran 95), object-oriented programming (Fortran 2003), concurrent programming (Fortran 2008), and native parallel computing capabilities (Coarray Fortran 2008/2018).

Fortran's design was the basis for many other programming languages. Among the better known is BASIC, which is based on FORTRAN II with a number of syntax cleanups, notably better logical structures,[7] and other changes to work more easily in an interactive environment.[8]

D.2 ALGOL

ALGOL 58, originally named IAL, is one of the family of ALGOL computer programming languages. It was an early compromise design soon superseded by ALGOL 60. According to John Backus[2]

"The Zurich ACM-GAMM Conference had two principal motives in proposing the IAL: (a) To provide a means of communicating numerical methods and other procedures between people, and (b) To provide a means of realizing a stated process on a variety of machines..."

ALGOL 58 introduced the fundamental notion of the compound statement, but it was restricted to control flow only, and it was not tied to identifier scope in the way that Algol 60's blocks were.

ALGOL 60 (short for Algorithmic Language 1960) is a member of the ALGOL family of computer programming languages. It followed on from ALGOL 58 which had introduced code blocks and the begin and end pairs for delimiting them. ALGOL 60 was the first language implementing nested function definitions with lexical scope. It gave rise to many other programming languages, including CPL, Simula, BCPL, B, Pascal, and C.

Niklaus Wirth based his own ALGOL W on ALGOL 60 before moving to develop Pascal. Algol-W was intended to be the next generation ALGOL but the ALGOL 68 committee decided on a design that was more complex and advanced rather than a cleaned simplified ALGOL 60. The official ALGOL versions are named after the year they were first published. Algol 68 is substantially different from Algol 60 and was criticised partially for being so, so that in general "Algol" refers to dialects of Algol 60.

D.3 CPL

CPL (Combined Programming Language) is a multi-paradigm programming language, that was developed in the early 1960s. It is an early ancestor of the C language via the BCPL and B languages.

D.4 BCPL

BCPL ("Basic Combined Programming Language") is a procedural, imperative, and structured computer programming language. Originally intended

for writing compilers for other languages, BCPL is no longer in common use. However, its influence is still felt because a stripped down and syntactically changed version of BCPL, called B, was the language on which the C programming language was based. BCPL introduced several features of many modern programming languages, including using curly braces to delimit code blocks.[3] BCPL was first implemented by Martin Richards of the University of Cambridge in 1967.

D.5 B

B is a programming language developed at Bell Labs circa 1969. It is the work of Ken Thompson with Dennis Ritchie.

B was derived from BCPL, and its name may be a contraction of BCPL. Thompson's coworker Dennis Ritchie speculated that the name might be based on Bon, an earlier, but unrelated, programming language that Thompson designed for use on Multics.

B was designed for recursive, non-numeric, machine-independent applications, such as system and language software.[3] It was a typeless language, with the only data type being the underlying machine's natural memory word format, whatever that might be. Depending on the context, the word was treated either as an integer or a memory address.

As machines with ASCII processing became common, notably the DEC PDP-11 that arrived at Bell, support for character data stuffed in memory words became important. The typeless nature of the language was seen as a disadvantage, which led Thompson and Ritchie to develop an expanded version of the language supporting new internal and user-defined types, which became the C programming language.

D.6 C

C, as in the letter c) is a general-purpose, procedural computer programming language supporting structured programming, lexical variable scope, and recursion, while a static type system prevents unintended operations. By design, C provides constructs that map efficiently to typical machine instructions and has found lasting use in applications previously coded in assembly language. Such applications include operating systems and various application software for computers, from supercomputers to embedded systems.

C was originally developed at Bell Labs by Dennis Ritchie between 1972 and 1973 to make utilities running on Unix. Later, it was applied to re-implementing the kernel of the Unix operating system.[6] During the 1980s, C gradually gained popularity. It has become one of the most widely used programming languages,[7][8] with C compilers from various vendors available for the majority of existing computer architectures and operating systems. C has been standardized by the ANSI since 1989 (see ANSI C) and by the International Organization for Standardization.

C is an imperative procedural language. It was designed to be compiled using a relatively straightforward compiler to provide low-level access to memory and language constructs that map efficiently to machine instructions, all with minimal runtime support. Despite its low-level capabilities, the language was designed to encourage cross-platform programming. A standards-compliant C program written with portability in mind can be compiled for a wide variety of computer platforms and operating systems with few changes to its source code. The language is available on various platforms, from embedded microcontrollers to supercomputers.

D.7 C++

C++ is a general-purpose programming language created by Bjarne Stroustrup as an extension of the C programming language, or "C with Classes". The language has expanded significantly over time, and modern C++ has

object-oriented, generic, and functional features in addition to facilities for low-level memory manipulation. It is almost always implemented as a compiled language, and many vendors provide C++ compilers, including the Free Software Foundation, LLVM, Microsoft, Intel, Oracle, and IBM, so it is available on many platforms.[6]

C++ was designed with a bias toward system programming and embedded, resource-constrained software and large systems, with performance, efficiency, and flexibility of use as its design highlights.[7] C++ has also been found useful in many other contexts, with key strengths being software infrastructure and resource-constrained applications,[7] including desktop applications, servers (e.g. e-commerce, Web search, or SQL servers), and performance-critical applications (e.g. telephone switches or space probes).[8]

C++ is standardized by the International Organization for Standardization (ISO), with the latest standard version ratified and published by ISO in December 2017 as ISO/IEC 14882:2017 (informally known as C++17).[9] The C++ programming language was initially standardized in 1998 as ISO/IEC 14882:1998, which was then amended by the C++03, C++11 and C++14 standards. The current C++17 standard supersedes these with new features and an enlarged standard library. Before the initial standardization in 1998, C++ was developed by Danish computer scientist Bjarne Stroustrup at Bell Labs since 1979 as an extension of the C language; he wanted an efficient and flexible language similar to C that also provided high-level features for program organization.[10] C++20 is the next planned standard, keeping with the current trend of a new version every three years.[11]

D.8 Python

Python is an interpreted, high-level, general-purpose programming language. Created by Guido van Rossum and first released in 1991, Python's design philosophy emphasizes code readability with its notable use of significant whitespace. Its language constructs and object-oriented approach aim to help programmers write clear, logical code for small and large-scale projects.[27]

Python is dynamically typed and garbage-collected. It supports multiple pro-

gramming paradigms, including procedural, object-oriented, and functional programming. Python is often described as a "batteries included" language due to its comprehensive standard library.[28]

Python was conceived in the late 1980s as a successor to the ABC language. Python 2.0, released in 2000, introduced features like list comprehensions and a garbage collection system capable of collecting reference cycles. Python 3.0, released in 2008, was a major revision of the language that is not completely backward-compatible, and much Python 2 code does not run unmodified on Python 3.

The Python 2 language, i.e. Python 2.7.x, is "sunsetting" on January 1, 2020 (after extension; first planned for 2015), and the Python team of volunteers will not fix security issues, or improve it in other ways after that date.[29][30] With the end-of-life, only Python 3.5.x and later will be supported.

Python interpreters are available for many operating systems. A global community of programmers develops and maintains CPython, an open source[31] reference implementation. A non-profit organization, the Python Software Foundation, manages and directs resources for Python and CPython development.

D.9 PHP

PHP: Hypertext Preprocessor (or simply PHP) is a general-purpose programming language originally designed for web development. It was originally created by Rasmus Lerdorf in 1994;[6] the PHP reference implementation is now produced by The PHP Group.[7] PHP originally stood for Personal Home Page,[6] but it now stands for the recursive initialism PHP: Hypertext Preprocessor.[8]

PHP code may be executed with a command line interface (CLI), embedded into HTML code, or used in combination with various web template systems, web content management systems, and web frameworks. PHP code is usually processed by a PHP interpreter implemented as a module in a web server or as a Common Gateway Interface (CGI) executable. The web server outputs

the results of the interpreted and executed PHP code, which may be any type of data, such as generated HTML code or binary image data. PHP can be used for many programming tasks outside of the web context, such as standalone graphical applications[9] and robotic drone control.[10]

The standard PHP interpreter, powered by the Zend Engine, is free software released under the PHP License. PHP has been widely ported and can be deployed on most web servers on almost every operating system and platform, free of charge.[11]

The PHP language evolved without a written formal specification or standard until 2014, with the original implementation acting as the de facto standard which other implementations aimed to follow. Since 2014, work has gone on to create a formal PHP specification.[12]

As of September 2019, over 60% of sites on the web using PHP are still on discontinued/”EOLed”[13] version 5.6 or older;[14] versions prior to 7.1 are no longer officially supported by The PHP Development Team,[15] but security support is provided by third parties, such as Debian.[16]