


Temperature and Humidity Sensor SHTC3 Breakout

SKU 333032



What it is

The SHTC3 breakout board precisely measures temperature and humidity, featuring easy I2C connectivity and low power consumption.

Overview

Want to keep track of both the humidity and temperature in your room? Or maybe in the greenhouse to protect your crops? The SHTC3 breakout board is the solution you're looking for! The digital sensor measures the changes in humidity and temperature very precisely. Since it's very accurate and the temperature range is wide, it is a go-to sensor if you want precise climate information.

The breakout board uses the I2C communication protocol. Thus, it has two qwiic ports so no soldering, nor distinguishing between SDA and SCL is required. The hardware-defined I2C address is 0x70. The design is 3.3V ready with an onboard regulator for 5V. The board's standard current consumption is low, only 430 μ A.

Product usage tips: If you encounter errors when using the breakout board, see if it's connected properly. First, look at the pinout on the board and your microcontroller. If everything seems OK, look at the connections on the breakout board. If all the wiring is correct, make sure that the breakout board's I2C address is right. It should be 0x70. Everything as it should be so far? Go through your code again. There might be some bugs that are stopping things from working as expected.

The SHTC3 breakout board works wonderfully in combination with NULA Core and 16x2 qwiic LCD. You can display temperature in one row and humidity in the other. Due to the qwiic connections on all three, hooking all the devices together is as easy as it gets. The SHTC3 breakout board has two mounting holes so it can be attached to the project and won't budge. The pins provided can be soldered if you don't want to use the qwiic ports.

To keep the longevity of the sensor, keep track of the current going through the circuit. Allowing an excessive amount of current to flow through it may cause the sensor to fail. It is not impact-resistant. When dropped from a high distance or at an odd angle, it can break beyond repair.

Technical details

- **Standard current consumption:** 430 μ A
- **Standby current consumption:** 45 μ A
- **Logic voltage level:** 3.3V
- **Operating voltage:** 3.3 (onboard regulator for 5V)
- **Temperature measurement span:** -40°C to 125°C; $\pm 0.2^\circ\text{C}$
- **Relative humidity measurement span:** 0% to 100%; $\pm 2\%$ RH
- **Communication:** I2C (address: 0x70)
- **Connectors:** Qwiicx2
- **Mounting holes:** 2
- **Dimensions:** 22 x 22 mm / 0.9 x 0.9 inch

Specifications

Interface

Interface	I2C
qwiic Compatible	Yes
I2C Address Default	0x70
I2C Address Changeable	No
Breadboard Compatible	Yes

Measurement

Measurement Types	Temperature, Humidity
Measurement Range	Temperature -40 to 125°C; Humidity 0 to 100 %RH
Measurement Accuracy	Temperature $\pm 0.2^{\circ}\text{C}$; Humidity $\pm 2\%$ RH

Power

Supply Voltage	3.3–5 V
Logic Level	3.3 V or 5 V
Operating Current	0.478 mA
Sleep Current	0.3 μA

Other

IC Part Number	SHTC3
-----------------------	-------


Pinout

TEMPERATURE AND HUMIDITY SENSOR SHTC3 - Pinout

JP1 (NC) - 5V I2C pull up resistors
JP2 (NC) - 3.3V I2C pull up resistors
JP3 (NC) - 5V voltage regulator

JP4 (NO) - Bypass voltage regulator

Single-cable connection for power and I²C data via easyC/Qwiic

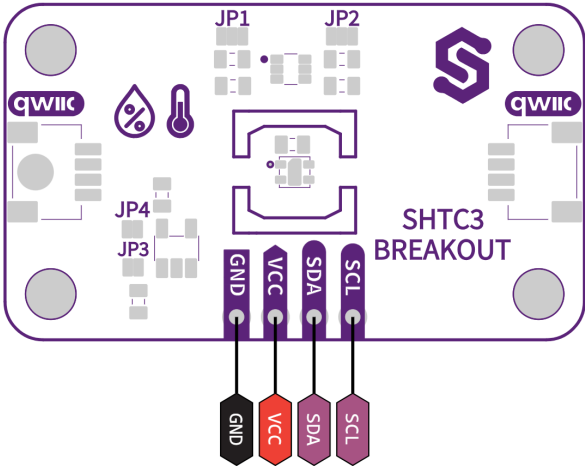



Full product documentation: solde.red/333032

Version: V1.3.0

Pin description

Power supply pin

Ground

Control

GPIO

ADC pin

DAC pin

SPI comms

UART comms

I2C comms

PWM comms

Other

Port name

General info

Warning!



This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

Typical applications

The SHTC3 Breakout gives you a compact temperature and humidity sensor with a qwiic-compatible I2C connector. It fits into environmental sensing, HVAC monitoring and smart home prototypes where accurate air measurements matter and you want to avoid soldering a sensor directly to the board.

What’s in the box

- 1 × Temperature and Humidity Sensor SHTC3 Breakout (main product)
- 1 × Header pins (unsoldered) — Header pins included for all breadboard-compatible pins

Resources

Technical Resources	Hardware Details WEB
Documentation	Full Documentation DOCS
Software Resources	Arduino Library GITHUB · Arduino: Get Started DOCS · MicroPython Module GITHUB

Product data last updated 2026-06-29. Source: solde.red/333032

Temperature and Humidity Sensor SHTC3 Breakout · SKU 333032 · Generated 2026-08-04

Page 3 of 3