


Homework #13

Donald Aingworth IV

November 20, 2024

Problem 1

Figure 10-35 shows three 0.0100 kg particles that have been glued to a rod of length $L = 6.00$ cm and negligible mass. The assembly can rotate around a perpendicular axis through point O at the left end. If we remove one particle (that is, 33% of the mass), by what percentage does the rotational inertia of the assembly around the rotation axis decrease when that removed particle is (a) the innermost one and (b) the outermost one?

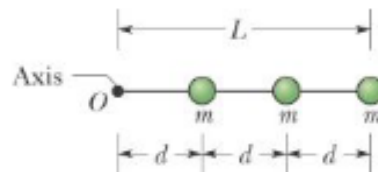

Solution

$$I_{123} = \Sigma m_i r_i^2 = 10 * (2^2 + 4^2 + 6^2) = 10 * (4 + 16 + 36) = 10 * (56) = 560 \text{ g} * \text{cm}^2$$

a) 7.2%

$$I_{23} = 10 * (4^2 + 6^2) = 10 * (16 + 36) = 10 * (52) = 520 \text{ g} * \text{cm}^2$$

$$\frac{I_{23}}{I_{123}} = \frac{520}{560} = 0.928$$

The percentage lost is one minus the fraction, so the answer is $1 - \frac{I_{23}}{I_{123}} = 0.072 =$
7.2%.

b) 64.3%

$$I_{12} = 10 * (2^2 + 4^2) = 10 * (4 + 16) = 10 * (20) = 200 \text{ g} * \text{cm}^2$$

$$\frac{I_{12}}{I_{123}} = \frac{200}{560} = 0.357$$

The percentage lost is one minus the fraction, so the answer is $1 - \frac{I_{12}}{I_{123}} = 0.643 =$
64.3%.

Problem 2

Two particles with masses 2.00 and 5.00 kg are connected by a light rod of length 2.00 m. Find the moment of inertia of the system about an axis perpendicular to the rod and passing through (a) the midpoint and (b) the center of mass.

Solution

Section (a)

We know that the midpoint of the rod is at 1 m. Mass constants allow us to calculate the moment of inertia without an integral.

$$I = \Sigma m_i r_i^2 = 2 * (-1)^2 + 5 * 1^2 = 2 + 5 = \boxed{7 \text{kg} * \text{m}^2}$$

Section (b)

We first calculate the center of mass.


$$x_{com} = \frac{\Sigma_i m_i * r_i}{\Sigma m_i} = \frac{2 * 0 + 5 * 2}{5 + 2} = \frac{10}{7} \text{m}$$

This means that the lighter mass will be located (relatively) at $-\frac{10}{7}\text{m}$, while the heavier mass will be located at $2 - \frac{10}{7} = \frac{4}{7}\text{m}$. We can calculate the moment of inertia from this.

$$I = 2 * \left(-\frac{10}{7}\right)^2 + 5 * \left(\frac{4}{7}\right)^2 = 2 * \frac{100}{49} + 5 * \frac{16}{49} = \frac{200 + 80}{49} = \boxed{\frac{280}{49} \text{kg} * \text{m}^2}$$

Problem 3

For each of the forces depicted in the figure find the torque about the pivot (black dot at center of rod). Take $F_1 = 10.0$ N, $F_2 = 15.0$ N, $F_3 = 8.00$ N, and $L = 9.00$ m. The rods length is L .

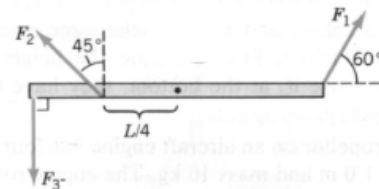

Solution

Torque is calculatable with a sum.

$$\begin{aligned}\tau &= \sum r_i F_i \sin(\phi) = \frac{L}{2} F_1 \sin(60^\circ) + \frac{L}{4} F_2 \sin(-45^\circ) + \frac{L}{2} F_3 \\ &= \frac{9 * 10\sqrt{3}}{4} - \frac{9 * 15 * \sqrt{2}}{8} + \frac{8 * 9}{2} = \boxed{51.106 \text{ N} \cdot \text{m}}\end{aligned}$$

Problem 4

The angular position of a line on a disk of radius $r = 6.00$ cm is given by

$$\theta = 10.0 - 5.00t + 4t^2 \text{ rad}$$

Find: (a) the average angular speed between 1.00 and 3.00 s; (b) the linear speed of a point on the rim at 2.00 s; (c) the radial and tangential accelerations of a point on the rim at 2.00 s.

Solution

Section (a)

$$\theta(1) = 10.0 - 5.00 * 1 + 4 * 1^2 = 9$$

$$\theta(3) = 10.0 - 5.00 * 3 + 4 * 3^2 = 10 - 15 + 36 = 31$$

$$\omega_{avg} = \frac{\theta(3) - \theta(1)}{3 - 1} = \frac{31 - 9}{3 - 1} = \frac{22}{2} = \boxed{11 \text{ s}^{-1}}$$

Section (b)

$$\omega(t) = \frac{d\theta(t)}{dt} = \frac{d}{dt} (10.0 - 5.00t + 4t^2) = -5.00 + 8.00t$$

$$\omega(2) = -5.00 + 8.00 * 2 = 16 - 5 = 11 \text{ s}^{-1}$$

$$v_t(2) = r * \omega(2) = 6 * 11 = \boxed{66 \text{ cm/s}}$$

Section (c)


$$\alpha(t) = \frac{d\omega(t)}{dt} = \frac{d}{dt} (-5.00 + 8.00t) = 8.00 \text{ s}^{-2}$$

$$a_t = r * \alpha = 6 * 8 = \boxed{48 \text{ cm/s}^2}$$

$$a_c = \omega^2 r = 11^2 * 6 = 121 * 6 = \boxed{726 \text{ cm/s}^2}$$

Problem 5

The book in the figure has the same shape as your physics textbook. About which axis is the rotational inertia (a) the largest; (b) the smallest? *You must justify your answer.*



Solution


The rotational inertia of any point is directly related to the mass and directly related to the square of the distance from the axis of rotation. Along any axis, we eliminate one dimension of any point's distance to the axis of rotation. No matter what axis we rotate around, the number of points and their masses will remain the same.

a) For the largest inertia, we should try to maximize the distance to the axis of rotation. Along axis C, we maximize the distance to any point by eliminating the smallest dimension of the object from rotation. This makes C the answer.

b) For the smallest inertia, we should try to minimize the distance to the axis of rotation. Along axis B, we minimize the distance to any point by eliminating the largest dimension of the object from rotation. This makes B the answer.

Problem 6

The wheel shown in the figure below has a central hub of radius 2.00 m and a mass of 2.00 kg. Each of the four spokes is 4.00 m long and has a mass of 1.00 kg. The outer thin ring has a radius of 6.00 m and a mass of 2.00 kg. Find the rotational inertia about an axis through the center perpendicular to the plane of the wheel. Treat the hub as a disk. *Hint, you will have to use the parallel axis theorem with the spokes.*




Solution

We know the rotational inertia formula is $I = \int r^2 dm$.

Problem 7


Two solid spheres of mass m and radius R are stuck to the ends of a thin rod of mass m and length $3R$. Find the rotational inertia of the system about the axis at the midpoint of the rod and perpendicular to it, as shown in the figure below.

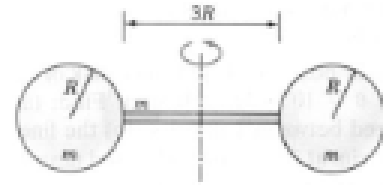

Solution

Problem 8

A light (massless) rod of length $L = 1.5$ m is freely pivoted at one end. Three forces act as shown in the figure below. The force \vec{F}_3 acts at the midpoint. What is the torque due to each force? Take $F_1 = 6.90$ N, $F_2 = 4.00$ N, $F_3 = 2.00$ N, $\theta = 20^\circ$, and $\alpha = 30^\circ$.

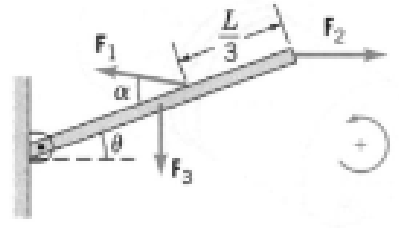

Solution