| | |
|---|---|
| Batch: A2 | Roll No.: 16010324044 |
| Experiment / assignment / tutorial No. 9 | |
| Grade: AA / AB / BB / BC / CC / CD /DD | |
| Signature of the Staff In-charge with date | |

**TITLE:** Configure Email server using Cisco Packet Tracer.

**AIM:** To configure Email server for given network topology using Cisco Packet Tracer.

**OUTCOME:** Student will be able to Understand operations of various application layer protocols

**Theory:**


A mail server (or email server) is a computer system that sends and receives email. In many cases, web servers and mail servers are combined in a single machine. However, large ISPs and public email services (such as Gmail and Hotmail) may use dedicated hardware for sending and receiving email.

In order for a computer system to function as a mail server, it must include mail server software. This software allows the system administrator to create and manage email accounts for any domains hosted on the server. For example, if the server hosts the domain name "cisco.com," it can provide email accounts ending in "@cisco.com."

Mail servers send and receive email using standard email protocols. For example, the SMTP protocol sends messages and handles outgoing mail requests. The IMAP and POP3 protocols receive messages and are used to process incoming mail. When you log on to a mail server using a webmail interface or email client, these protocols handle all the connections behind the scenes.

**Procedure:**

1. To begin with the experiment, open Cisco Packet Tracer
2. Create the lab and configure the basic IP addressing for all PCs and server for the network topology shown below:

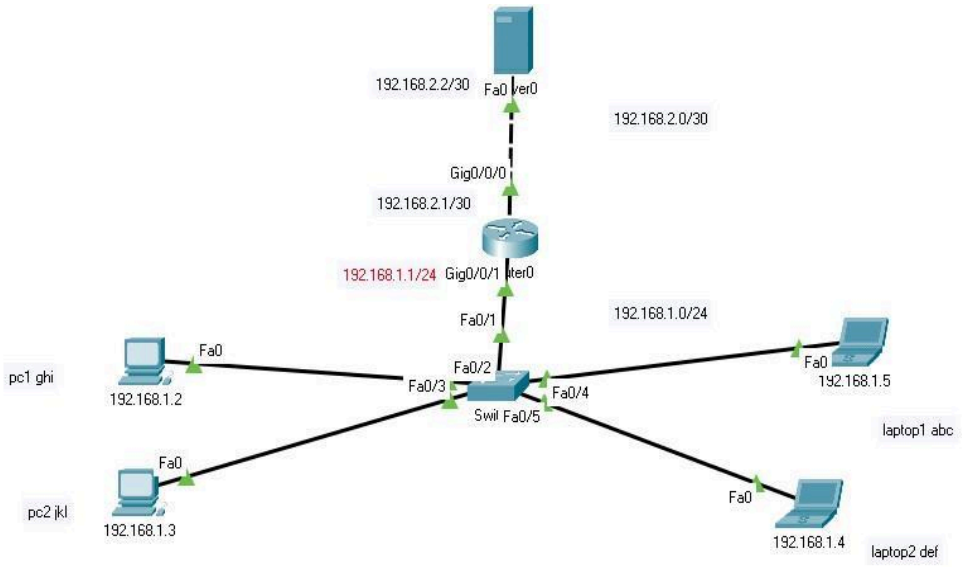



3. Open the services tab in server and make SMTP and POP3 service ON


Add Domain name as cisco.com

Add the users as per the number of laptops/desktops added.

Assign passwords for each user

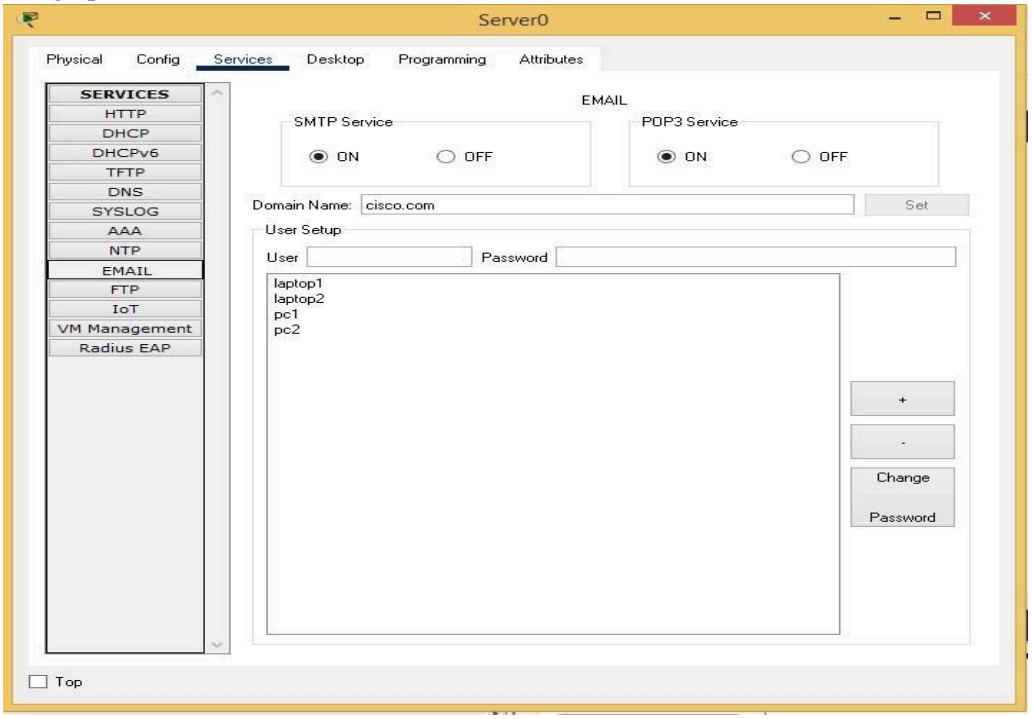



4. Go to **laptop-> Email-> configure mail** as shown below

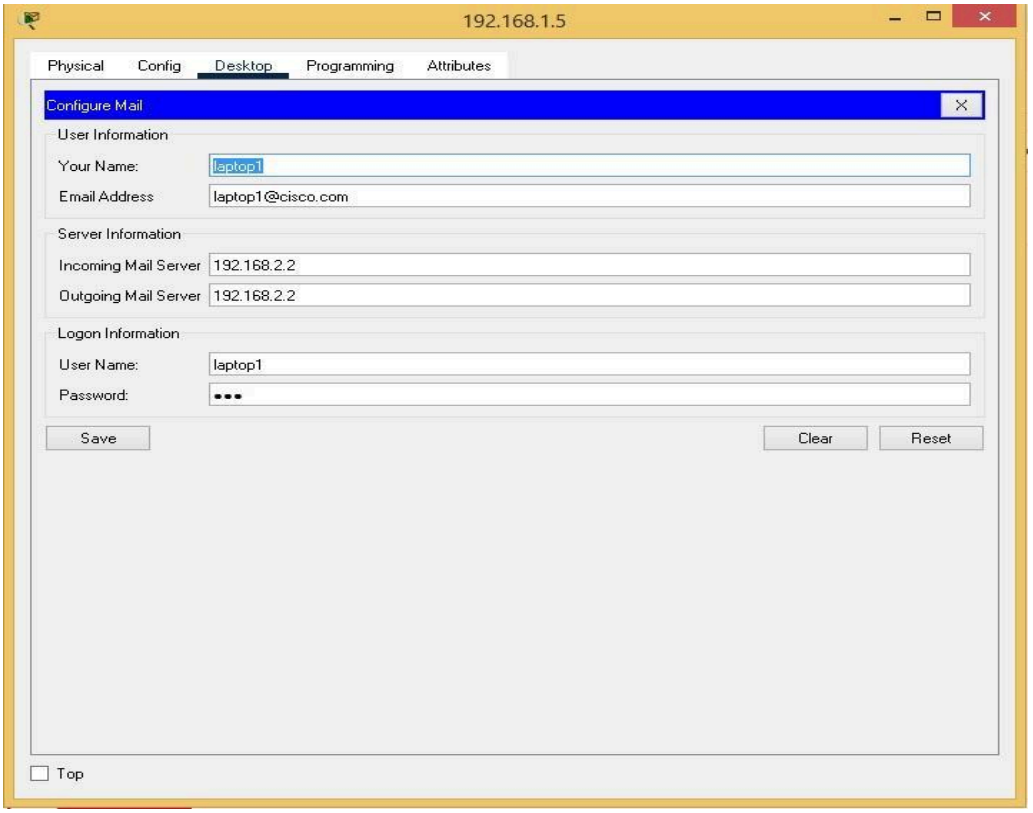


Use the username and password as assigned to each user as done in the previous step.


5. Repeat step 4 for all the devices.


6.Send an email from PC1 192.168.1.2 to laptop 1 192.168.1.5

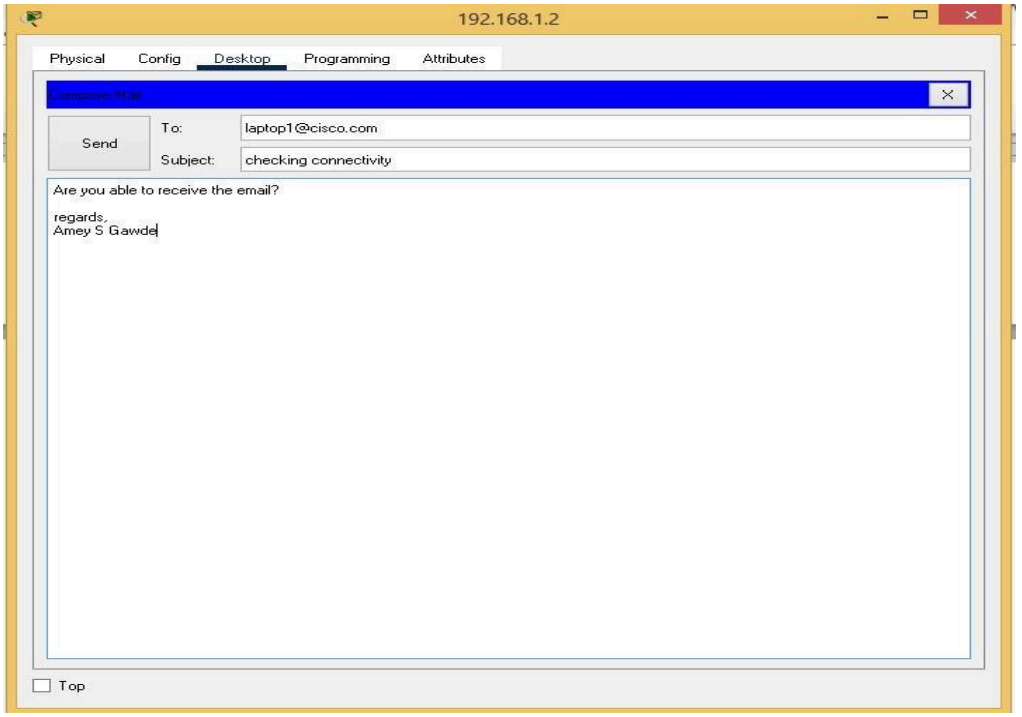



7. Go to laptop 1, go to email and click on the receive button to read the message. Similarly an email can be sent from laptop to PC


**Output:**

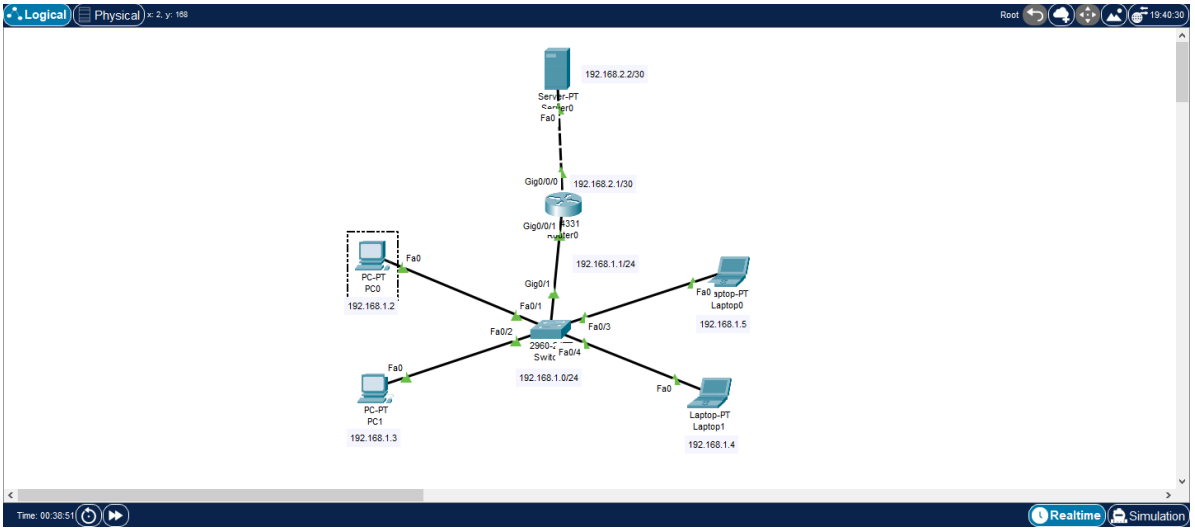

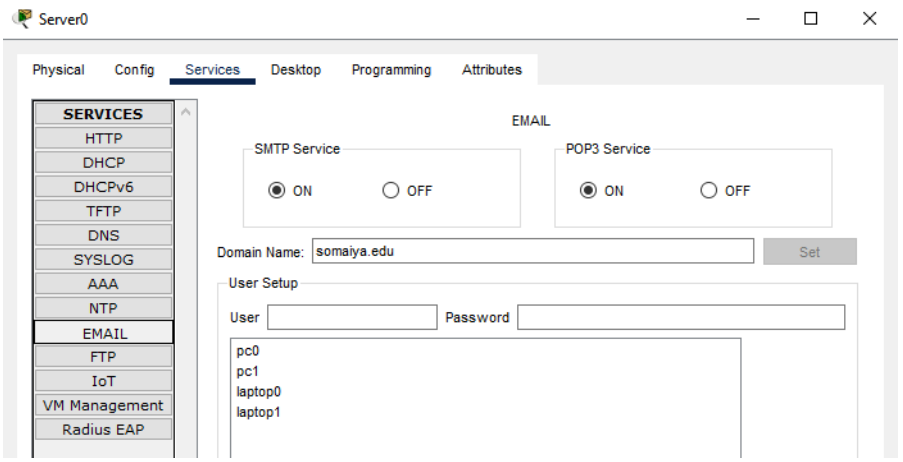

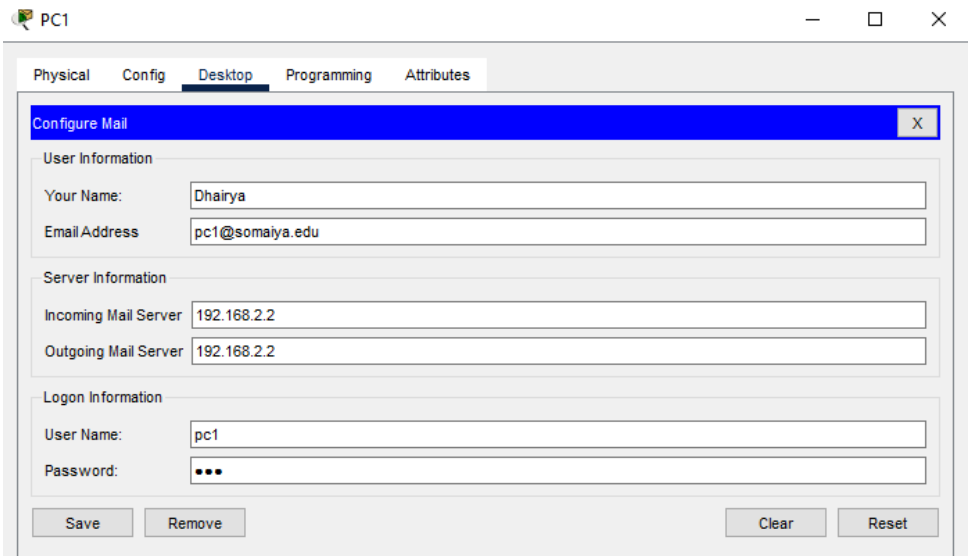
## CONCLUSION

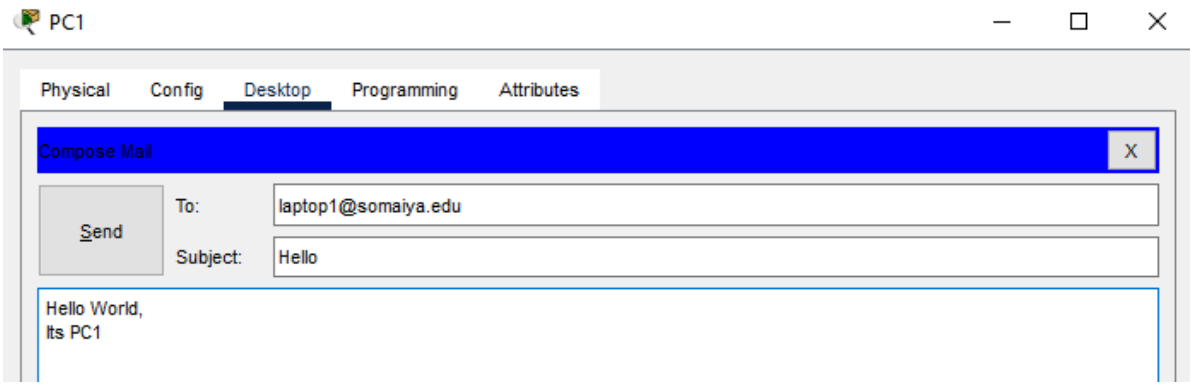In this experiment, I successfully configured Email Server using Cisco Packet Tracer. SMTP and POP3 services were enabled on the server, the domain `cisco.com` and required user accounts were created, and email clients were configured on the connected devices. An email was successfully sent from PC1 to Laptop 1 and received using the configured mail server. Thus, the working of application-layer email protocols, particularly SMTP for sending and POP3 for receiving emails, was successfully verified.

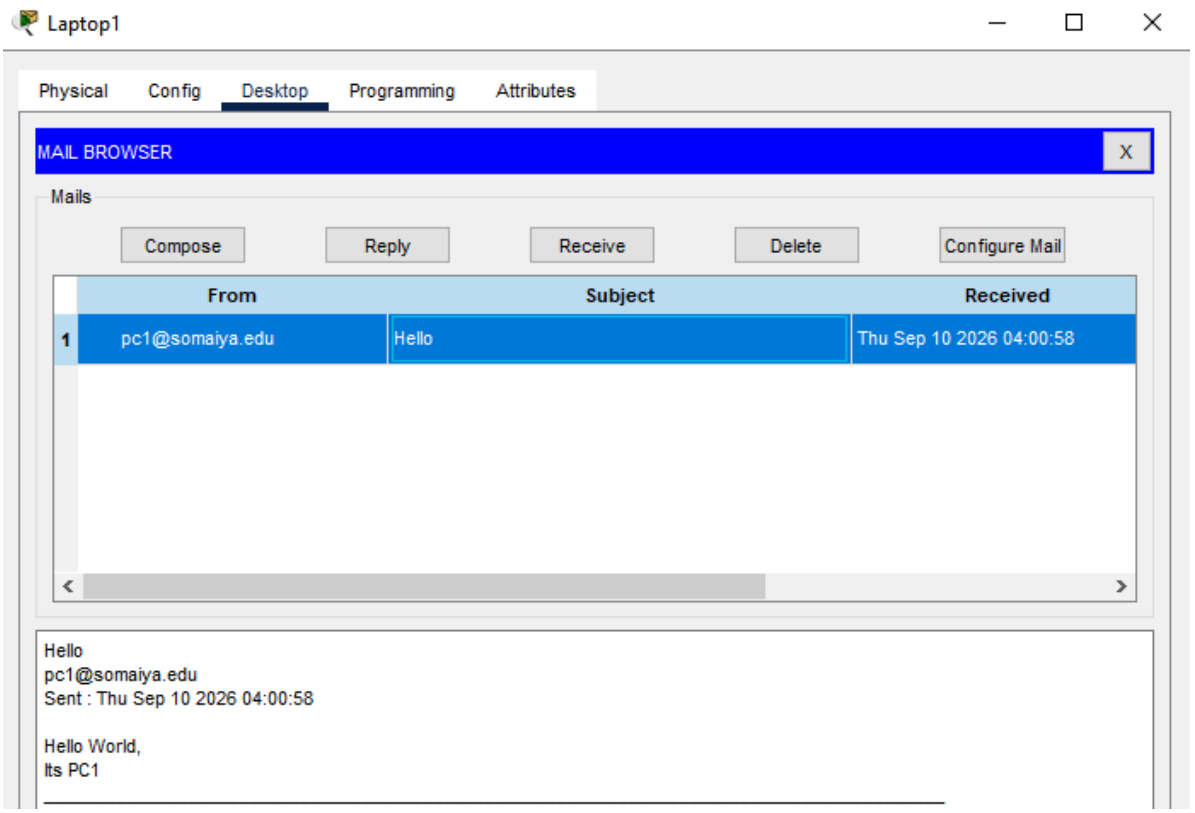**Signature of faculty in-charge**