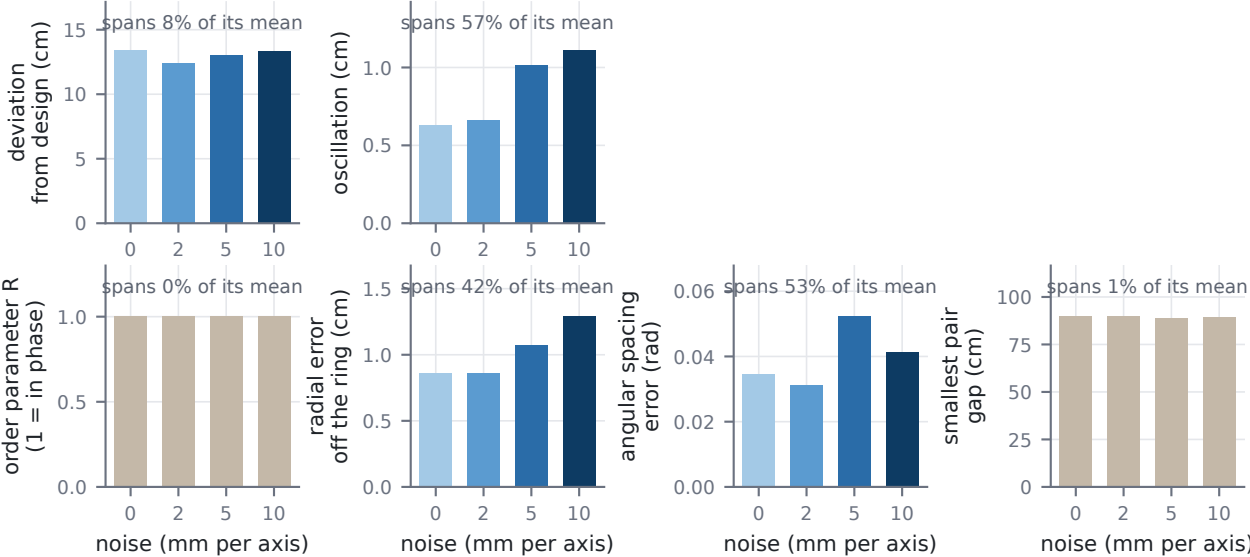
deviation from design (cm)
spans 8% of its mean
oscillation (cm)
spans 57% of its mean
order parameter R (1 = in phase)
spans 0% of its mean
radial error off the ring (cm)
spans 42% of its mean
angular spacing error (rad)
spans 53% of its mean
smallest pair gap (cm)
spans 1% of its mean
noise (mm per axis)
noise (mm per axis)
noise (mm per axis)
noise (mm per axis)