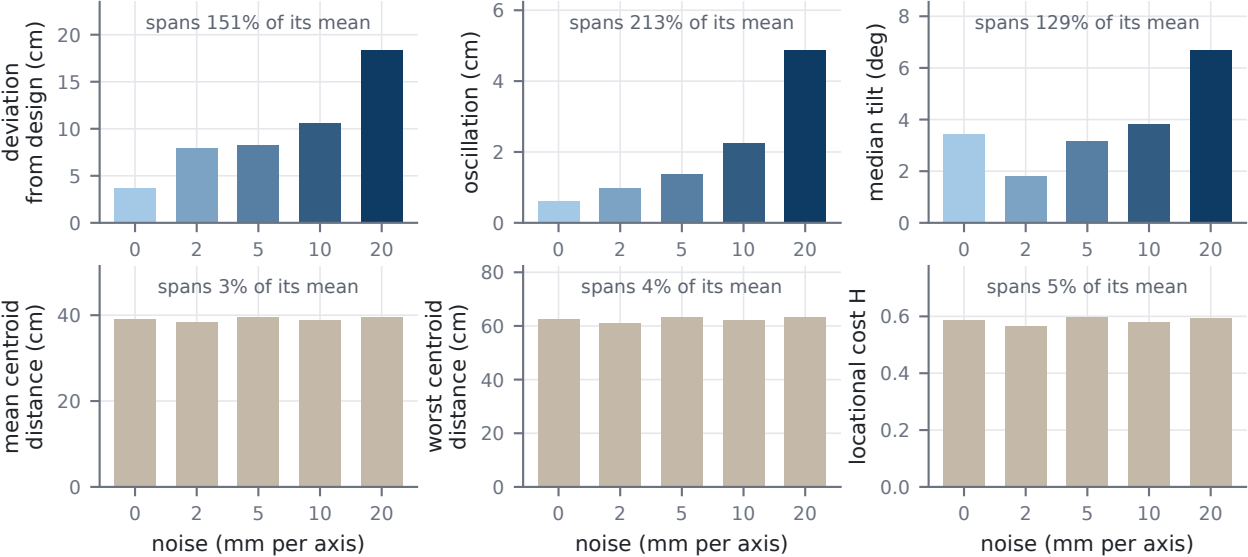
deviation from design (cm)
spans 151% of its mean
oscillation (cm)
spans 213% of its mean
median tilt (deg)
spans 129% of its mean
mean centroid distance (cm)
spans 3% of its mean
worst centroid distance (cm)
spans 4% of its mean
locational cost H
spans 5% of its mean
0
2
5
10
20
noise (mm per axis)