

AC / DC Dual Use Hi-blow Air Pumps

HAILEA 海利




Product description

- Microcomputer-controlled and recharge automatically. Auto switch between AC and DC. Maintenance-free 12V battery inside.
- Driven by high quality motor for higher air output. Air output can be adjusted.
- Multi-level muffler and damping systems, operate which low in noise.
- Non-oil lubricated design to produce purified air.



Performance Curve

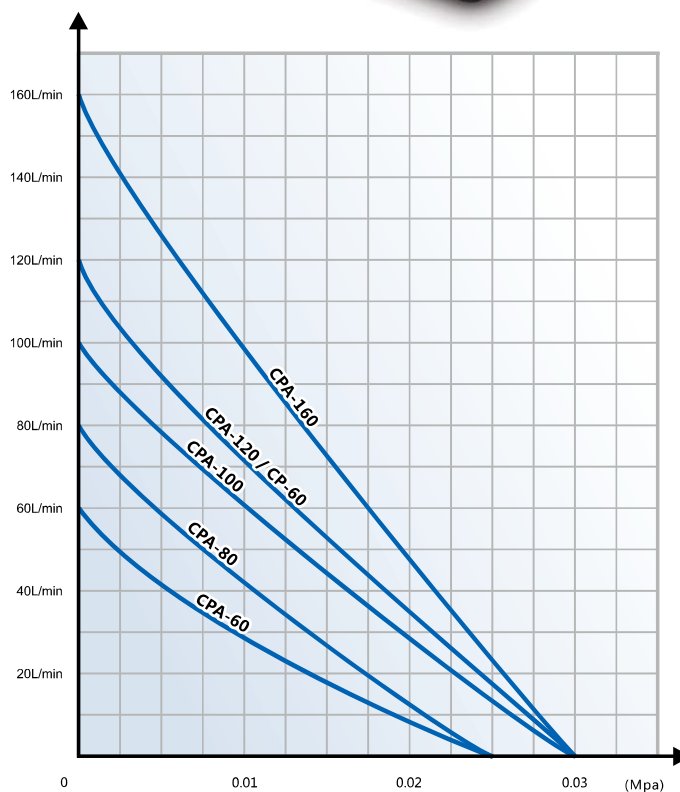

Specifications

Model	Voltage	Frequency	Power	Pressure	Output	Time
CPA-60	110-120V / 220-240V	60Hz / 50Hz	12W	0.025Mpa	30L/min X 2	≥10H
CPA-80			16W	0.025Mpa	40L/min X 2	
CPA-100			22W	0.03Mpa	50L/min X 2	
CPA-120			28W	0.03Mpa	60L/min X 2	
CPA-160			35W	0.03Mpa	80L/min X 2	
CP-60			30W	0.03Mpa	60L/min X 2	