


MORI / REAR TYPE-C + POWER SWITCH / P4


PROTOTYPE / NOT_TESTED. No PD negotiation or battery CC/CV charging on this interface board.

01 USB-C charge inlet / fuse / CC pass-through

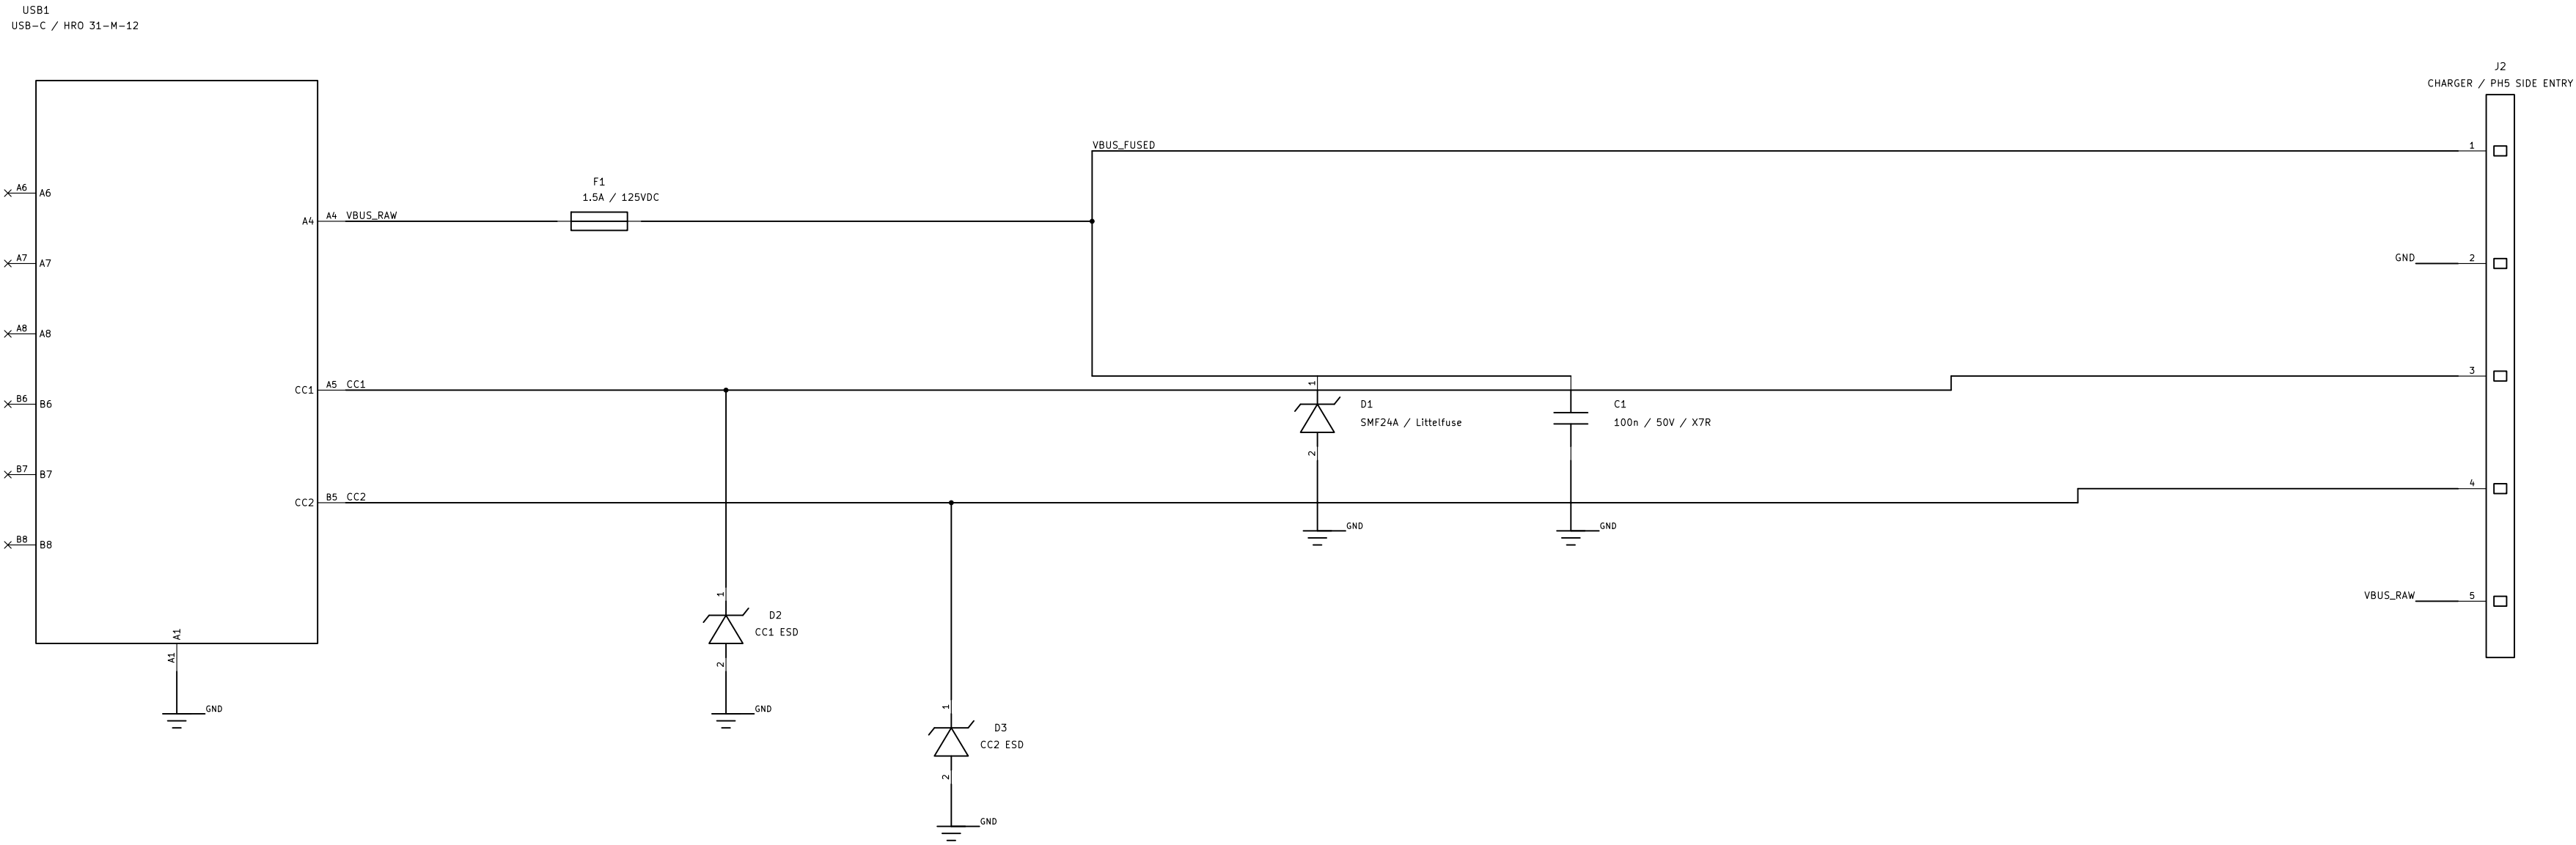



5-20V only after external sink negotiation. 1A continuous target; current limit and 3S charger remain external.

02 Physical master switch + latch-clear loop

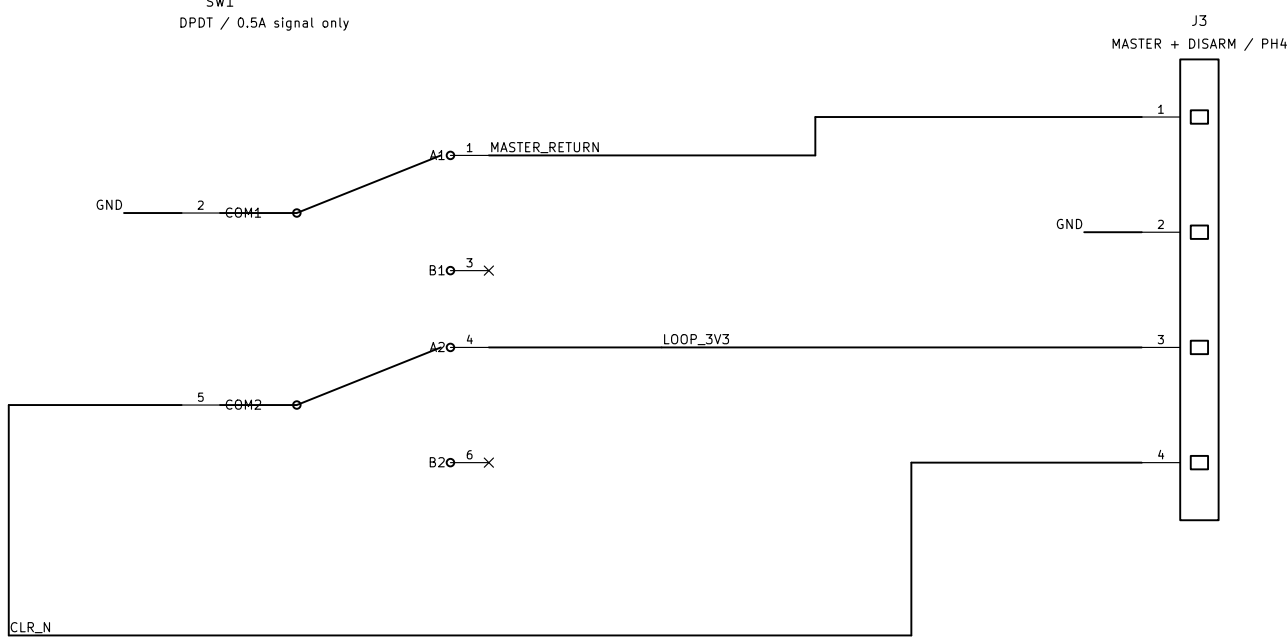

ON closes both poles. OFF / broken harness opens both. A fresh local ARM is required after switch-on.

03 Mechanical and test interfaces



H1=(3.11), H2=(21.11); NPTH 2.2mm

24 x 25 x 1.6mm; no exposed top metal on side seats.

PCB grows 11mm inward. Actual USB/switch opening positions require mechanical update.

PROTOTYPE / NOT_TESTED – PD sink and 3S charger external

Sheet: /
File: MORI_rear_P4.kicad_sch

Title: MORI / rear_P4 – FUNCTIONAL SCHEMATIC

Size: User Date: 2026-09-23

KiCad E.D.A. 10.0.6

Rev: P4 Interface prototype

Id: 1/1