


11 Motion 5 V / independent fused buck

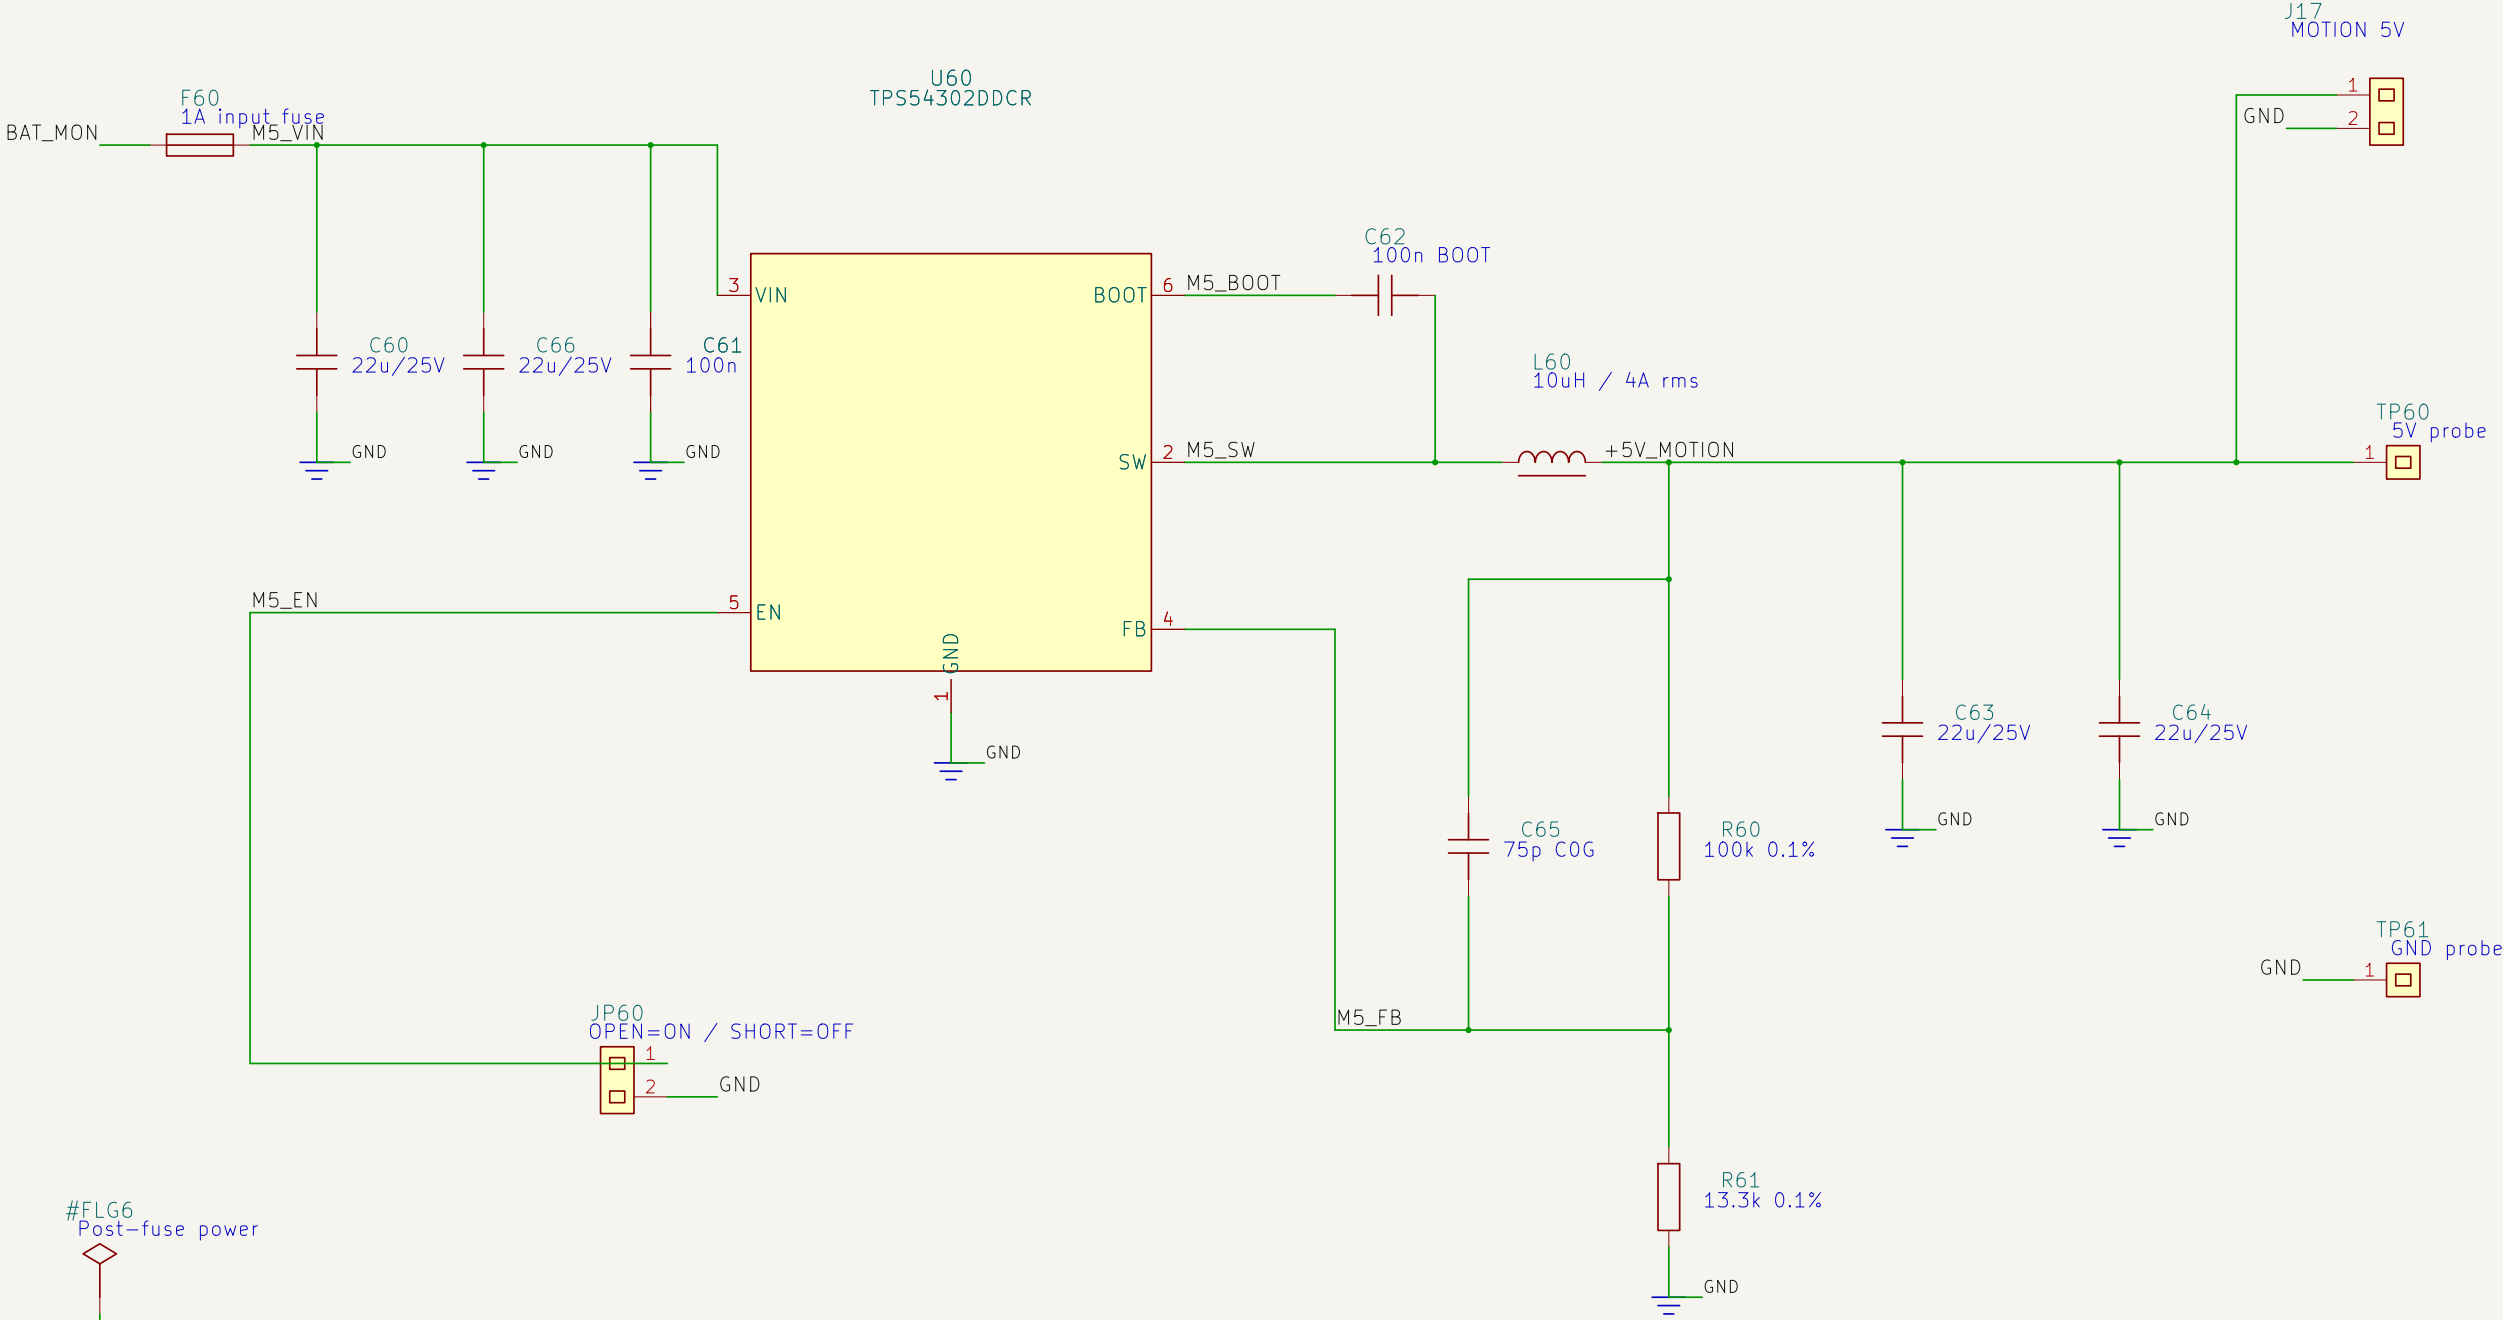


#FLG6
Post-fuse power
M5_VIN
Post-fuse power declaration only

Setpoint 5.077V. MCU 3V3 remains local.

EN is internally pulled up; never connect to raw battery.

Prototype: verify stability, temperature, cable drop and concurrent load. No PCB placement frozen.

12 Interaction 5 V / independent fused buck

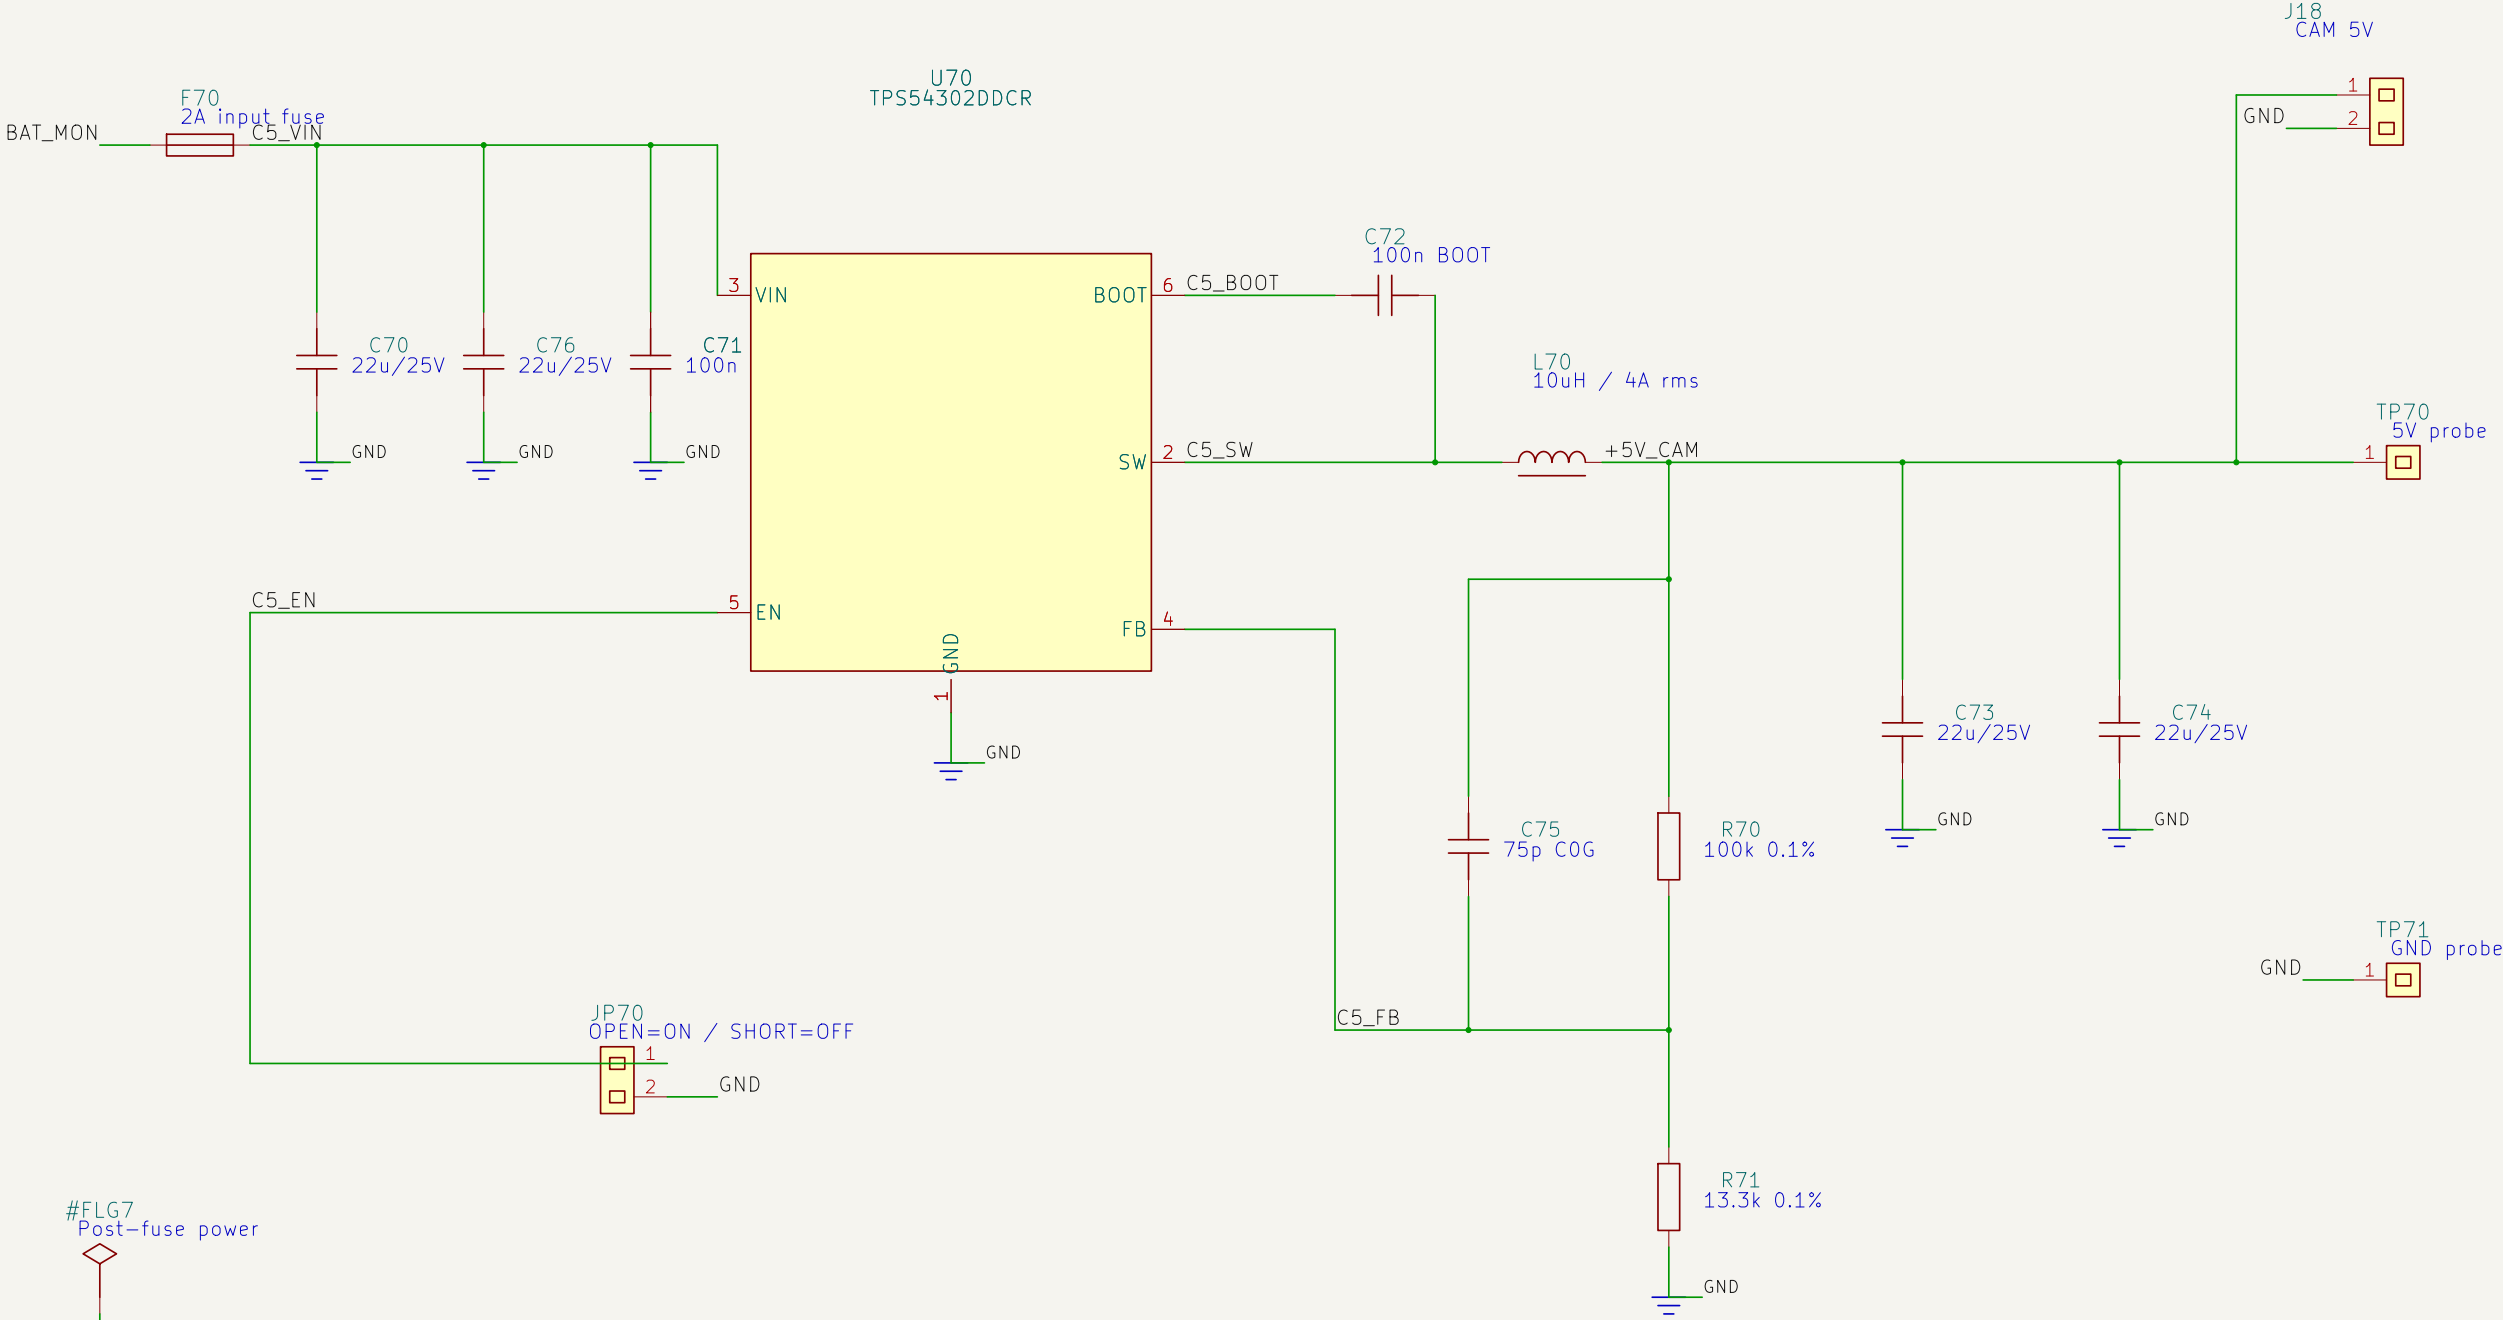


EN is internally pulled up; never connect to raw battery.

Setpoint 5.077V. MCU 3V3 remains local.


Prototype: verify stability, temperature, cable drop and concurrent load. No PCB placement frozen.

01 Pack input / reverse protection / shunt

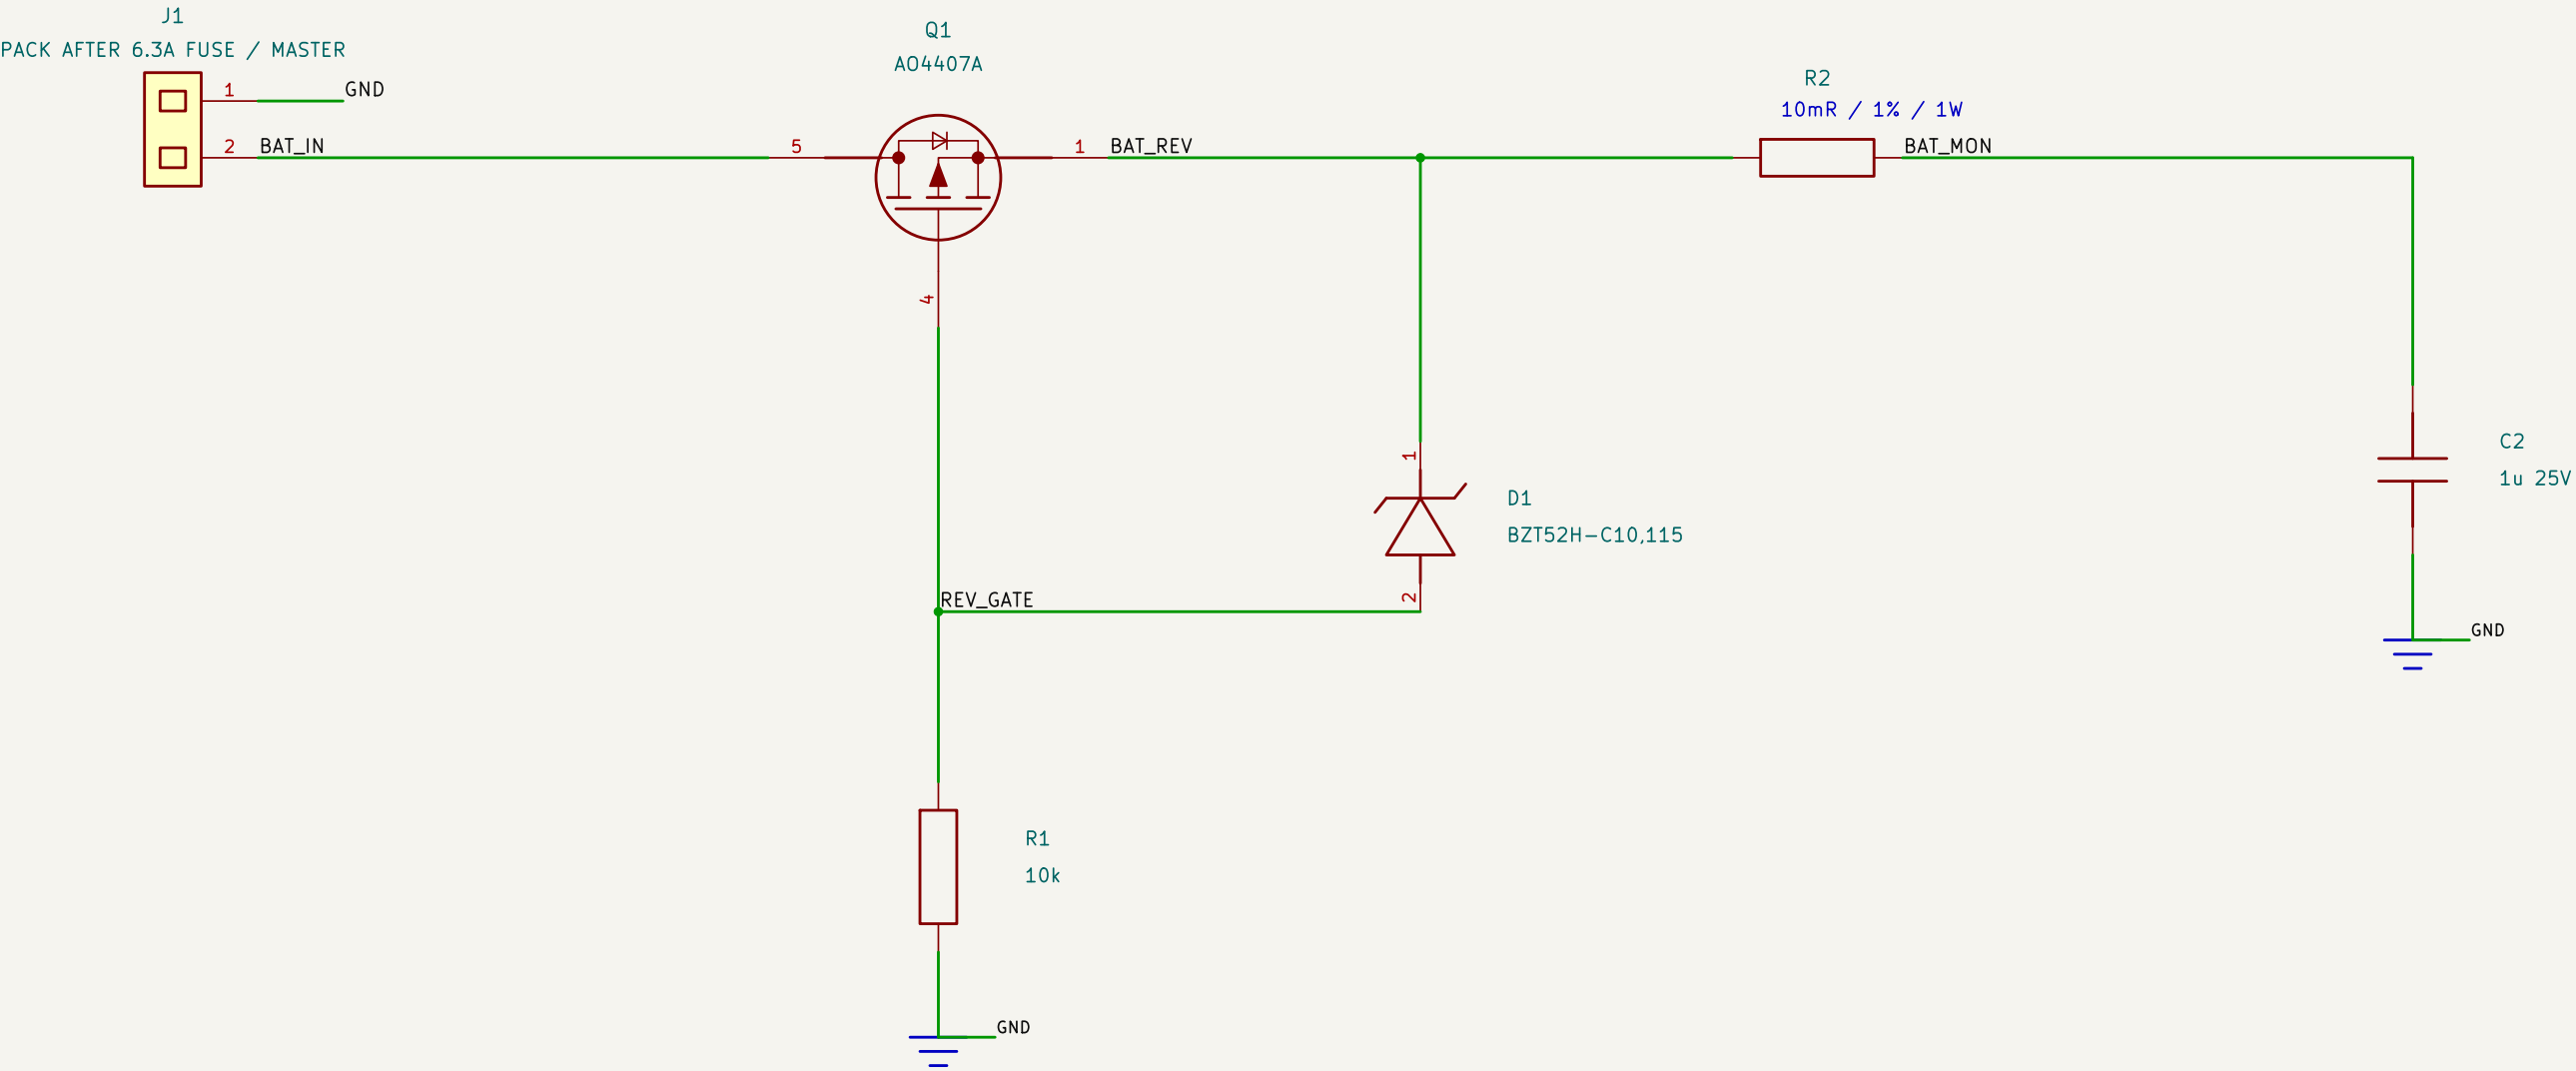


External pack, fuse and master switch precede J1. No charger on this PCB.

02 Kelvin current sense

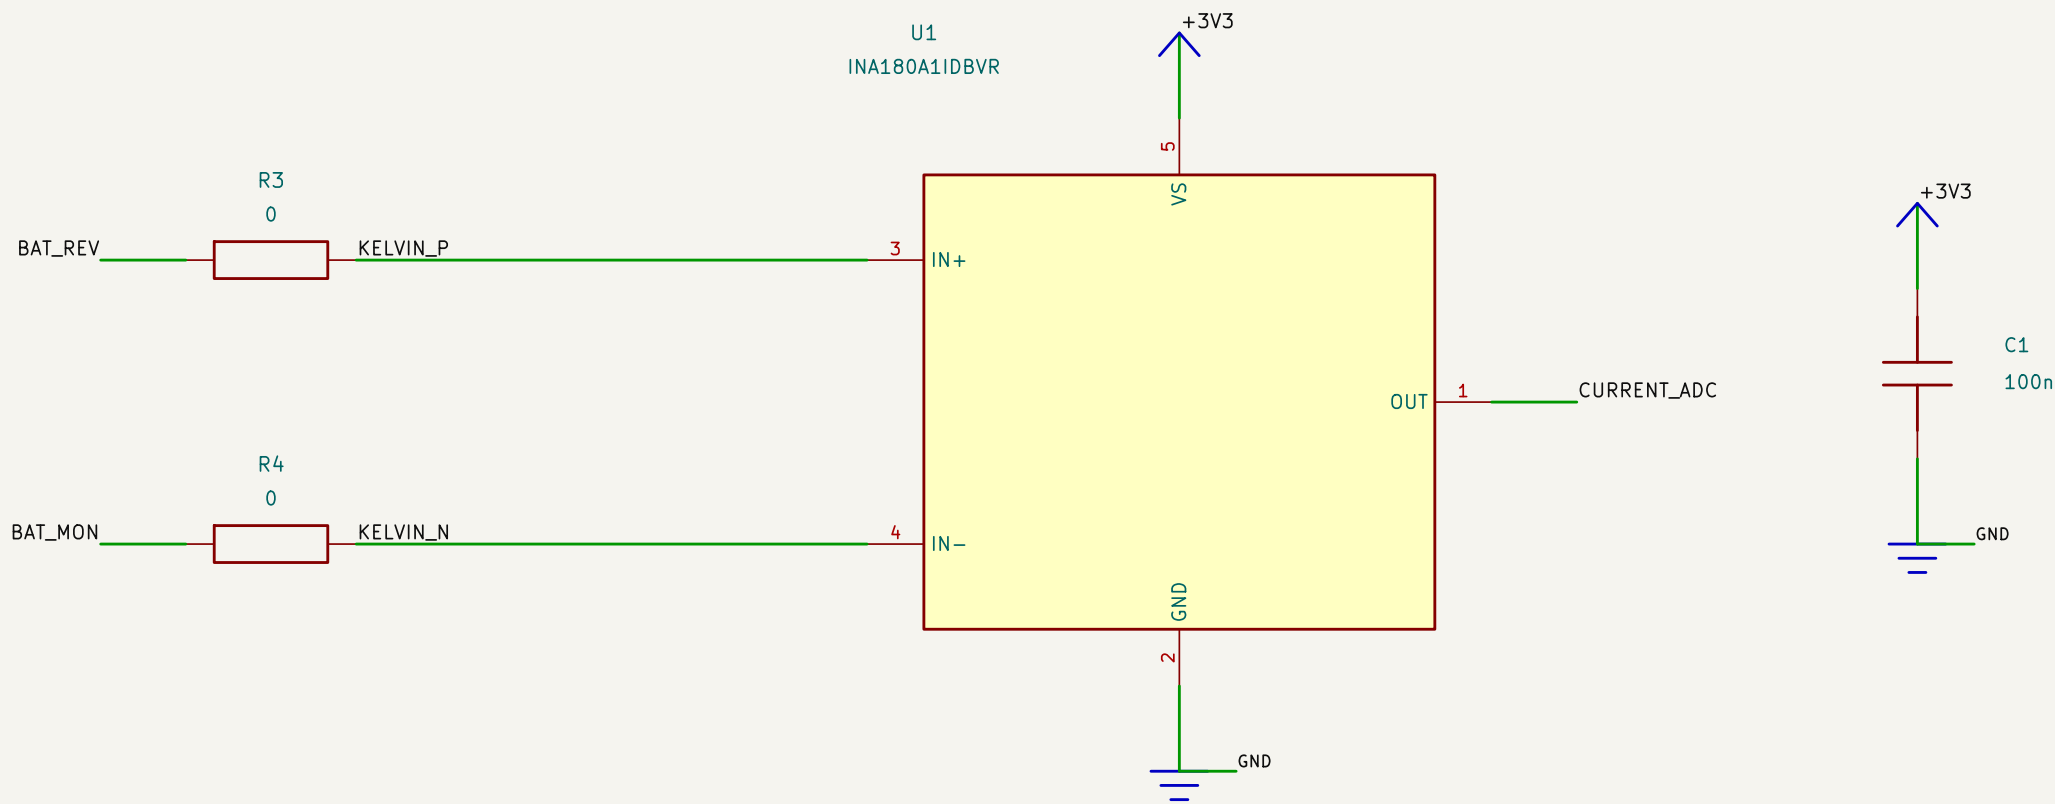


Sense from the shunt pads. Discharge-only nominal transfer: 0.2 V/A.

03 Wheel 9 V conditioning

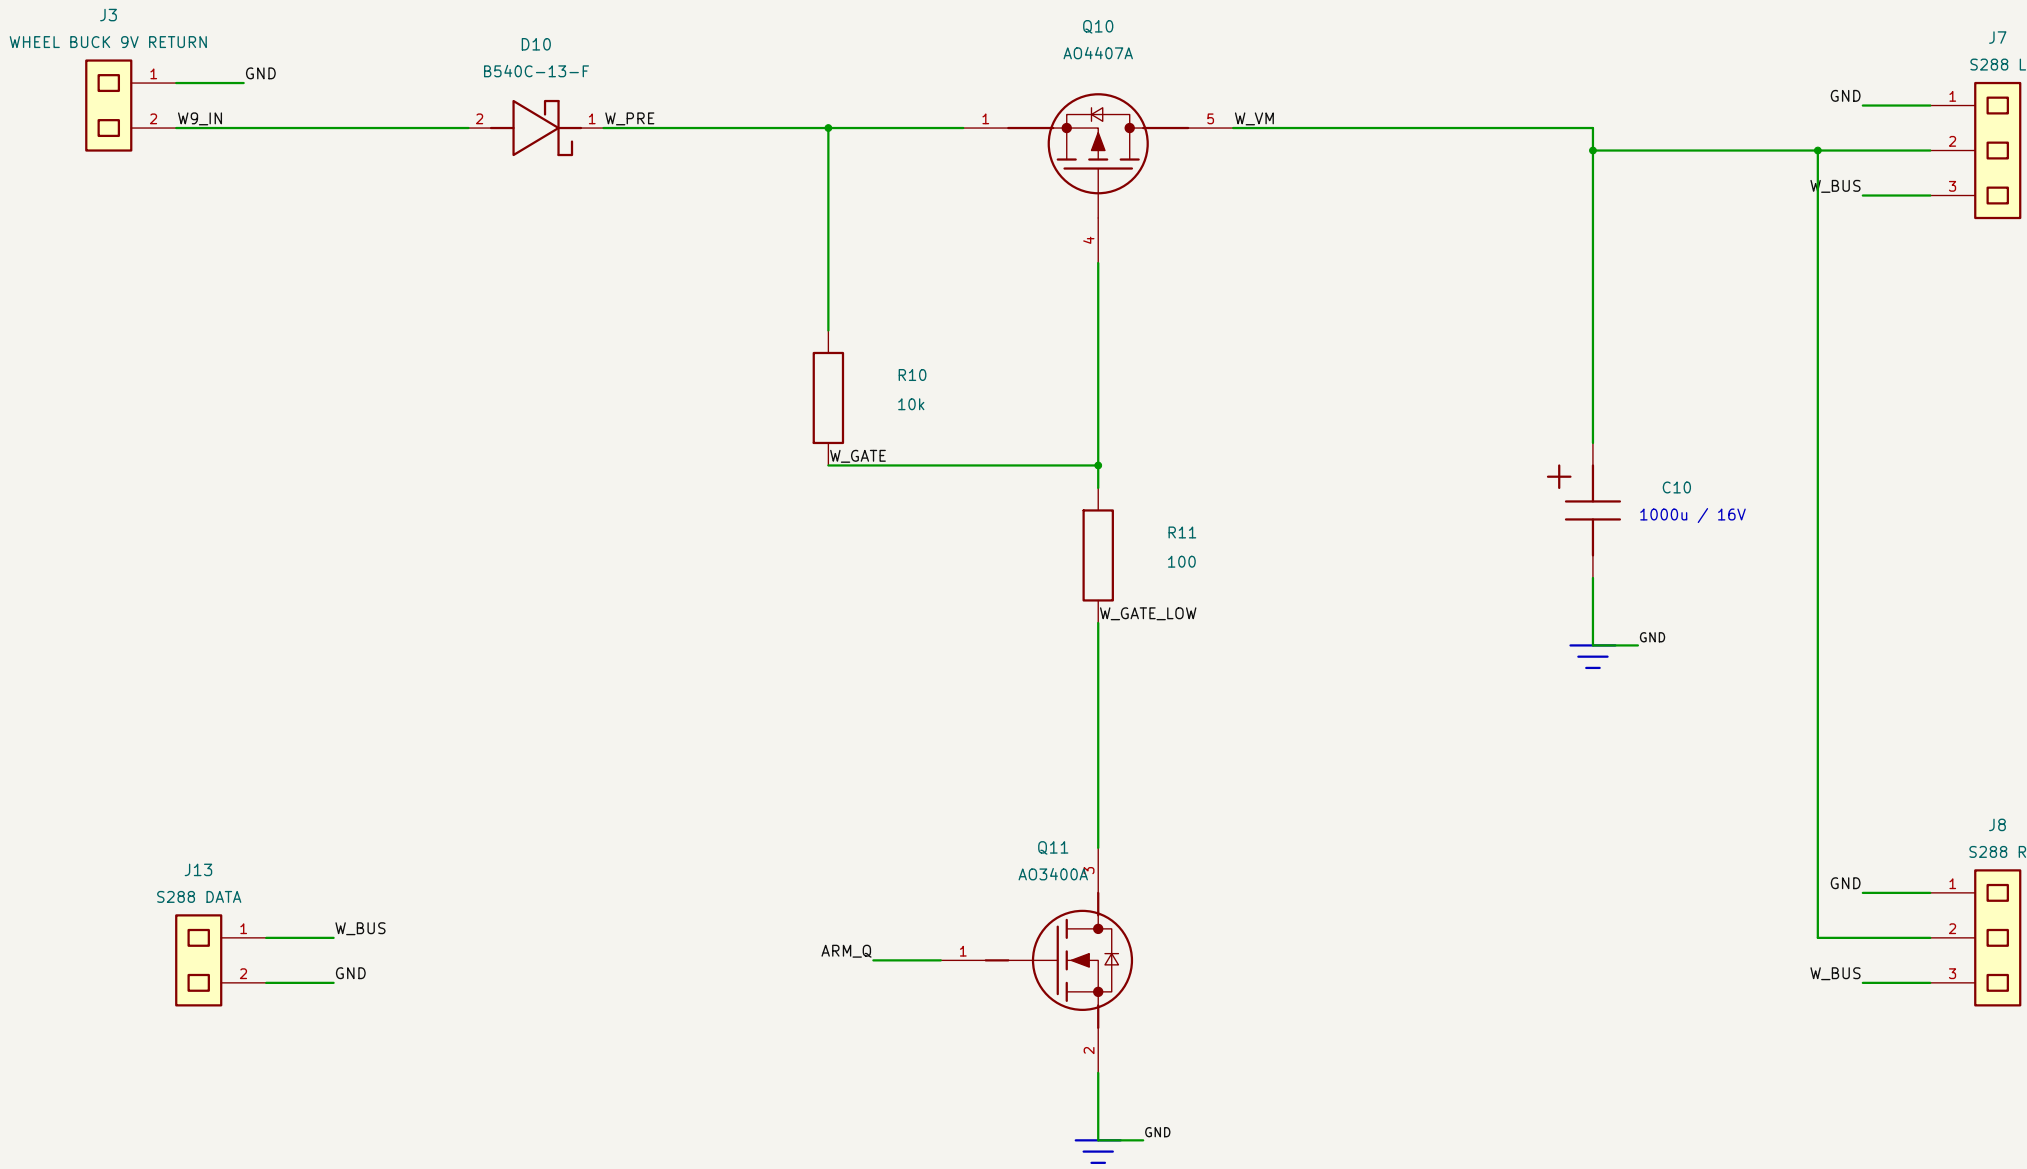




External buck return. Inrush, brake energy and thermal performance: NOT_TESTED.

04 Head 6 V conditioning

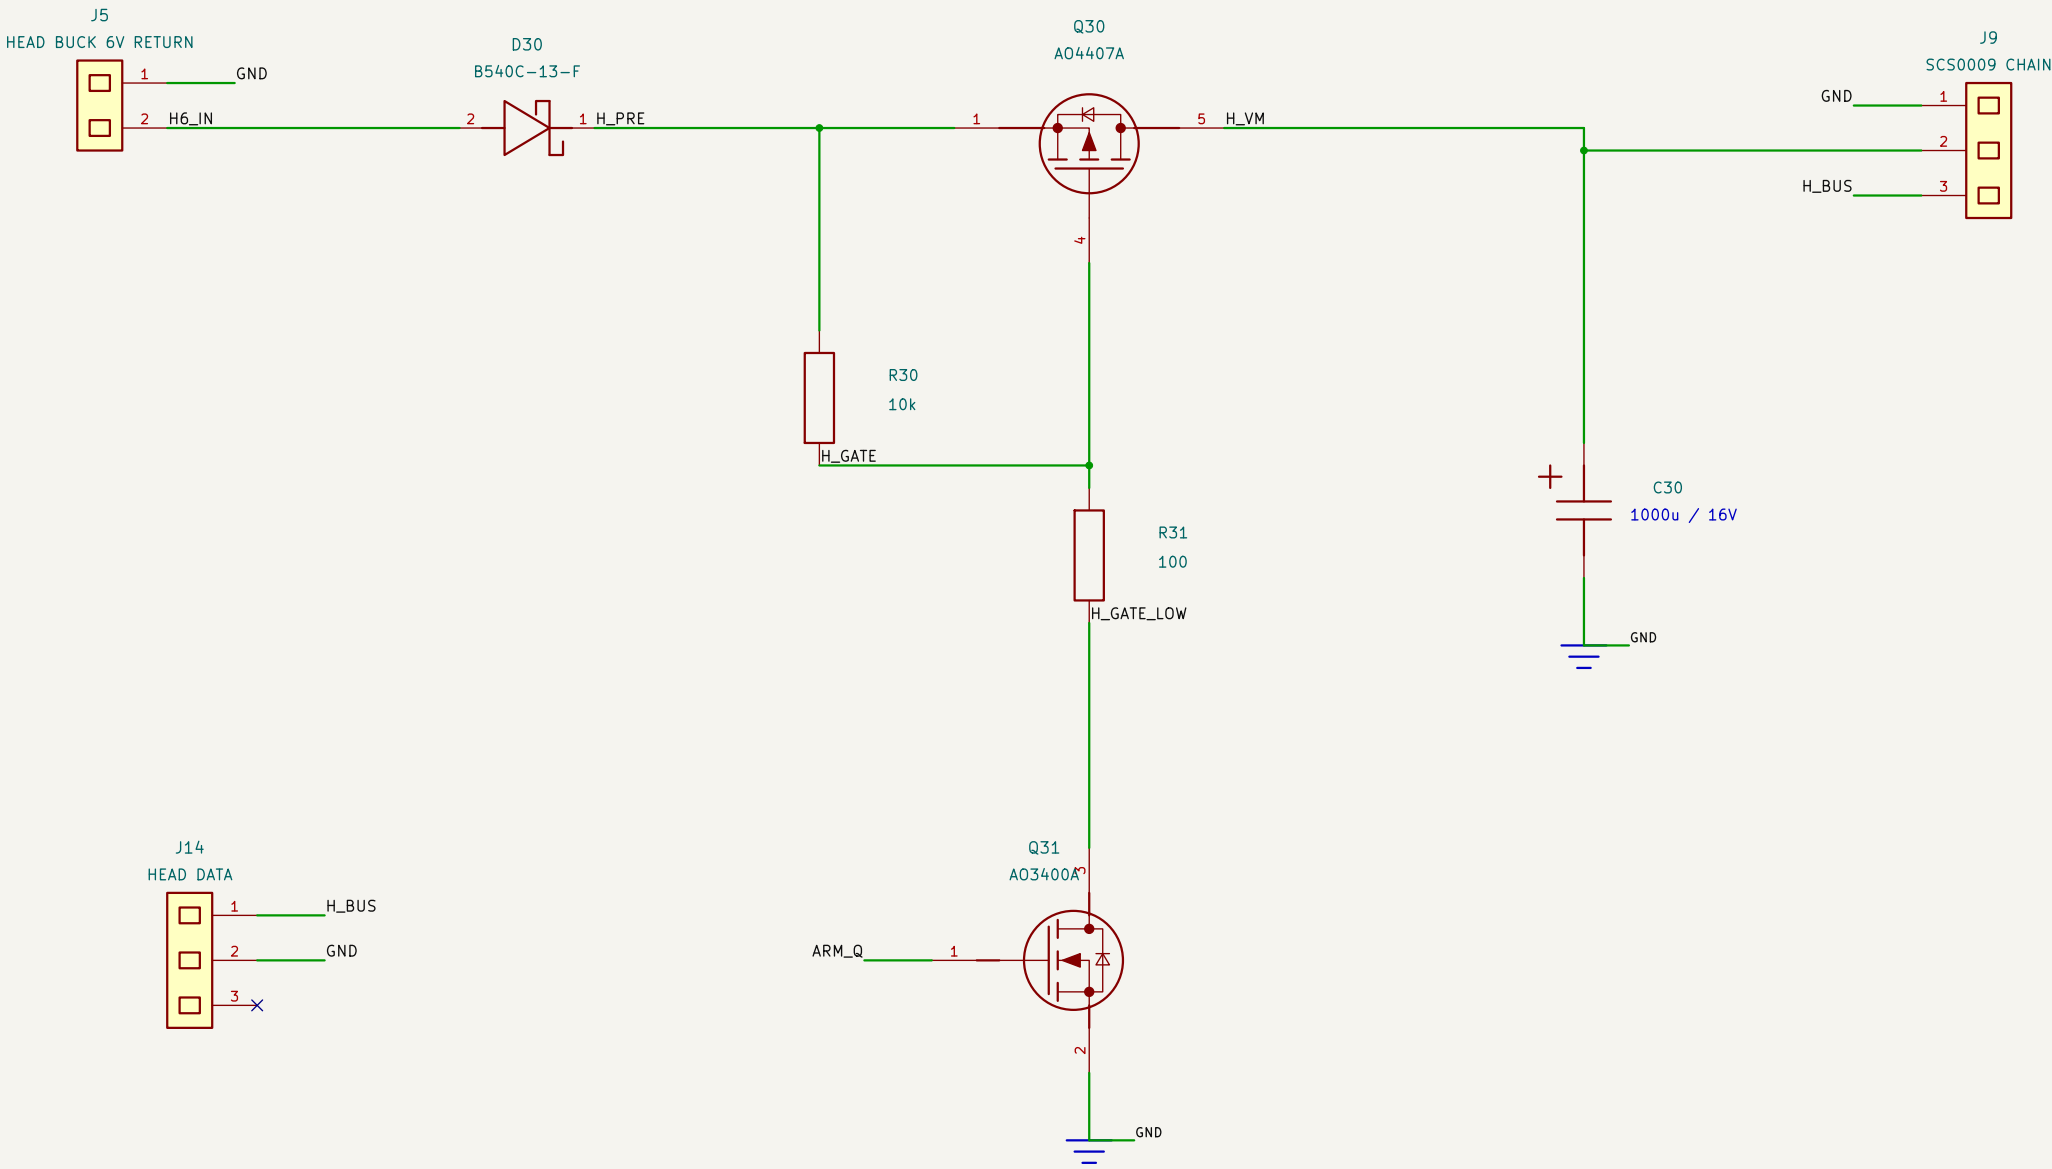


External buck return. Inrush, brake energy and thermal performance: NOT_TESTED.

05 External converter input distribution

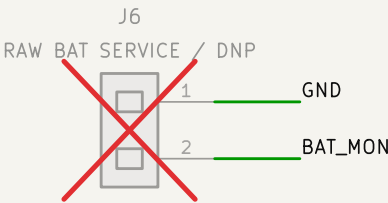


J2 -> external9V; J4 -> external6V. J6 is RAW BAT service, DNP. See blocks11/12 for logic5V.

06 Wheel rail / brake and overvoltage

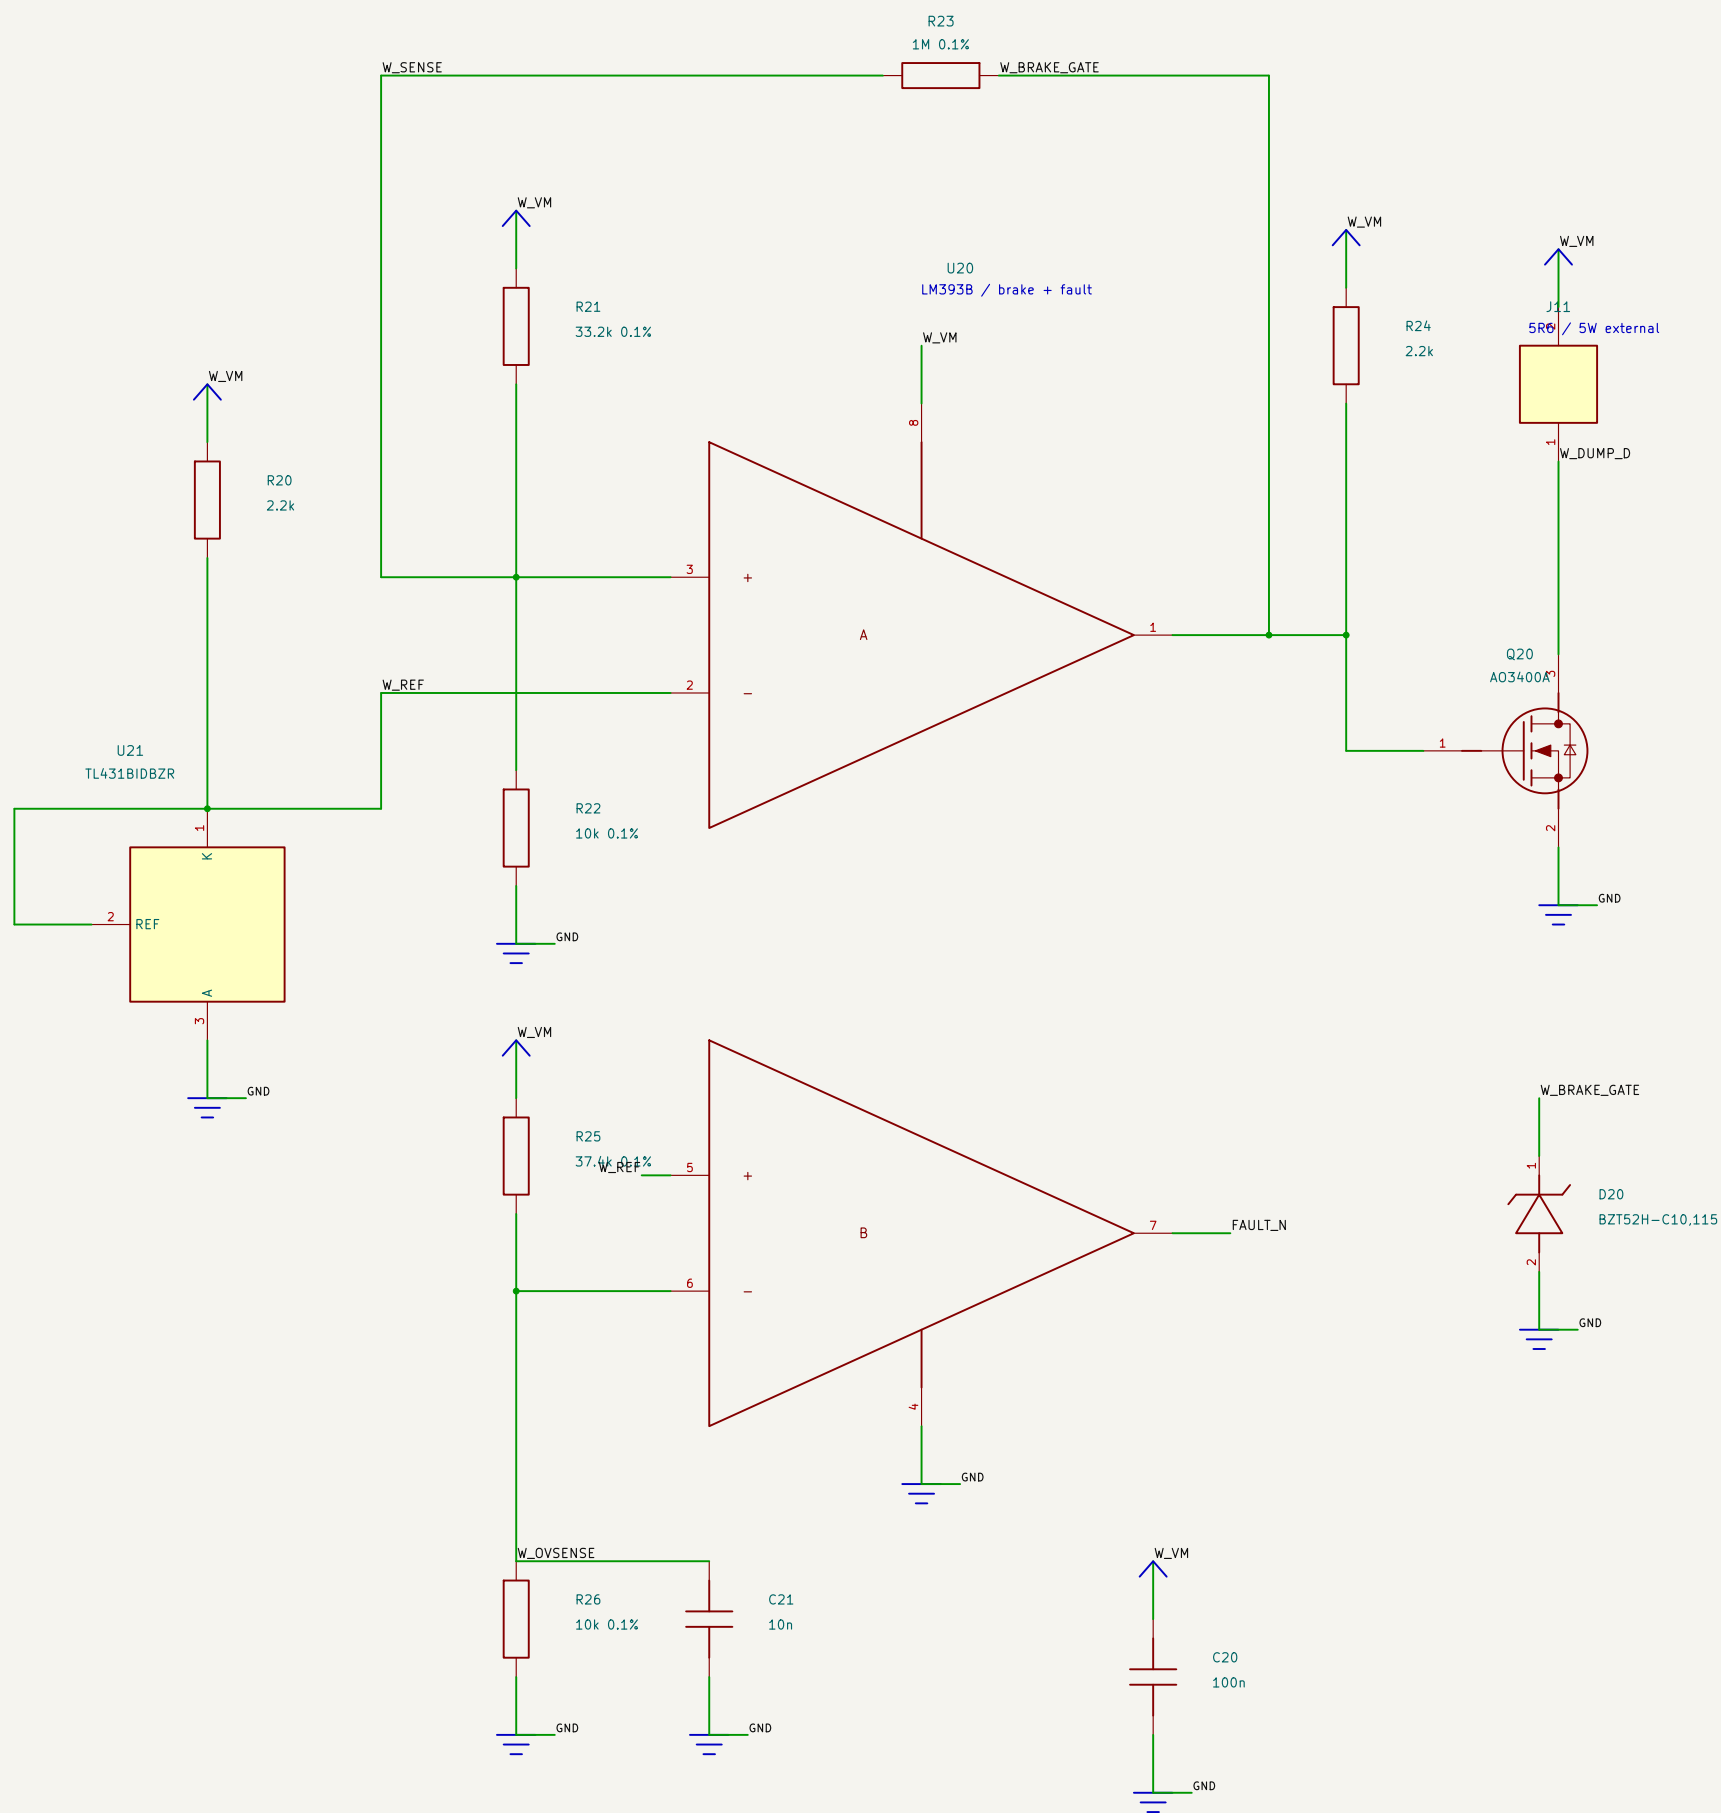


Two comparators share one LM393B. External dump resistor needs pulse qualification.

07 Head rail / brake and overvoltage

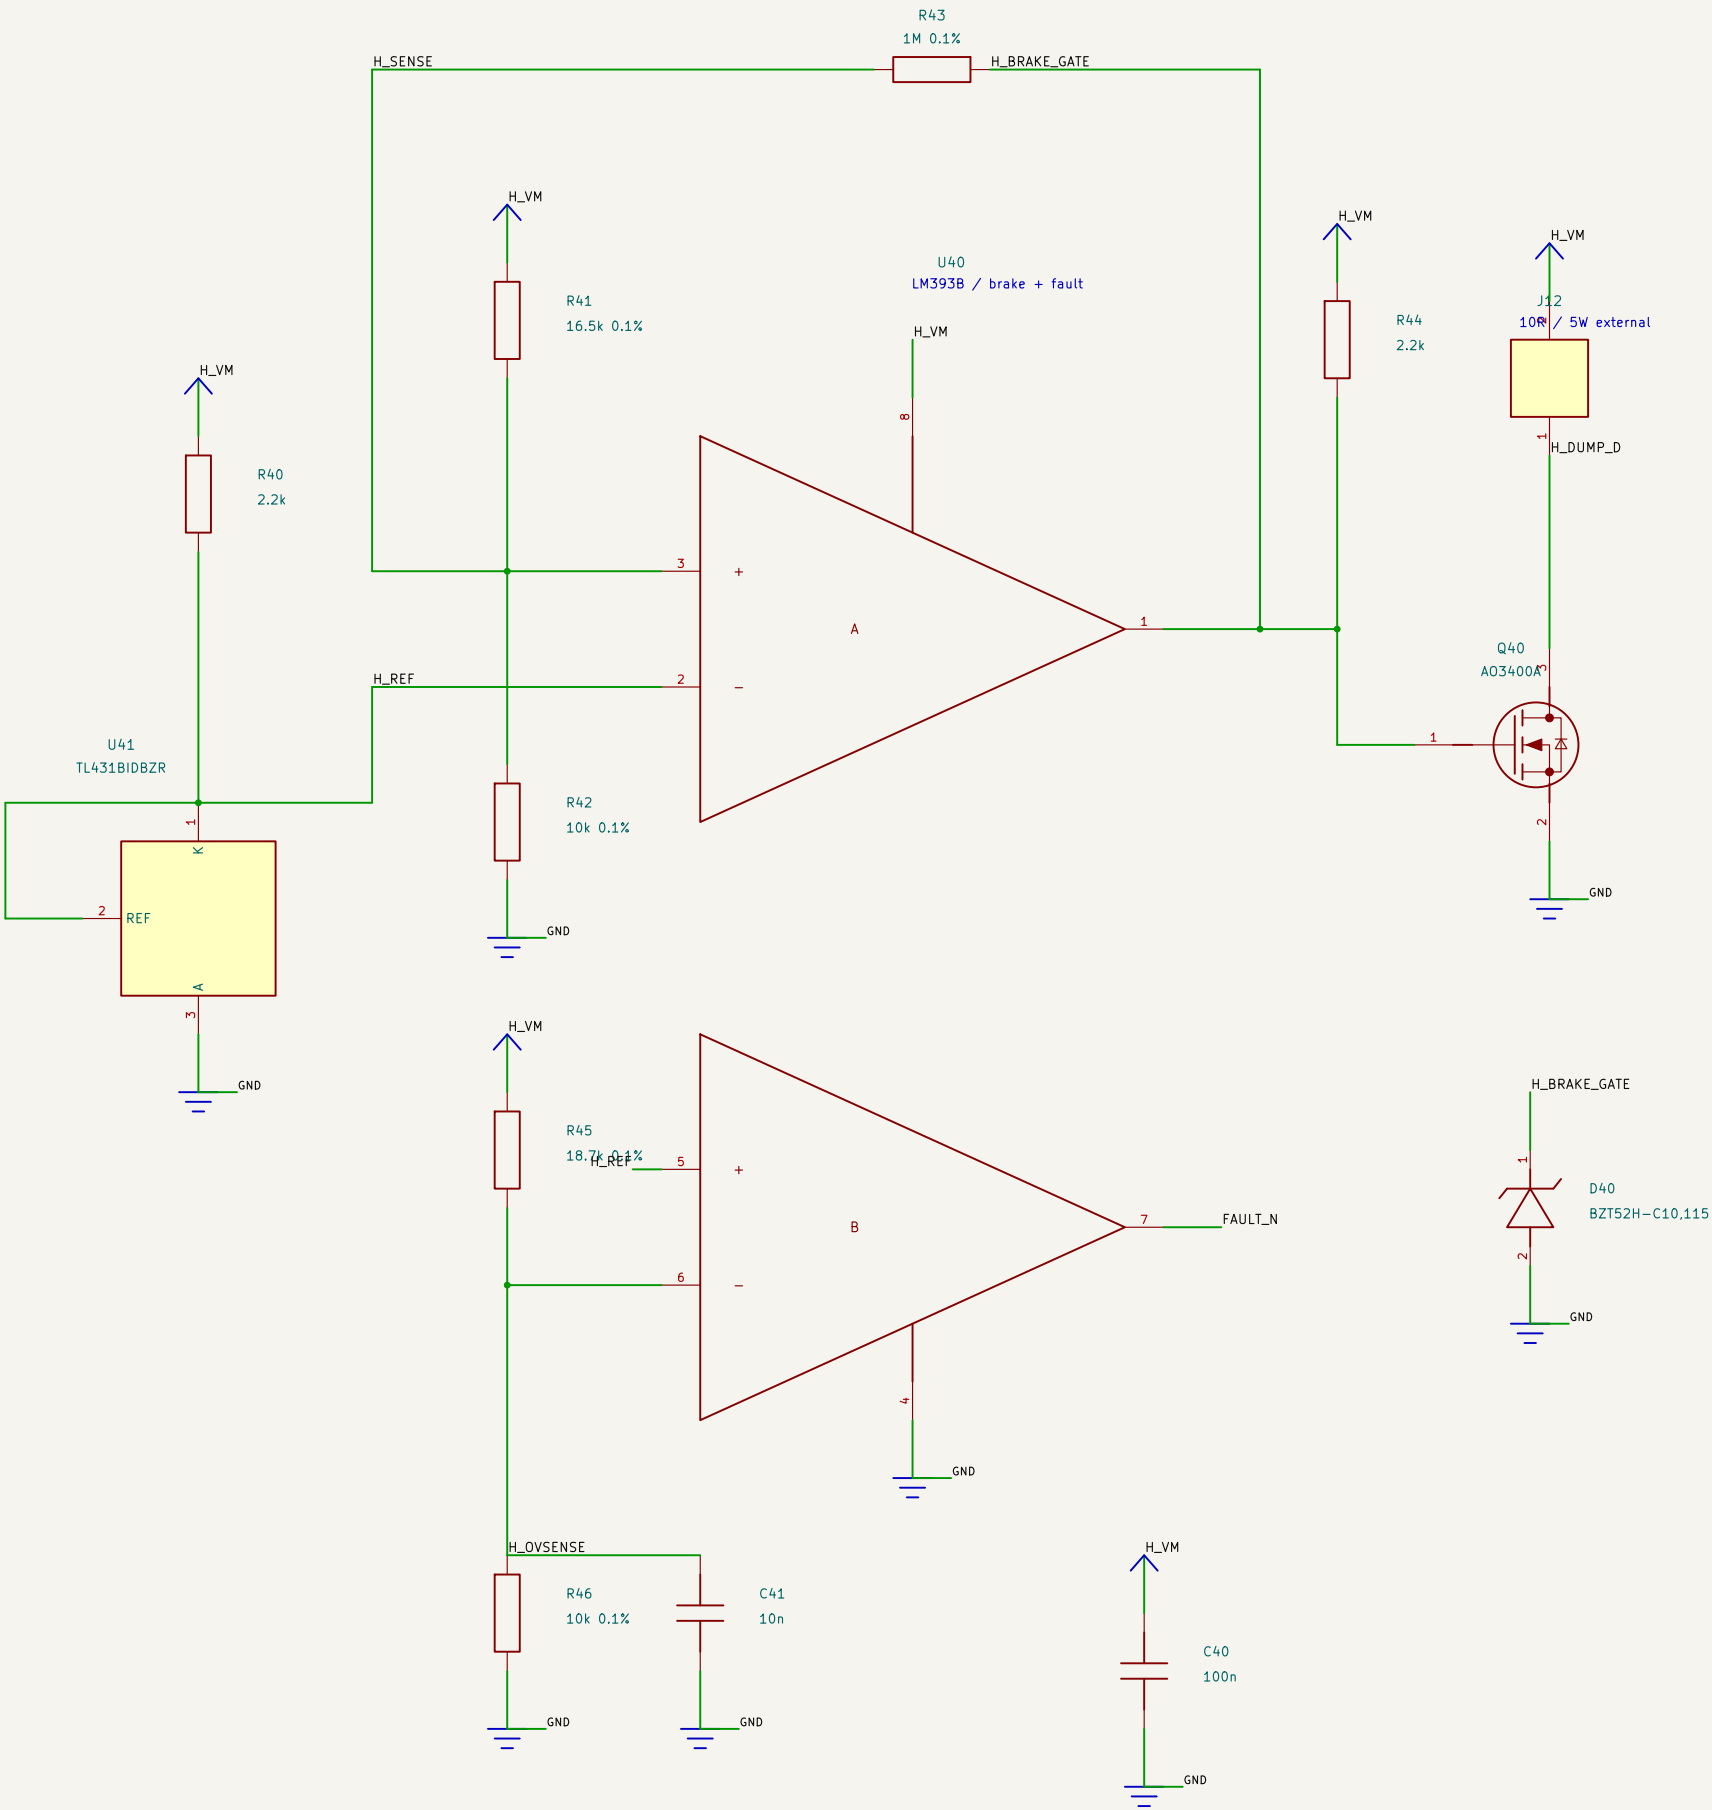


Two comparators share one LM393B. External dump resistor needs pulse qualification.

08 Voltage monitor / motion connector

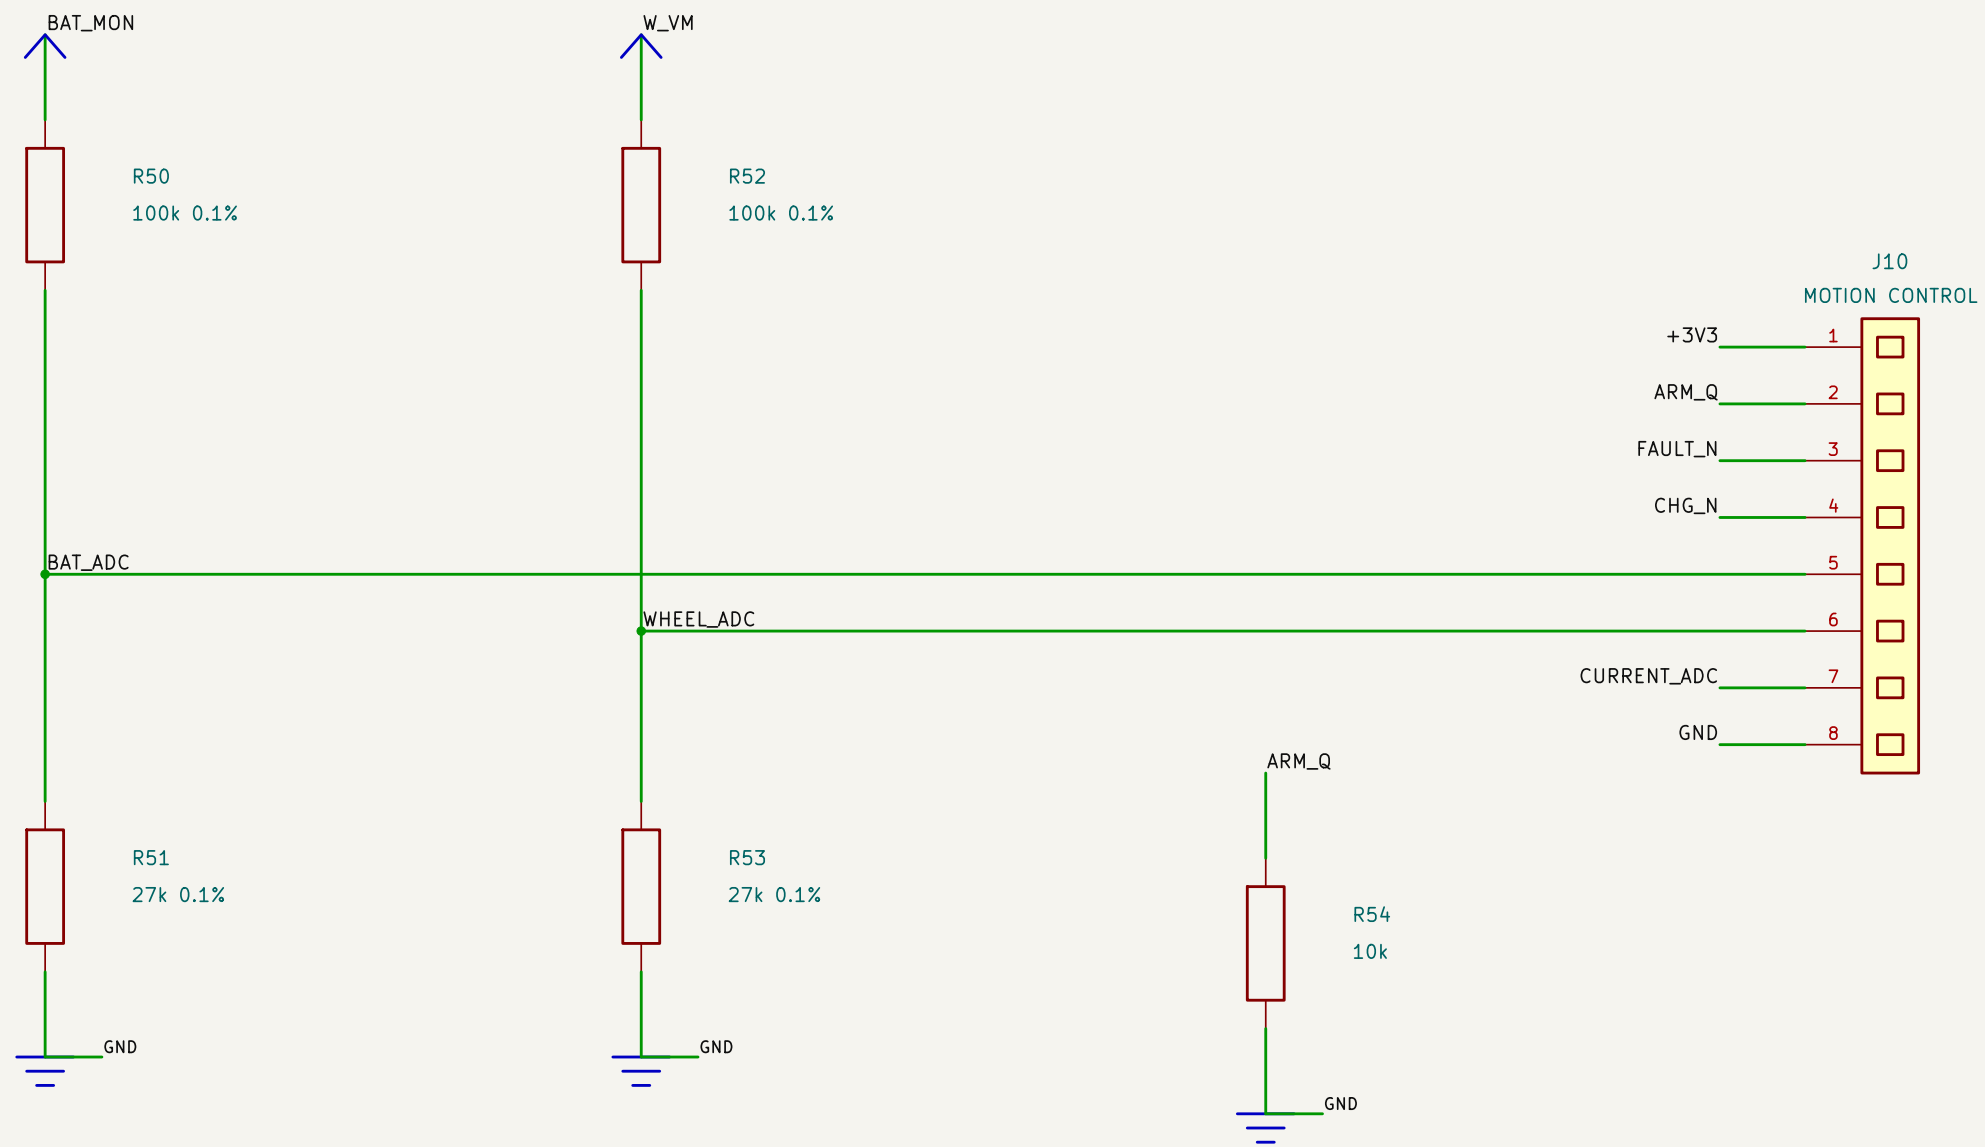


Divider ratio 27 / 127. Current_ADC comes from block 02.

09 Charge insertion / VBUS sense

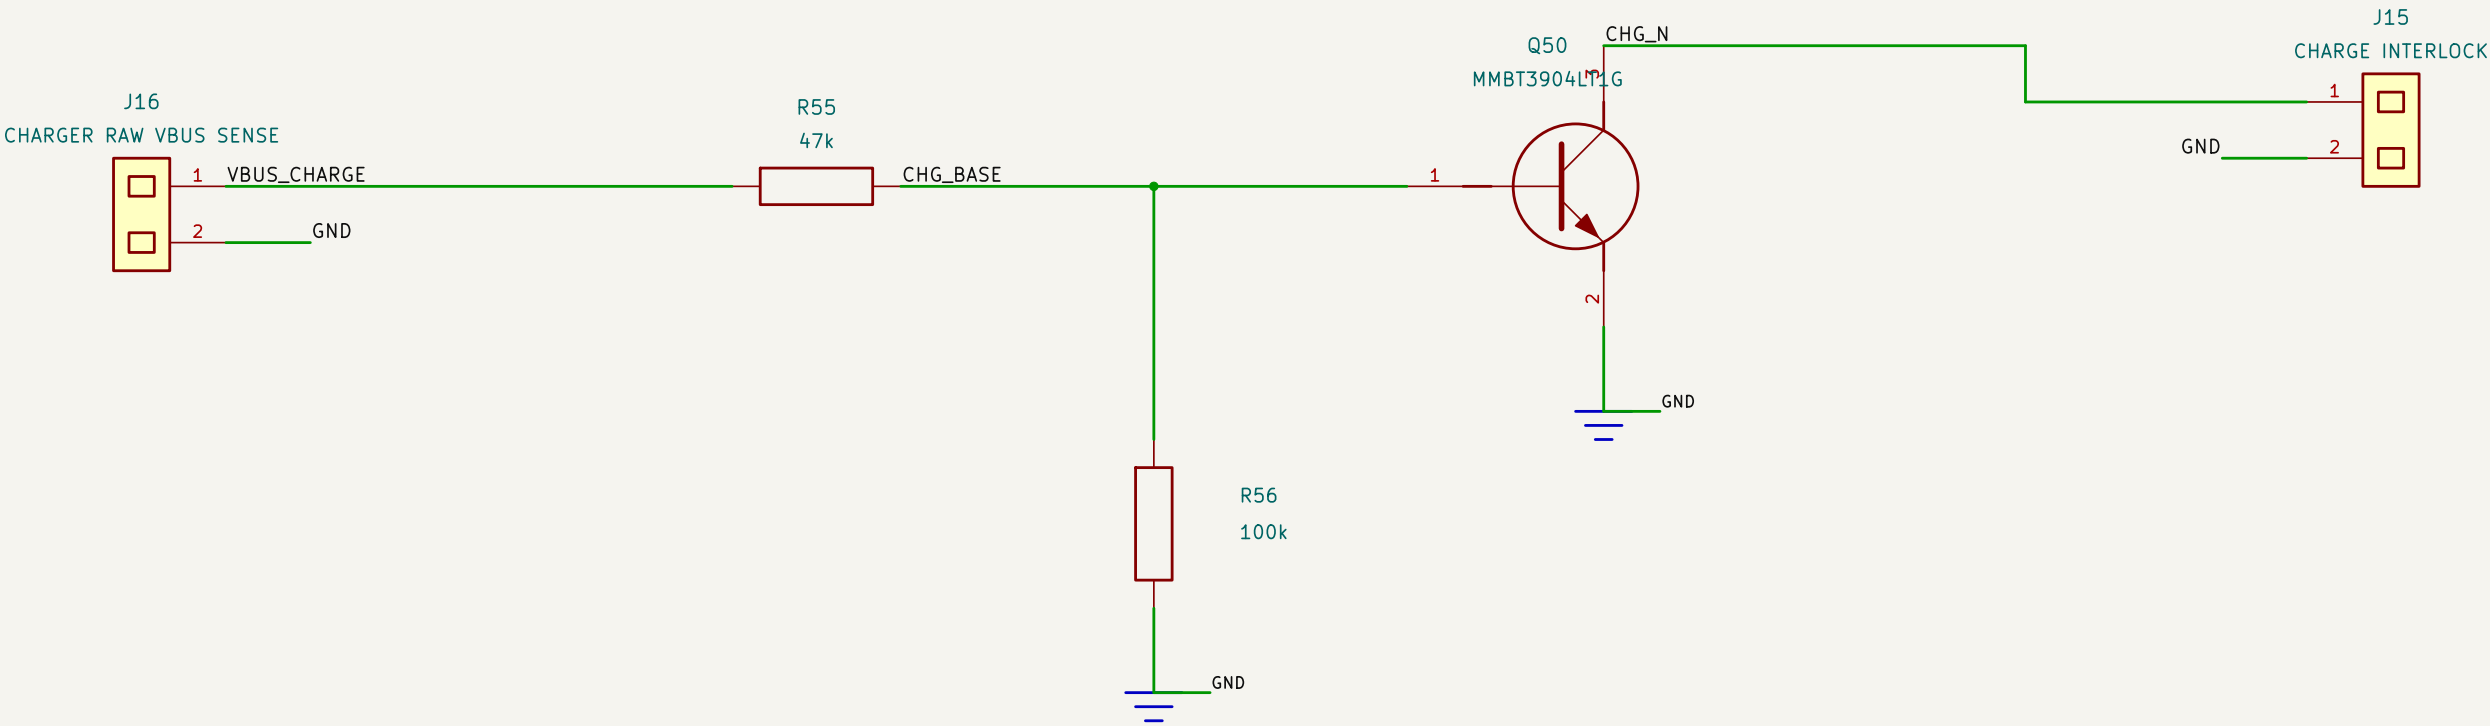

Sense and interlock only; no CC / PD / CC-CV charger implementation.

10 Supply boundaries / board mounting

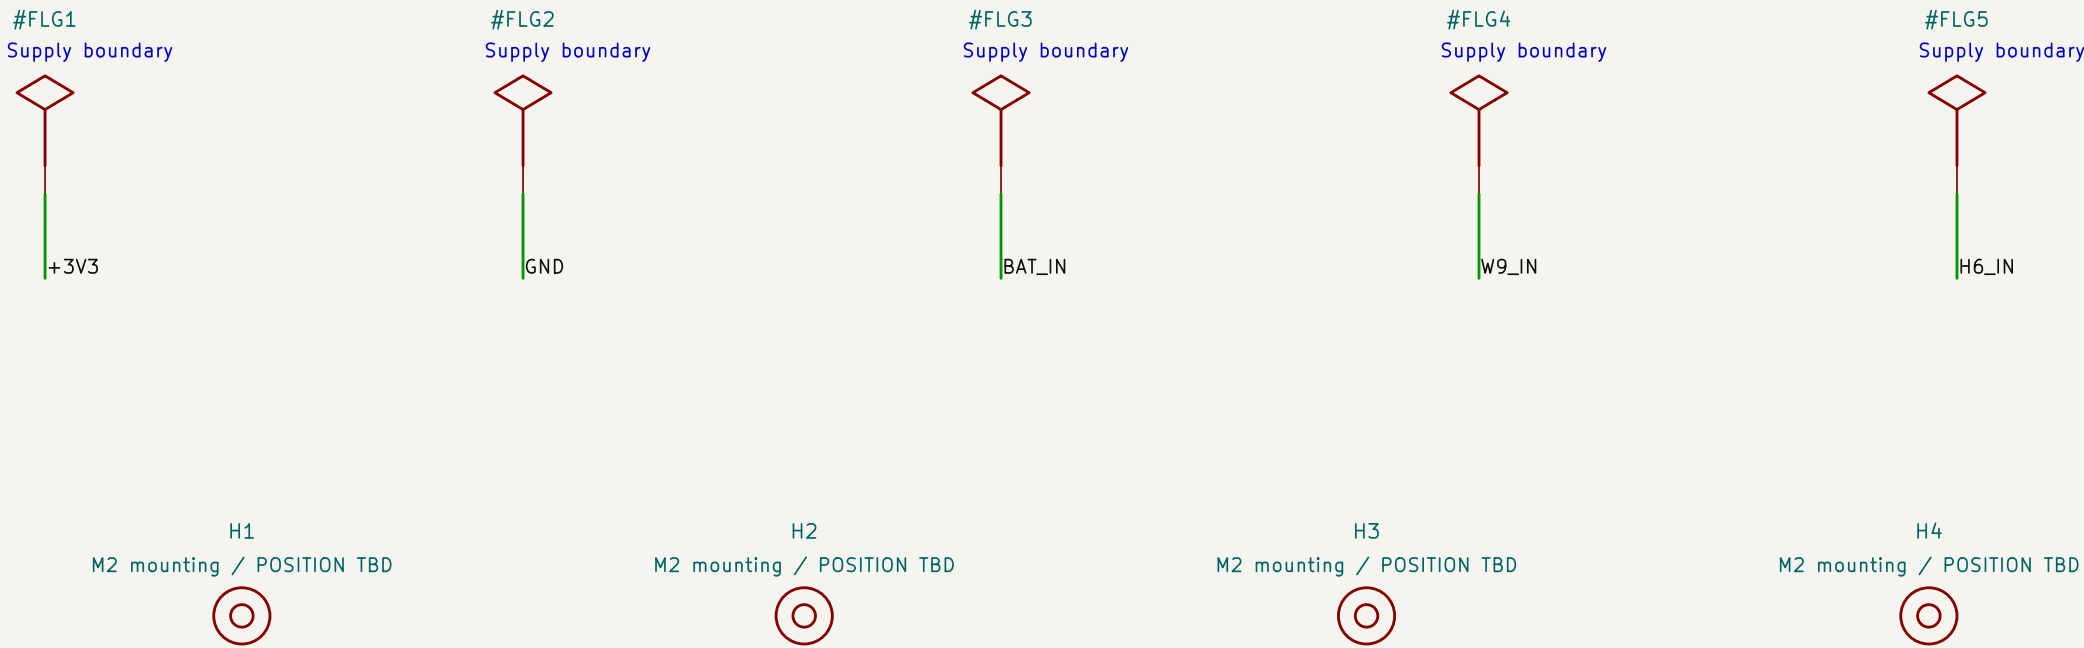

Board outline / mounting coordinates UNFROZEN. P2 PCB does not implement blocks11/12.