# SPECIFICATION FOR APPROVAL

| | |
|---|---|
| 客戶(Customer)： | |
| 客戶料號(Customer P/N)： | |
| 型號(Supplier P/N)： | XHXDZ-3525-4Ω3W-2P1.25 |
| 產品名稱(Description)： | 喇叭 (Speaker) |
| 產品規格(Specification)： | 腔体喇叭 1.25 端子线 |

# 产品规格内容

## 1、SCOPE 范围


This specification applies speaker, **XHXDZ-3525-4Ω3W-2P1.25**

## 2、SPECIFICATION 规格


| | | |
|---|---|---|
| 1 | Size | 35mm ×25mm×H6.8mm |
| 2 | Power Rating | RATED POWER INPUT 2.5W MAX POWER INPUT 3.0W |
| 3 | Impedance | 4 Ohm ±15% at 1kHz 3.46V |
| 4 | Resonance Freq | 980Hz±20% at 1.0V |
| 5 | S.P.L | 88dB±3dB/2.5W/0.1m at 800Hz,1000Hz, 1200Hz,1500Hz average |
| 6 | Response | Fo—20 KHz, deviation –10dB max. |
| 7 | Distortion | 5% max, at 1kHz 2.5W |
| 8 | Magnet | Nd-Fe-B（、、、、） |
| 9 | Operation Test | Must be normal at program source 2.0V |
| 10 | Polarity | When a positive D.C voltage is applied to the terminal Marked(+)or red the diaphragm should move to the front. |
| 11 | Terminal Strength | Capable of withstand a 500g load for 3sec.<br>Without resulting in any damage or rejection. |
| 12 | Terminal<br>Soldering Test | Speaker shall continue to operate after 10 sec. Stabilization test condition Suppling lead wire and solder on the terminal board and maintaining for 2seconds at temperature of 290—320°c by hand iron |
| 13 | Appearance | Should mot exist any kind of obstacle to be harmful to normal operation, not any remarkable damages, cracks, rust and distortions which may cause malfunction. |
| 14 | Marking | |
| 15 | Envirnmental<br>Protection Regulation | ROHS |

# 产品规格内容

## 3、TYPICAL FREQUENCY RESPONSE CURVE　　频率响应曲线

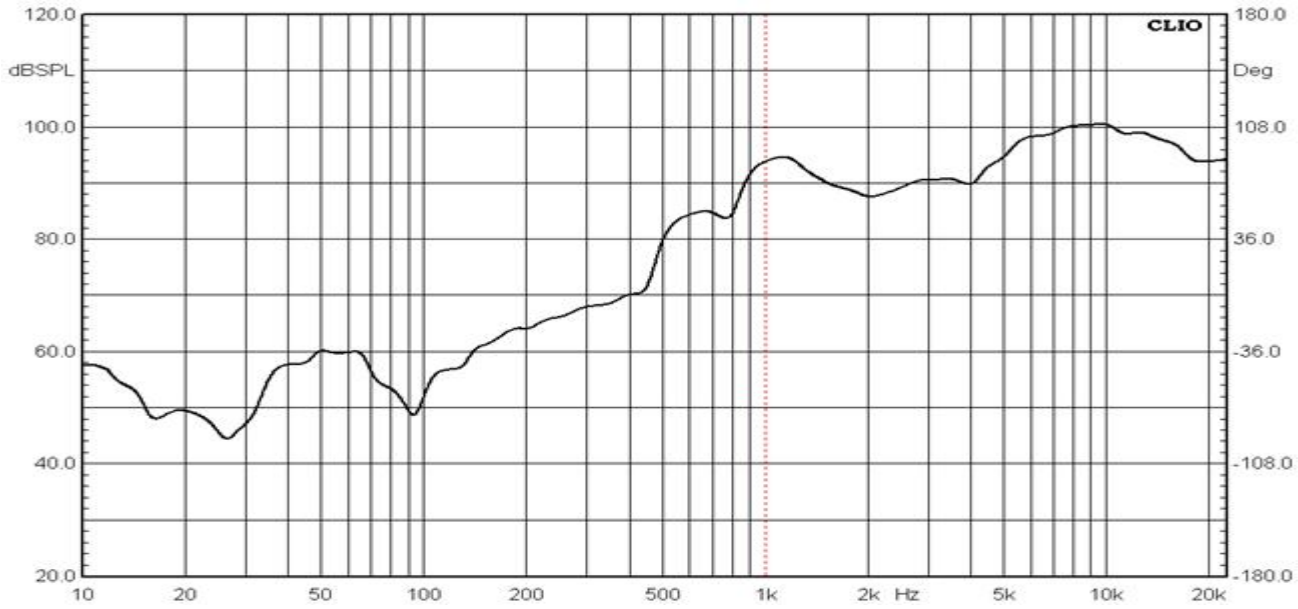


## 4、MEASUREMENT CIRCUIT　测量线路

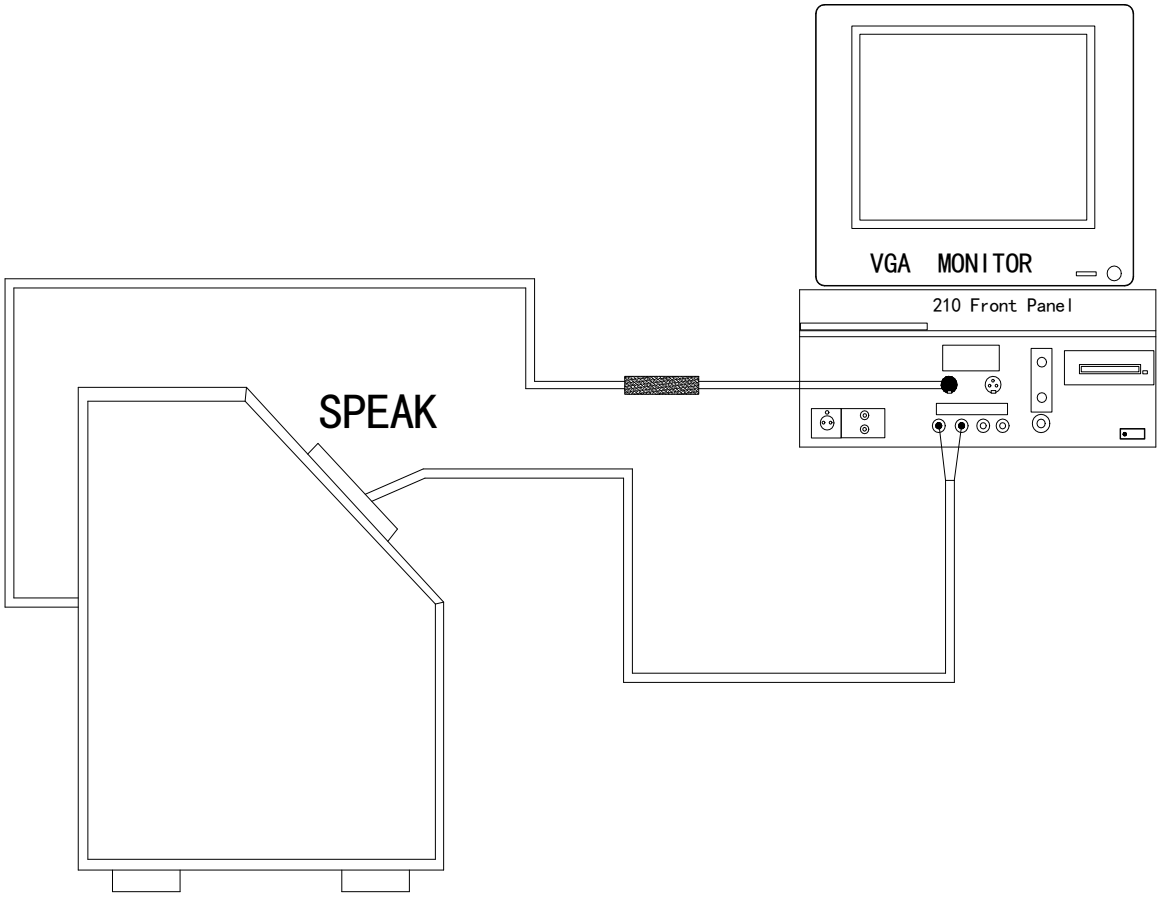



测试专用箱

# 产品规格内容

## 5、MECHANICAL CHARACTERISTICS　机械特性

| NO | Item | Test condition | Evaluation standard |
|---|---|---|---|
| 1 | Vibration Test | Speaker shall be measured after being applied vibration of amplitude of 1.5mm with 10 to 55Hz band of viration frequency to each of 3 per-pendicular directions for 2 hours. | No obstacle to be harmful to mormal operation ; Damages,cracks,rusts and distortions. Should not be audible at 2.83V sine wave between FO~4.0kHz |
| 2 | Drop Test | Drop the speakers contained in normal box onto the board 40mm thick 10 times from the height of 75cm | |

## 6、ENVIRONMENTAL TEST　环境试验
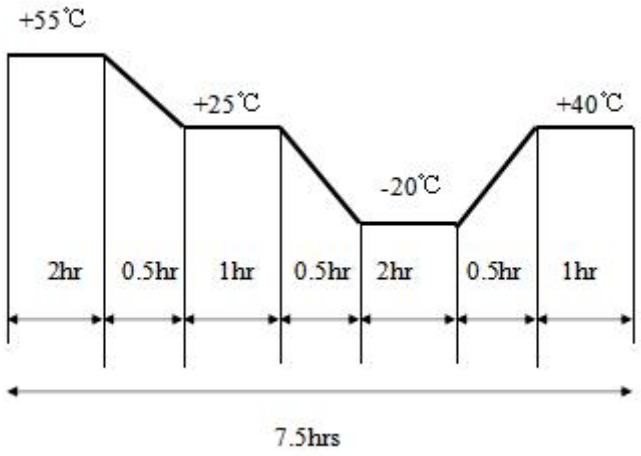
| No. | Item | Test conditions | Evaluation standard |
|---|---|---|---|
| 1 | High temp. test | After being placed in a chamber at +55℃ for 96 hours. | Being placed for 6 hours at +25℃,receiver shall be measured. No obstacle to be harmful to normal operation ;damages, cracks, rusts and distortions, should not be audible at2.83Vsine wave between Fo~4.0KHz. S.P.L. deviation of unit should be within ±3dB. |
| 2 | Low temp. test | After being placed in a chamber at －25℃ for 96 hours. | |
| 3 | Humidity test | After being placed in a chamber at +40℃and 90±5% relative humidity for 96 hours. | |
| 4 | Temp. cycle test | The part shall be subjected to 6 cycles. One cycle shall be consist of :   | |

# 产品规格内容

## 7、RELIABILITY TEST 信赖性试验

| NO | Item | Test conditions | Evaluation standard |
|---|---|---|---|
| 1 | Load test | 1W white noise is applied for 24 hours,at room temp. | Being placed for 1 hours at +25℃,speaker shall be measured,No obstacle to be harmful to normal operation;damages,cracks,rusts,etc.should not be audible at 2.83v sine wave between Fo~4.0KHz.Fo should meet intial one.S.P.L.deviation of unit should be within± 3dB |

TEST CONDITION

Standard Test Condition : a) Temperature：+0.5~+35℃ b) Humidity；45~85% c) Pressure；860-1060mbar

Judgement Test Condition: a) Temperature；+25±2℃ b) Humidity；60-70% c) Pressure；860-1060mbar

## 8、APPEARANCE DRAWING 外观尺寸图

