

**Engineering progress
Enhancing lives**


RAUVISIO House

Product training



Agenda

1. Our story and introduction
2. RAUVISIO brilliant
3. RAUVISIO crystal
4. RAUVISIO noir
5. RAUVISIO shade
6. RAUVISIO terra
7. RAUVISIO ingrain
8. RAUVISIO ferro
9. Additional RAUVISIO program options
10. Edgeband
11. Online tools

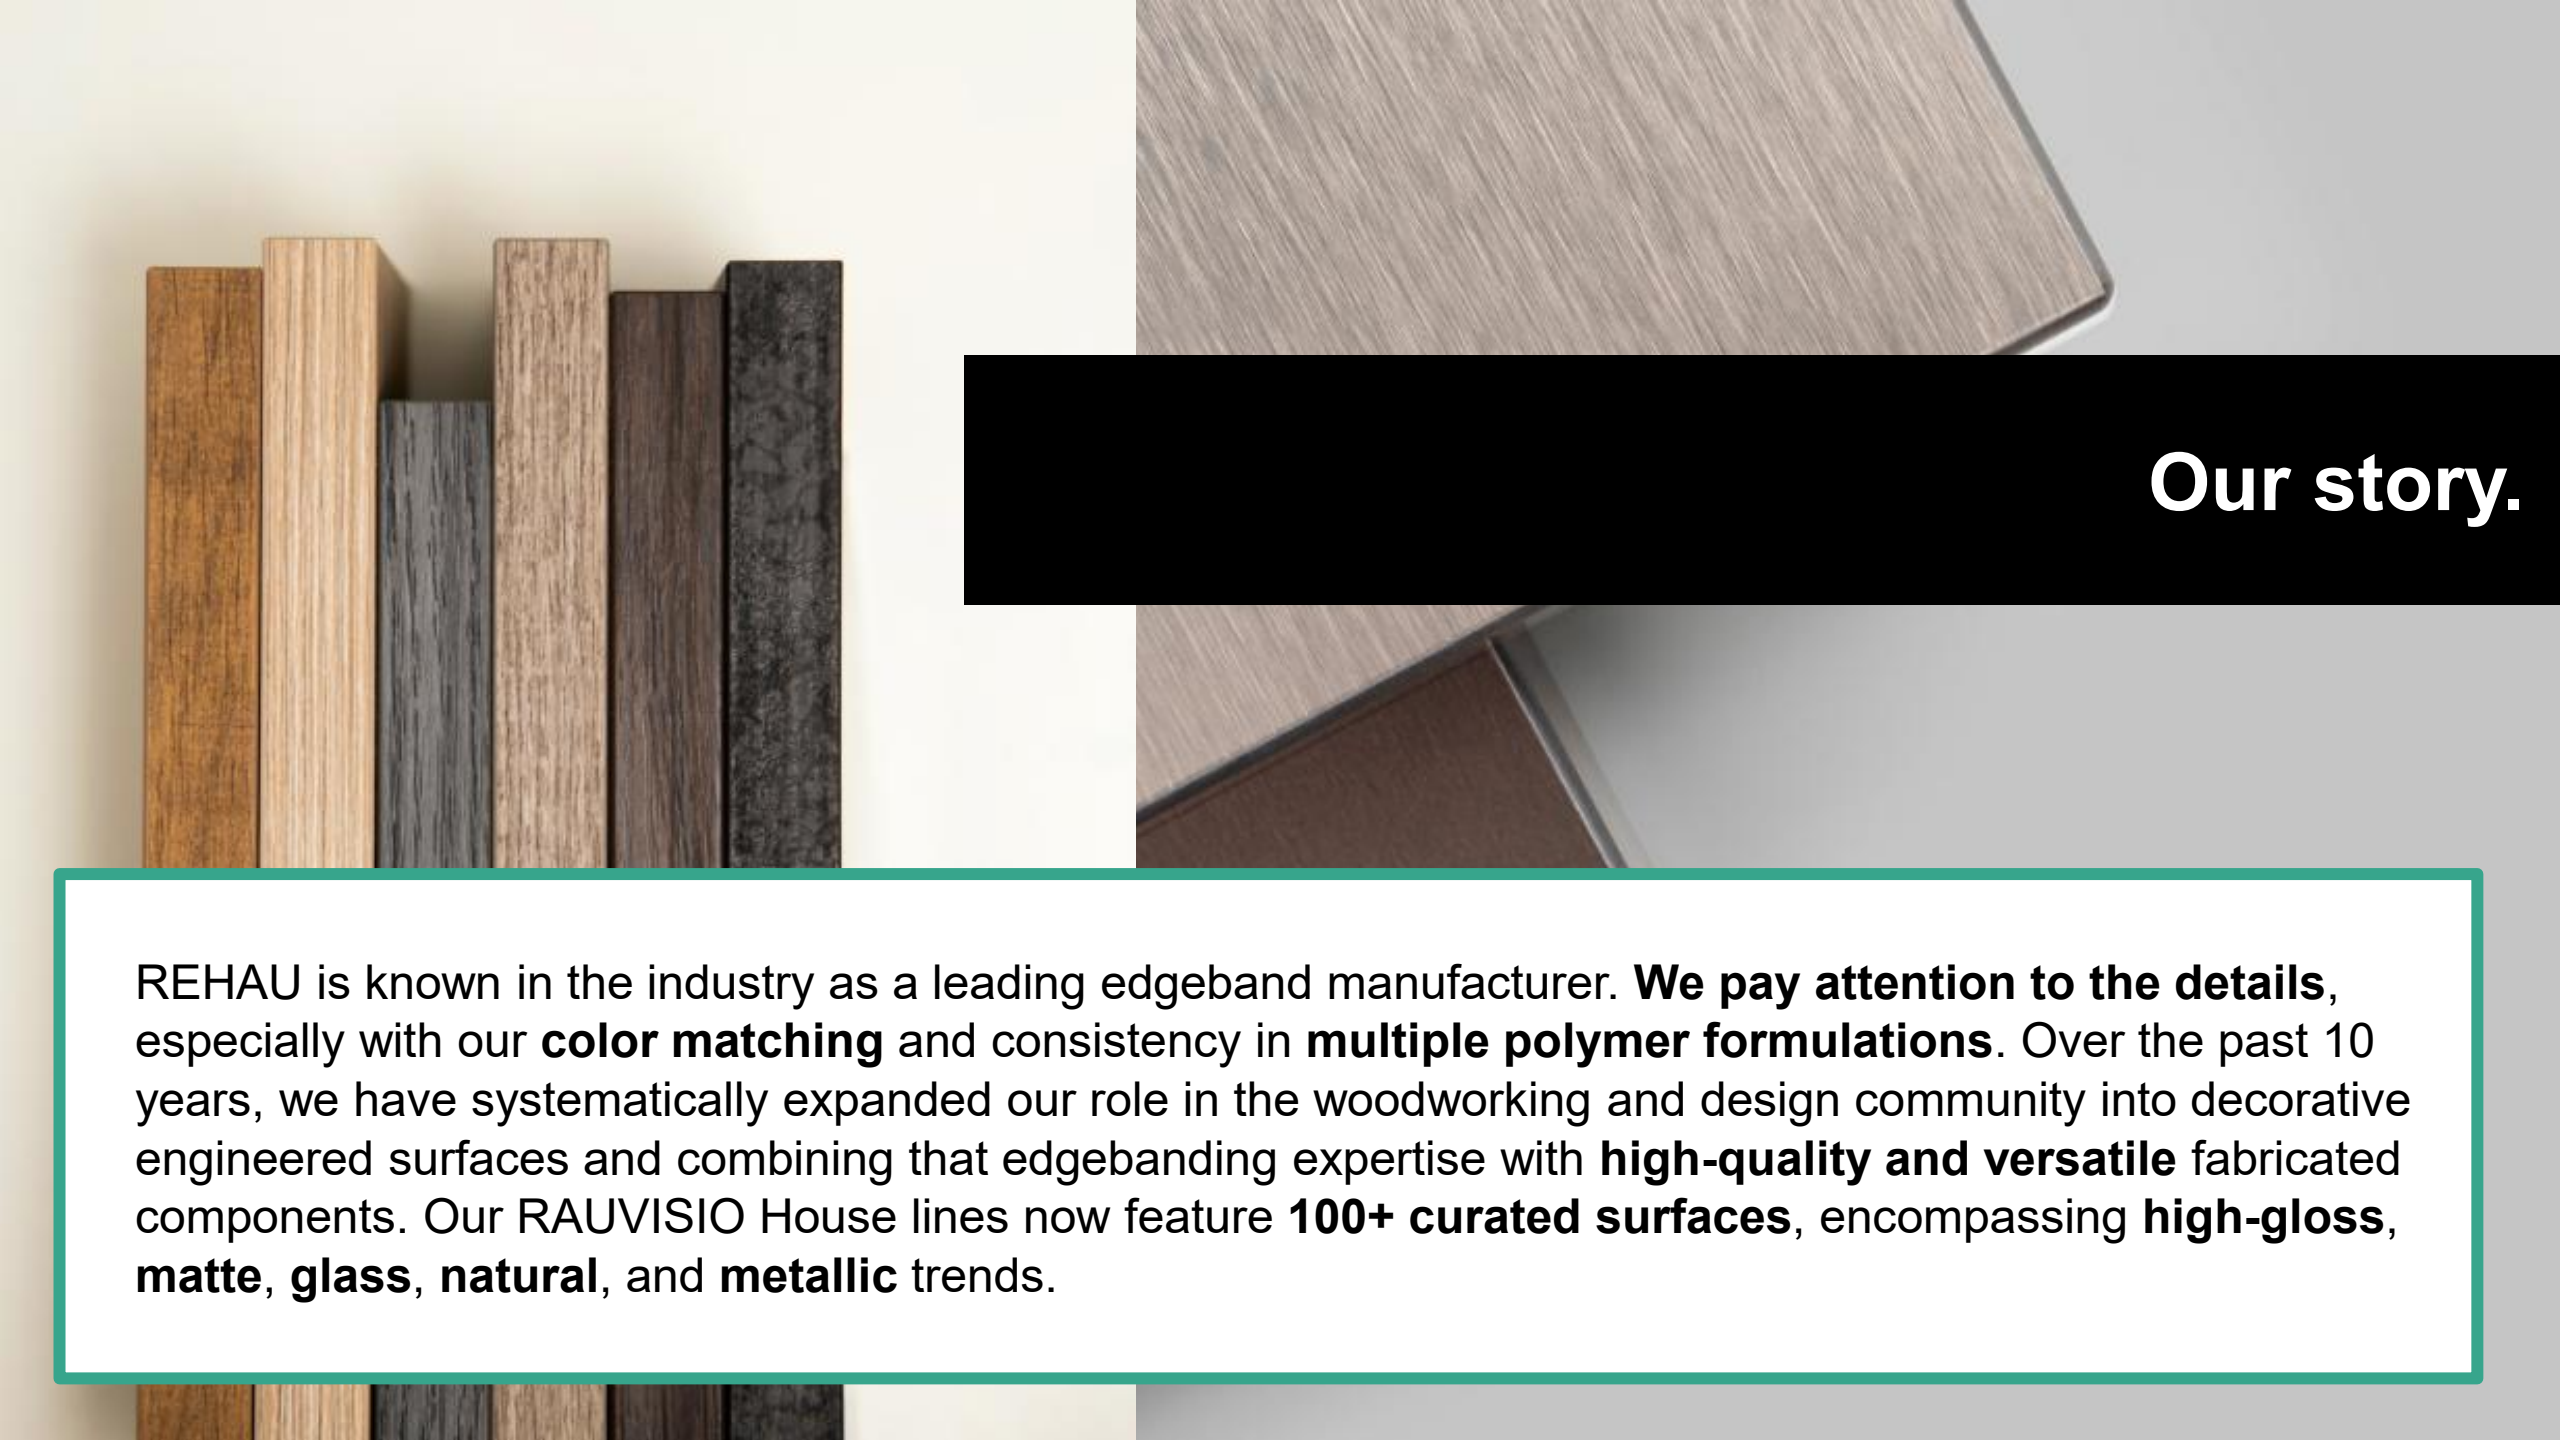

Our story.

REHAU is known in the industry as a leading edgeband manufacturer. **We pay attention to the details**, especially with our **color matching** and consistency in **multiple polymer formulations**. Over the past 10 years, we have systematically expanded our role in the woodworking and design community into decorative engineered surfaces and combining that edgebanding expertise with **high-quality and versatile** fabricated components. Our RAUVISIO House lines now feature **100+ curated surfaces**, encompassing **high-gloss, matte, glass, natural, and metallic** trends.


RAUVISIO House lines

From gloss to matte, crystal, natural and metal, each line is curated to be a classic of modern living and human-made for precision and permanence.

A kitchen featuring RAUVISIO brilliant cabinets with a highly reflective, glossy finish. The cabinets are a light, neutral color, and the image shows a close-up of the upper and lower units. The reflective surface clearly mirrors the surrounding environment, including a white vase on the countertop.

RAUVISIO brilliant™

Inspired by water, this surface reflects its surroundings with intense color depth.

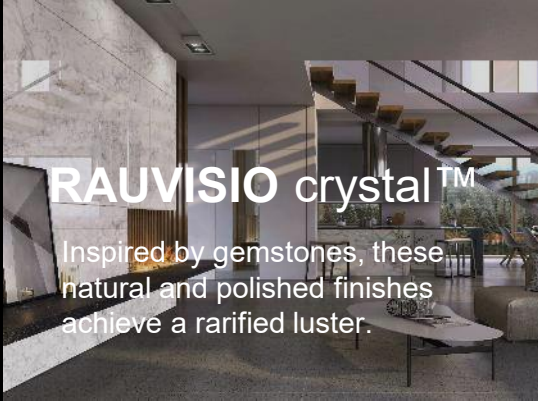A modern living and dining area featuring RAUVISIO crystal surfaces. The surfaces have a natural, polished, and slightly textured appearance, resembling gemstones. The space includes a staircase with a glass railing and a contemporary coffee table.


RAUVISIO crystal™

Inspired by gemstones, these natural and polished finishes achieve a rarified luster.

A kitchen interior featuring RAUVISIO noir cabinets. The cabinets are a dark, matte finish, contrasting with a brick wall in the background. The space is lit with warm, ambient lighting, and the overall aesthetic is modern and sophisticated.


RAUVISIO noir™

Inspired by film noir, this resilient self-healing surface reflects timeless elegance.

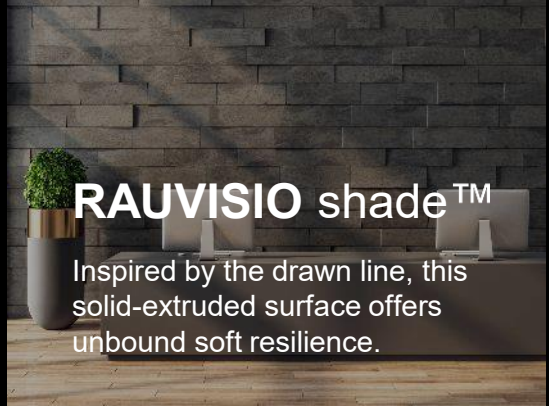A kitchen featuring RAUVISIO shade cabinets. The cabinets have a solid-extruded, matte finish that mimics the texture of stone. The background wall is made of dark, stacked stone, creating a cohesive and textured look.


RAUVISIO shade™

Inspired by the drawn line, this solid-extruded surface offers unbound soft resilience.

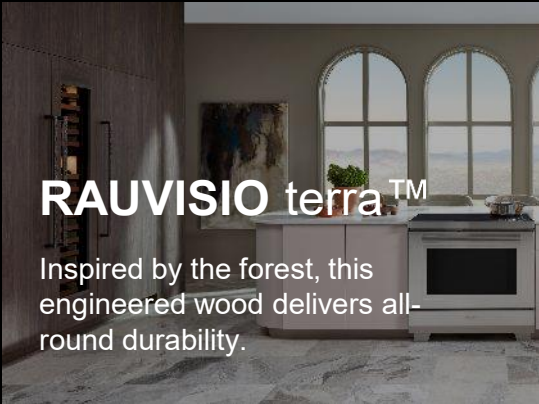A kitchen featuring RAUVISIO terra cabinets. The cabinets are made of engineered wood with a natural, light-colored finish. The space is bright, with large arched windows in the background and a modern oven integrated into the cabinetry.


RAUVISIO terra™

Inspired by the forest, this engineered wood delivers all-round durability.

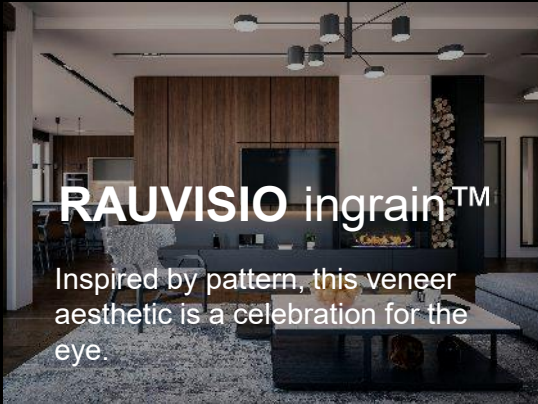A living room featuring RAUVISIO ingrain surfaces. The surfaces have a patterned veneer that creates a rich, textured aesthetic. The room includes a modern sofa, a coffee table, and a large window with a view of the outdoors.

RAUVISIO ingrain™

Inspired by pattern, this veneer aesthetic is a celebration for the eye.

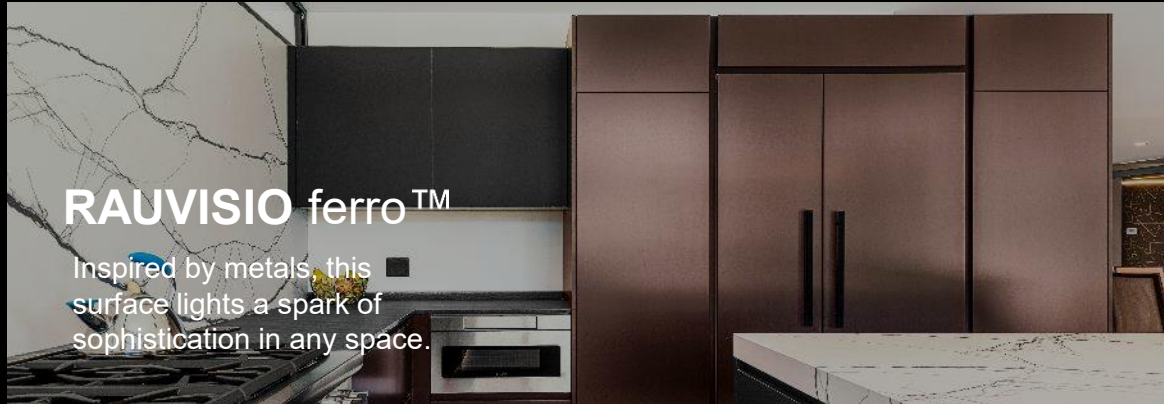A kitchen featuring RAUVISIO ferro cabinets. The cabinets have a metallic, brushed finish that gives them a sophisticated, industrial look. The countertop is made of white marble with dark veining, and the space is lit with modern, track lighting.

RAUVISIO ferro™

Inspired by metals, this surface lights a spark of sophistication in any space.

Our breadth of lines allow us to bring your stories to life.



Plunge into reflection with **RAUVISIO brilliant.**

Inspired by water, this surface reflects its surroundings with intense color depth.

Product name: [RAUVISIO brilliant™ high-gloss acrylic surface](#)



What is RAUVISIO brilliant?

- A high-gloss acrylic surface featuring a color-matched PMMA layer instead of a clear top layer, giving it intense color depth with decades of UV stability
- With tones from tranquil to vibrant, this supremely reflective material is offered as boards and edgeband or fabricated panels and cabinet doors
- Double-sided panels and doors are supplied with an MDF core that is CARB2, TSCA Title VI certified and finished with perfectly matched REHAU LaserEdge™
- **The result:** Whites that stay white and colors that remain true, combined with the monolithic aesthetic of a high-end lacquered door

Ride the waves of uninhibited reflection and plunge beneath the surface to colorful depths with **RAUVISIO brilliant**.

RAUVISIO brilliant

Features and benefits

1. Mirror-like reflective quality

2. Decades of UV stability

3. Intense color depth

- Double-sided finished panel or cabinet door
- Chemical and stain resistant
- Up to 60% lower production costs compared to painted components
- Ability to miter fold and cut








RAUVISIO brilliant

High-Gloss Acrylic Surface

Color options

**Color has directionality*

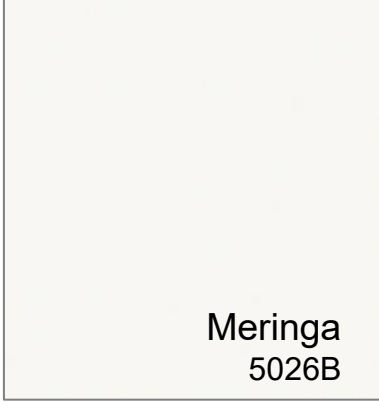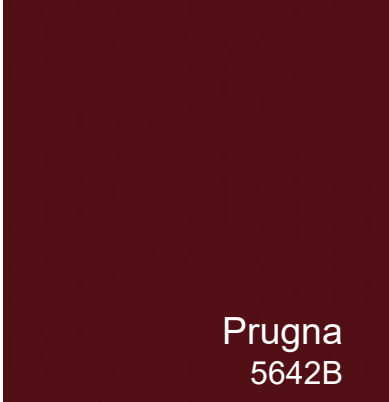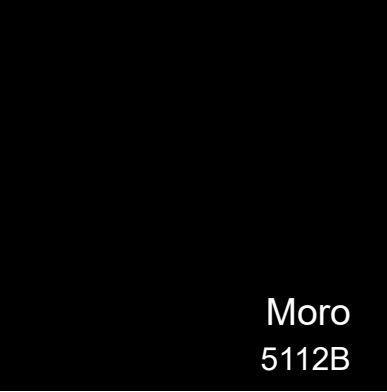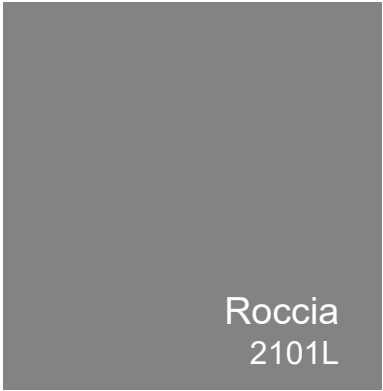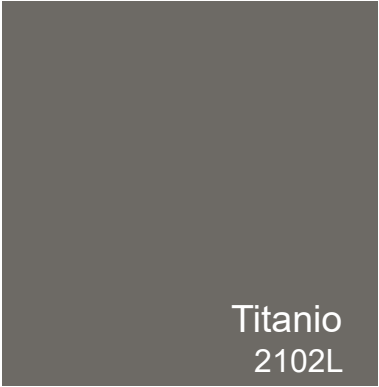

RAUVISIO brilliant

Program options

Laminate

51 in x 110 in x 0.7 mm (1300 x 2800 x 0.7 mm)

Acrylic laminate consisting of color-matched PMMA and ABS layers allows for mirror-like reflective quality and depth of color

Custom cabinet doors and fabrication

Slab and shaker cabinet doors, 5/16 and 3/4 in panels, integrated handles and appliance end panels

See RAUVISIO House Program Guide for exact details

Pressed panels

51 x 110 x 3/4 in (1300 x 2800 x 19.3 mm *19.1 mm*)

Large format pressed panel of super-refined MDF surrounded by two sides of high-gloss acrylic laminate

Floating shelves

10 and 12 in depth

Structural floating shelves capable of replacing the storage capacity of upper cabinets


Edgeband

REHAU LaserEdge and standard ABS edgeband

Various sizes for all your project requirements

RAUVISIO brilliant

Technical data

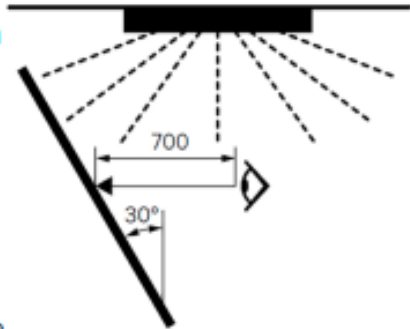Visual properties	Test standard	Requirements	Test results
Surface gloss level	AMK-MB-009, 09/2010	Measurement with 60° measurement geometry	≥ 85 GLE high gloss
Color	AMK-MB-009, 09/2010	No significant change to the limit sample; even covering properties	Fulfilled
Surface	AMK-MB-009, 09/2010 following EN ISO 7823-2*	Uniform surface, surface defects must not affect the overall appearance from a distance of 2 ft (0.7 m). A flawless surface cannot be guaranteed due to the industrial production process, small imperfections and surface irregularities are permissible	 Fulfilled
Light fastness	Based on DIN EN ISO 4892-2, Process B Duration of the test: to DIN EN ISO 105 B01–B06 Assessment of the sample: to DIN EN ISO 105 A02	Assessment according to the blue scale	Level 7
		Assessment according to the grey scale	≥ Level 4

High gloss competitor matrix

Material type and feature definitions

Material Types

Acrylic: An acrylic sheet laminated to an MDF board. Acrylic laminates are extruded laminates (color and clear layer usually 0.7-1.0mm thick) that provide the highest depth and clarity of high gloss surfaces. Acrylic laminates are typically 2-3 times thicker than solid PET laminates, and 10 times thicker than clear PET and lacquered melamines, which give it the superior mirror image qualities for high gloss.

Solid PET: An extruded PET film (color and clear layer usually 0.3mm thick) that is laminated to an MDF board.

Clear PET: A decorative melamine paper sheet that is fused to an MDF board with a clear PET film applied to the melamine paper (total laminate thickness about 0.075mm).

Lacquered melamine: Panels made by fusing a decorative paper sheet to an MDF board and UV curing a lacquer on the paper surface. This material has the thinnest decorative surface and is most susceptible to moisture intrusion.

High gloss competitor matrix

Material type and feature definitions

Features

Double-sided doors: Identical decorative laminate on both sides, giving the component a solid monolithic look

No waviness: The reflective image is flat like a mirror and not wavy

No orange peel: The surface is very smooth and not bumpy like the skin of an orange

UV resistance: Good UV resistance means no color change or yellowing over time

Batch-to-batch color consistency: The color does not shift from production run to production run

Light scratch resistance: The material cannot be scratched by objects such as a steel wool pad

Light scratch repairable: Light scratches can be repaired

Processability: Easy to process with machinery, no issues with chipping or damaging material when cutting or edgebanding

Resists warpage: Panels must be balanced with the top and bottom laminates otherwise this can cause the panel or finished component to warp

Resistance to steam: Finished component can resist steam or heat / humidity intrusion like near a dishwasher or above a boiling pot of water

High gloss competitor matrix

Material type and feature definitions

For INTERNAL use only

Product Name	Material Composition	Seller	LaserEdge available from Manufacturer	Double-Sided Doors	Reflective Image Quality		UV Resistance	Batch-to-Batch Color Consistency	Light Scratch Resistance	Light Scratch Repairable	Processability	Resists Warpage	Resistance to Steam
RAUVISIO brilliant	Acrylic	REHAU and Distributors	●	●	●	●	●	●	●	●	●	●	●
Senosan 1800 (Reflekt)	Acrylic	Premier Eurocase	●		●	●	●	●	●	●	●	●	●
Kronosystems Acryl +	Acrylic	Richelieu (Brilliante)	●		●	●	●	●	●	●	●	●	●
Stylelite (EGR/SSI)	Acrylic	Northern Contours	●		●	●	●	●	●	●	●	●	●
Gizir Vision	Acrylic		●	●	●	●	●	●	●	●	●	●	●
Polylac	Clear PET		●	●	●	●	●	●	●	●	●	●	●
Panel Artz	Solid/Clear PET		●	●	●	●	●	●	●	●	●	●	●
AGT	Clear PET		●	●	●	●	●	●	●	●	●	●	●
Mirlux	Solid PET		●	●	●	●	●	●	●	●	●	●	●
Alvic Luxe	Lacquered melamine	Richelieu (Brilliante), EB Bradley	●	●	●	●	●	●	●	●	●	●	●
Egger	Lacquered melamine	Dixie, CWP	●	●	●	●	●	●	●	●	●	●	●
Merino	Lacquered melamine	CWP	●	●	●	●	●	●	●	●	●	●	●

● = Demonstrates all qualities ● = Demonstrates some qualities ● = Demonstrates no qualities



Mine a gem as rare as you with
RAUVISIO crystal.

Inspired by gemstones, these natural and polished finishes achieve a rarified luster.

Product name: RAUVISIO crystal™ acrylic surface

What is RAUVISIO crystal?

- Stone-hard, nearly 2 mm clear PMMA (acrylic) top layer creates intense reflectivity, optical depth and superb UV- and scratch-resistance
- With polished (glass) and natural (frosted) and finishes, designs from mineral to mirror, board and slim configurations, RAUVISIO crystal is our most versatile line
- Laminate and color-matched balancing backer are applied using PUR glue to an MDF core that is CARB2, TSCA Title VI certified
- Panels and doors are finished with perfectly matched REHAU LaserEdge™, then beveled for a convincing replication of back-painted or frosted cut glass
- 50% lighter and 10 times more break resistant than real glass, yet as easy to work with as engineered wood

RAUVISIO crystal is a gem of a surface you'll mine time-and-again.

RAUVISIO crystal

Features and benefits






1. **10x more break resistant than glass**
 2. **50% lighter than real glass**
 3. **Intense color depth**
 4. **Scratch resistant**
- Truly unique, high-end look when edgeband is beveled
 - Heat, humidity and warp resistant
 - Normal woodworking tool processing
 - No aluminum frame
 - Create message boards: Write with chalk on the natural finish, dry-erase markers on the polished



RAUVISIO crystal

Acrylic Surface

Color options

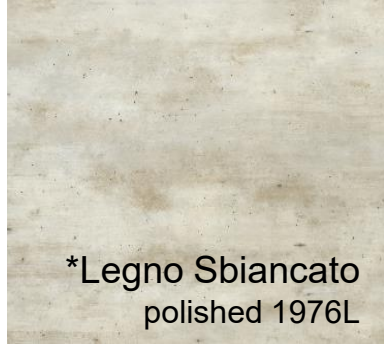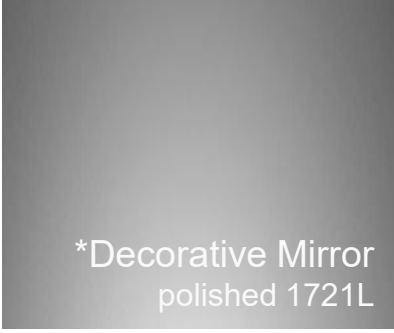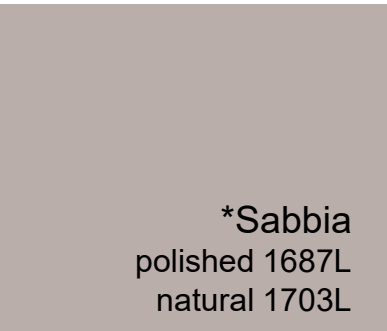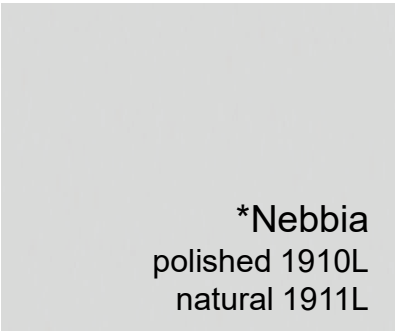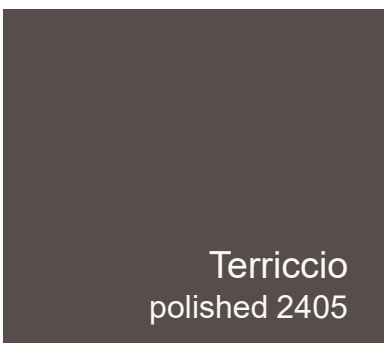

**Available in slim*

RAUVISIO crystal

Program options

Laminate

51 in x 110 in x 2 mm (1300 x 2800 x 2 mm)

Acrylic laminate consisting of clear 1.6 mm PMMA layer providing depth effect and 0.4 mm and colored ABS layer providing color depth

Custom cabinet doors and fabrication

Slab and shaker (frame only) cabinet doors, and 3/4 in panels, integrated handles and appliance end panels

See RAUVISIO House Program Guide for exact details

Pressed panels

51 x 110 x 3/4 in (1300 x 2800 x 19 mm *20.1mm*)

Pressed panel of RAUVISIO crystal acrylic laminate, super-refined MDF board and a color-matched balancing backer

Wall panels – RAUVISIO crystal slim

51 x 110 x 5/32 in (1300 x 2800 x 4 mm)

4.0 mm thin panel consisting of RAUVISIO crystal polymer glass laminate directly pressed to a color-matched balancing backer

Pressed panels – RAUVISIO crystal mirror

48 x 96 x 3/4 in (1220 x 2400 x 19 mm *20.1mm*)

Large format pressed panel of super-refined MDF surrounded by two sides of high-gloss acrylic laminate

Edgeband

REHAU LaserEdge and standard ABS edgeband

Various sizes for all your project requirements - ideally processed with a beveling tool

RAUVISIO crystal

Technical data

Visual characteristics	Test standard	Requirements	Test result
Surface gloss level	AMK-MB-009, 09/2010	Measurement with 60° geometry	High-gloss: ≥ 85 GLE Matt: ≤ 6 GLE
Colour/decor	AMK-MB-009, 09/2010	no significant change to the master sample; Uniform coverage, properties/decor pattern	Fulfilled
Light fastness	Based on DIN EN ISO 4892-2, Meth. B (behind window glass)	Assessment according to the blue scale	$\geq$ level 7
	Assessment according to DIN EN ISO 105 A02	Assessment according to the grey scale	$\geq$ level 4
Surface	AMK-MB-009, 09/2010 based on EN ISO 7823-2 ¹⁾	Uniform surface, surface defects must not affect the overall appearance from a distance of 0.7 m. A flawless surface cannot be reproduced due to the industrial production process; small blemishes and surface irregularities are permissible.	Fulfilled

Note for mirror →

RAUVISIO crystal

Technical data

Surface properties - mechanical / physical	Test standard	Requirements	Test result
Chemical resistance ¹⁾	DIN 68861 / T1	High gloss: 1A Matt: 1B	See table 'Substances' Page 50
Scratch resistance	DIN 68861 / T4	High gloss: 4C Matt: 4B	Fulfilled
Micro-scratch resistance	DIN CEN TS 16611 (Proc. A/B)	Procedure A: High-gloss/matt: max. 5% Procedure B: High-gloss/matt: Class 5 mirror: Class 4	Fulfilled
Performance in dry heat	68861/T7/DIN EN 12722 DIN CEN TS 16209	7D Class C	70 °C 100 °C
Performance in moist heat	DIN 68861 / T8 / DIN EN 12721	8B	70 °C
Cross-hatch test	DIN EN ISO 2409	GT 0-1	Fulfilled
Performance in water vapour	DIN 438-2	Level 5 No changes	Fulfilled
Flexural modulus of elasticity ²⁾	DIN EN ISO 178		3080 N/mm ²
Flexural strength ²⁾	DIN EN ISO 178		98 N/mm ²
Impact strength ²⁾	DIN EN ISO 179-1		11 kJ/m ²
Linear thermal expansion coefficient per Kelvin temperature change ²⁾	DIN 11359-2 Crystal slim only	-40 °C ... +20 °C +10 °C ... +40 °C +20 °C ... +80 °C	0.590 E ⁻⁴ 0.667 E ⁻⁴ 0.754 E ⁻⁴

RAUVISIO crystal

Technical data

Substances	RAUVISIO crystal high-gloss		RAUVISIO crystal matt	
	D	Result	T	Result
Acetic acid	16 h	5	16 h	5
Citric acid	16 h	5	16 h	5
Ammonia water	16 h	5	16 h	5
Ethyl alcohol	16 h	5	16 h	5
Red wine	16 h	5	16 h	5
Beer	16 h	5	16 h	5
Cola	16 h	5	16 h	5
Coffee	16 h	5	16 h	5
Black tea	16 h	5	16 h	5
Blackcurrant juice	16 h	5	16 h	5
Evaporated milk	16 h	5	16 h	5
Water	16 h	5	16 h	5
Petrol	16 h	5	16 h	5
Acetone	16 h	5	10 s	5
Ethyl-butylacetate	16 h	5	10 s	5
Butter	16 h	5	16 h	5
Olive oil	16 h	5	16 h	5
Mustard	16 h	5	16 h	5
Onion	16 h	5	16 h	5
Disinfectants	16 h	5	16 h	5
Cleaning agent	16 h	5	16 h	5
Cleaning solution	16 h	5	16 h	5

High gloss competitor matrix

Material type and feature definitions

Product Name	Material Composition	Seller	Break Resistance	Scratch Resistance	Processability	Onsite Fabrication	No Frame Required
RAUVISIO crystal	Acrylic	REHAU and Distributors	●	●	●	●	●
Backpainted glass	Tempered glass	Distributors	●	●	●	●	●

● = Demonstrates all qualities ● = Demonstrates some qualities ● = Demonstrates no qualities



Lay a refined foundation with
RAUVISIO noir.

Inspired by film noir, this self-healing surface lays a base for timeless elegance.

Product name: [RAUVISIO noir™ monotonic matte surface](#)

What is RAUVISIO noir?

With intensely rich hues and real-world grit, **RAUVISIO noir's** understated surface lays a refined foundation for even the most exuberant design.

- Forged in Italy with the finest materials, this monotonic matte surface is electron beam cured to retain all of its elemental properties while delivering unwavering resilience and elegance
- Deeply light-absorbent surface independently heals micro-scratches
- Ultra-low in VOCs and phenol free, it minimizes chemicals indoors, while its antimicrobial and hydro-repellent properties make it suitable for food contact
- Double-sided panels and doors are crafted with REHAU LaserEdge™ for a monolithic effect that rivals a solid surface

RAUVISIO noir

Features and benefits

1. **Soft touch finish with seamless matte from every angle (double-sided)**
 2. **Independent thermal healing**
 3. **Fingerprint, impact and scratch resistant**
- Deeply light-absorbent
 - Chemical and stain resistant
 - Wet and dry heat resistant
 - Ultra-low in VOCs and phenol free
 - Bacteria, mold and stain resistant
 - Anti-microbial
 - Suitable for contact with food
 - Double-sided finished cabinet door or panel



RAUVISIO noir

Monotonic Matte Surface

Color options

Platinum Sands 155001	High Low 154707	Capital Starlit 154706	Boxcar Blonde 154714	Trench Coat 154711	<i>*Available in compact</i>
Sierra Social 155000	Gimlet Haze 155064	Maltese Mist 154704	Silver Lake 154709	<i>*Smoke Stack</i> 154710	Gaslit Alley 154712
Taupe Farewell 155063	Decoy Dusk 155065	<i>*Casa Blanca</i> 154705	Midnight Dash 154713	Olive Detour 154715	<i>*After Dark</i> 154708

RAUVISIO noir

Program options

Laminate

51 in x 120 in x 0.9 mm (1300 x 3050 x 0.9 mm)

Monotonic matte surface in a large format for all types of millwork applications

Custom cabinet doors and fabrication

Slab, shaker, siena cabinet doors, 5/16 and 3/4 in panels, integrated handles and appliance end panels

See RAUVISIO House Program Guide for exact details

Pressed panels

51 x 120 x 3/4 in (1300 x 3050 x 19.5 mm)

51 x 120 x 5/16 in (1300 x 3050 x 8.5 mm)

Large format pressed panel of particle board surrounded by two sides of laminate

Floating shelves

10 and 12 in depth

Structural floating shelves capable of replacing the storage capacity of upper cabinets

Compact

51 x 120 x 15/32 in (1300 x 3050 x 12 mm)

Solid core monotonic matte compact panel for horizontal and vertical applications

Edgeband

REHAU LaserEdge and standard ABS edgeband

Various sizes for all your project requirements

RAUVISIO noir

Technical data

PROPERTIES	TEST METHOD	PROPERTY OR ATTRIBUTE	UNIT	RAUVISIO noir
Surface Quality	EN 438-2.4	Spots, dirt and similar surface defects	mm ² /m ²	≤ 1
		Fibers, hair and scratches	mm/m ²	≤ 10
Dimensional Tolerances	EN 438-2.5	Thickness tolerance	mm	0.9 ± 0.10
	EN 438-2.6	Length and width	mm	+ 10 / 0
	EN 438-2.7	Straightness of edge	mm/m	≤ 1.5
	EN 438-2.8	Squareness	mm/m	≤ 1.5
	EN 438-2.9	Flatness	mm/m	≤ 60
Resistance to surface wear	EN 438-2.10	Initial Point	Revolutions	≥ 200
Resistance to immersion in boiling water	EN 438-2.12	Appearance	Rating	≥ 4
Resistance to water vapor	EN 438-2.14	Appearance	Rating	≥ 4
Resistance to dry heat (180C)	EN 438-2.16	Appearance	Rating	≥ 4
Resistance to wet heat (100C)	EN 12721:1997	Appearance	Rating	≥ 4
Dimensional stability at high temperatures	EN 438-2.17	Cumulative dimensional change	Longitudinal %	≤ 0.55
		Cumulative dimensional change	Transversal %	≤ 1.05
Resistance to impact with small diameter ball	EN 438-2.20	Spring force	N	≥ 21
Resistance to impact with large diameter ball	EN 438-2.21	Drop height	mm	≥ 1000
		Indentation diameter	mm	≤ 10
Resistance to cracking	EN 438-2.23	Appearance	Rating	≥ 4
Resistance to scratching	EN 438-2.25	Appearance	Rating	≥ 4
Resistance to staining	EN 438-2.26	Appearance - Group 1 and 2	Rating	5
		Appearance - Group 3	Rating	≥ 4
Light fastness (xenon-arc)	EN 438-2.27	Contrast	Grey scale rating	≥ 4
Gloss Level	ISO 2813	Surface specular reflectance	Gloss unit	5-15 (measured at 85°)
Electrostatic property	EN 61340-4-1	Surface electrical resistance	ohms	between 1.0E10 and 1.0E12
Density	EN ISO 1183	Density	g/cm ³	≥ 1.35
Resistance to micro scratches	EN 438-2.30	Visual assessment	Method B	5

RAUVISIO noir

Technical data

PROPERTIES	TEST METHOD	PROPERTY OR ATTRIBUTE	UNIT	RAUVISIO noir
Acids resistance	SEFA 8-PL-2010 method 8.1	Chemical Spot Test	pass/not pass	pass
Formaldehyde Emissions	EN 13986	Formaldehyde emission rating	rating	E1
Hygiene (Suitability for Food Service)	NSF	NSF/ANSI 35	pass/not pass	pass
VOC emissions	AFNOR NF EN ISO 16000-9	Formaldehyde	mg/m3	≤ 0.002
		Total VOCs	mg/m3	≤ 0.1
Contact with food - overall migration	EN 1186-3	3% acetic acid 24h @ 40C	mg/dm2	< 1
	EN 1186-3	50% ethanol 24h @ 40C		< 1
	EN 1186-14	95% ethanol 24h @ 40C		< 1
	EN 1186-14	isooctane 24h @ 40C		< 1
Contact with food - formaldehyde specific migration	EN 13130-23	3% acetic acid 24h @ 40C	mg/kg	< 15
Evaluation of micro-organisms action	JIS Z 2801:2010	Antimicrobial activity after 24h at 35C	bacterial viability: log reduction reduction%	>3.6 >99.975
Phenol Free	EN ISO 16000-9	Phenol content in resin	Yes/No	Yes

Matte gloss competitor matrix

Material type and feature definitions

Material Types

Electron Beam (EB) Cured HPL: The state-of-the-art highest quality surface. It combines the durability, longevity and heat resistance of HPL with the electron beam cure, providing superior performance in super matte, soft touch, chemical resistance, scratch resistance, self healing and antibacterial properties.

UV Cured PET: An extruded PET film (color and clear layer) with an ultraviolet (UV) cure that has some of the benefits of the EB curing method.

Lacquered melamine: Panels made by fusing a decorative paper sheet to an MDF board and UV curing a lacquer on the paper surface. UV cured melamine has some of the benefits of the EB curing method. However, this product has the thinnest decorative surface and is most susceptible to moisture intrusion.

Acrylics: An acrylic sheet laminated to an MDF board. Acrylic laminates are extruded laminates (color and clear layer).

Matte competitor matrix

Material type and feature definitions

Features

Electron beam vs. ultraviolet curing: UV curing needs additives (absorbers/activators) in lacquer to respond to UV cure. EB curing used for HPL for food contact. Absorbers can make it difficult to achieve food contact certification because they must be completely removed.

Double-sided doors: Identical decorative laminate on both sides, giving the component a solid monolithic look

Super matte: Very low gloss level (<10 GLU) when measured at very flat angles (85 degrees or more)

Velvety soft touch: The surface finish has a velvety feel to the touch, not rough or plastic-like

Anti-fingerprint: Fingerprints are not left behind on the surface

Extreme heat resistance: The surface can withstand 180° C, hot pots, boiling water and is suitable for countertop surface

Light scratch resistance: The material cannot be scratched by objects such as a steel wool pad

Light scratch repairable: Light scratches can be repaired by a melamine foam sponge, or will self heal on its own over time

Anti-bacterial: Passes JIS Z 2801 testing. The JIS Z 2801 tests the ability of hard surfaces to inhibit the growth of microorganisms or kill them over a 24-hour period of contact. The test is done with staphylococcus and e-coli specimens.

Suitable for countertop: Can be used not only as a horizontal surface, but as a kitchen countertop by exhibiting extremely high durability and heat resistance

Resistance to steam: Finished component can resist steam or heat and humidity intrusion like near a dishwasher or above a boiling pot of water

Matte gloss competitor matrix

Material type and feature definitions

Product Name	Material Composition	Seller	LaserEdge available from Manufacturer	Double-Sided Doors	Super Matte	Velvety Soft Touch	Anti-Fingerprint	Extreme Heat Resistance	Light Scratch Resistance	Light Scratch Repairable	Anti-Bacterial	Suitable for Countertops	Resistance to Steam
RAUVISIO noir	EB cured HPL	REHAU and Distributors	●	●	●	●	●	●	●	●	●	●	●
FENIX NTM	EB cured HPL	REHAU and Distributors	●		●	●	●	●	●	●	●	●	●
Wilsonart Traceless	UV cured HPL	Wilsonart Distributors	●		●	●	●	●	●	●	●	●	●
Abet Laminati Polaris	UV cured HPL		●		●	●	●	●	●	●	●	●	●
RAUVISIO shade	UV cured PET	REHAU and Distributors	●	●	●	●	●	●	●	●	●	●	●
Mirlux	UV cured PET		●	●	●	●	●	●	●	●	●	●	●
Dolce	UV cured PET	Richelieu	●	●	●	●	●	●	●	●	●	●	●
Alvic Matte	UV cured lacquered melamine	EB Bradley, Richelieu	●	●	●	●	●	●	●	●	●	●	●
Egger Perfect Sense	UV cured lacquered melamine		●	●	●	●	●	●	●	●	●	●	●
Merino	UV cured lacquered melamine		●	●	●	●	●	●	●	●	●	●	●
Senosan AM1800 Top Matte	Matte acrylic on MDF	Premier Eurocase	●	●	●	●	●	●	●	●	●	●	●

● = Demonstrates all qualities

● = Demonstrates some qualities

● = Demonstrates no qualities



Modernize horizontal and vertical surfaces with **RAUVISIO noir™ compact** for a stunning monotonic matte look.



- 12 mm thick solid core panel that is made of synthetic thermosetting resins
- Balanced panel with identical monotonic matte surfaces on both sides with a color-matched core
- Horizontal applications: worktop, countertop or other surfaces
- Vertical applications: wall cladding, partitions, doors or other vertical surfaces

RAUVISIO noir compact

Overview

- Same properties as RAUVISIO noir
- Double sided with color matched core material – 12mm thickness
- Compact size: 1300 x 3050 x 12mm
- Waterproof – can be used with undermount sinks
- Does not seam like solid surface
- Thermal expansion must be taken into account when installing

Color options

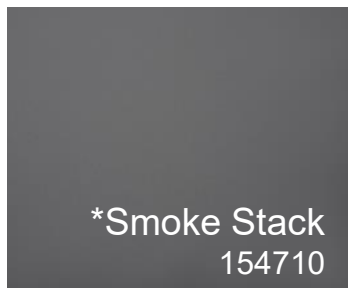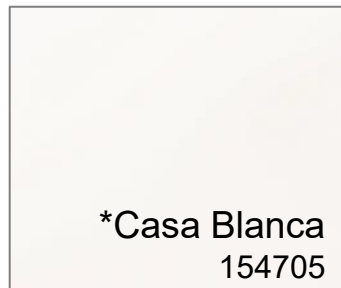



Blend resilience and softness
with **RAUVISIO shade**.

Inspired by the drawn line, this solid-extruded
surface offers unbound soft resilience.

Product name: RAUVISIO shade™ super-matte PET surface



What is RAUVISIO shade?

- Made with 80% recycled PET
- Solid-extruded super-matte PET surface offering superior durability with a thickness 4 to 5 times that of clear PET film or lacquered melamine
- Its UV-cured excimer lacquer provides low-light reflectivity, impact and fingerprint resistance and a soft super-matte finish

RAUVISIO shade brings unbound soft resilience to your project.

RAUVISIO shade

Super-Matte PET Surface

- 1. PET laminate is up to 80% recycled material**
 - 2. Value-engineered option for large commercial projects**
 - 3. Double-sided boards offer a soft super-matte finish from every angle**
- Solid-extruded, super-matte PET surface
 - Fingerprint, impact and scratch resistant
 - Low light reflectivity
 - Superior UV stability
 - Excimer lacquering for increased durability
 - CARB2, TSCA Title VI certified



RAUVISIO shade

Super-matte PET surface

Enhanced lines and colors.

Chalk
2001

Canvas
3103

Clay
3300

Indigo
6150

Pewter
3001

Charcoal
5000

Entire line is
new and
enhanced.

RAUVISIO shade

Program options

Pressed panels

48 x 110 x 3/4 in (1200 x 2800 x 19.3 mm *3073 x 19.8 mm*)

PET film is applied over a melamine board

Custom cabinet doors and fabrication

Slab and shaker cabinet doors, 1/4 and 3/4 in panels

See RAUVISIO House Program Guide for exact details

Edgeband

REHAU LaserEdge and standard ABS edgeband

Various sizes for all your project requirements

**All technical data sheets
can be found on each
RAUVISIO House line page
of our website.**



Touch the forest guilt free with **RAUVISIO terra.**

Inspired by the forest, this engineered wood delivers all-round durability.

Product name: [RAUVISIO terra™ soft, textured HPL surface](#)

What is RAUVISIO terra?

- Soft, textured HPL surface brings the wonder of the outdoors in with double-sided, seamless boards that stand the test of time
- An engineered surface providing superior impact- and chip-resistance compared to TFL and melamine, and even more durable than real wood

From daybreak to twilight, immerse yourself in the changing colors of the forest with **RAUVISIO terra**.

RAUVISIO terra

Soft, Textured HPL Surface










1. **Soft touch finish with a deeply textured wood look and feel**
 2. **Fingerprint and impact resistant**
 3. **Heat, humidity and warp resistant**
- Chip resistant
 - Consistent grain flow and matching available
 - No painting or staining required, unlike wood
 - Double-sided finished cabinet door or panel



RAUVISIO terra

Soft, Textured HPL Surface

Color options

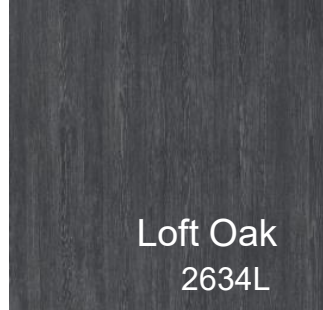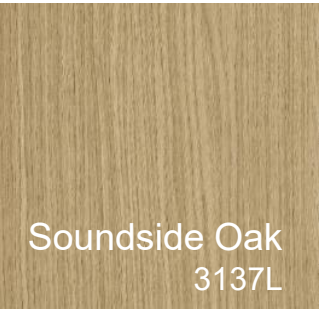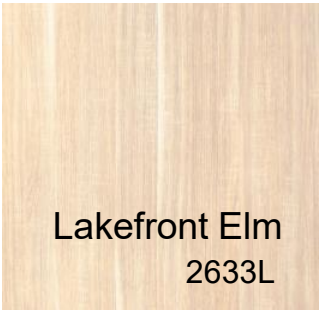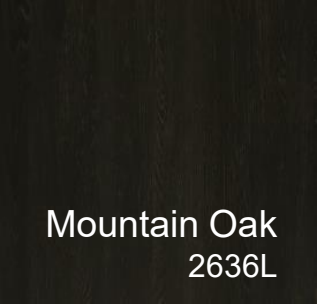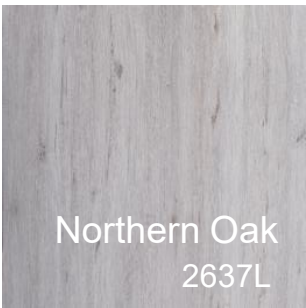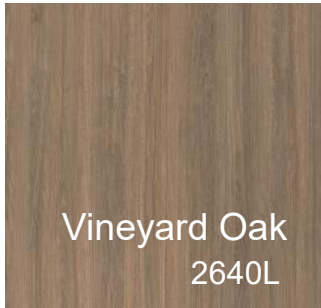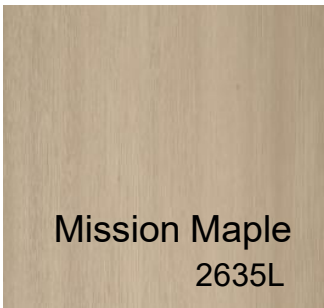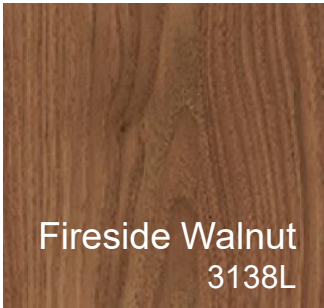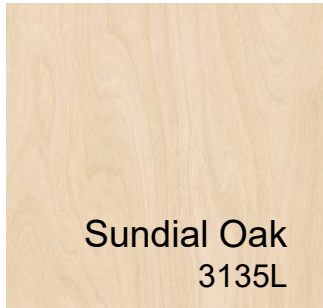

RAUVISIO terra

Program options

Laminate

51 in x 120 in x 0.9 mm (1300 x 3050 x 0.9 mm)

Soft-touch, deeply textured, vertical-grade High Pressure Laminate (HPL)

Pressed panels

51 x 120 x 3/4 in (1300 x 3050 x 19.5 mm)

51 x 120 x 5/16 in (1300 x 3050 x 8.5 mm)

Large format pressed panel of particle board surrounded by two sides of laminate

Edgeband

REHAU LaserEdge and standard ABS edgeband

Various sizes for all your project requirements

Custom cabinet doors and fabrication

Slab, shaker, siena cabinet doors, 5/16 and 3/4 in panels, integrated handles and appliance end panels

See RAUVISIO House Program Guide for exact details

Floating shelves

10 and 12 in depth

Structural floating shelves capable of replacing the storage capacity of upper cabinets

RAUVISIO terra

Technical data

Horizontal-grade is greater than or equal to 150

Resistance to surface wear	EN 438-2.10	Initial point	Revolutions	≥ 90
Resistance to immersion in boiling water	EN 438-2.12	Appearance	Ratings	≥ 4
Resistance to water vapor	EN 438-2.14	Appearance	Ratings	≥ 4
Resistance to dry heat (180°C)	EN 438-2.16	Appearance	Ratings	≥ 4
Resistance to wet heat (100°C)	EN 12721:1997	Appearance	Ratings	≥ 4
Dimensional stability at high temperatures	EN 438-2.17	Cumulative dimensional change	Longitudinal %	≤ 0.55
		Cumulative dimensional change	Transversal %	≤ 1.05

RAUVISIO terra

Technical data

Horizontal-grade is greater than or equal to 20 N

Resistance to impact with small diameter ball	EN 438-2.20	Spring force	N	≥ 20
Resistance to impact with large diameter ball	EN 438-2.21	Drop height	mm	≥ 800
		Indentation diameter	mm	≤ 10
Resistance to cracking	EN 438-2.23	Appearance	Rating	≥ 4
Resistance to scratching	EN 438-2.25	Appearance	Rating	≥ 3

Horizontal-grade is greater than or equal to 3

RAUVISIO terra

Technical data

Hygiene (suitability for food service)	NSF	NSF/ANSI 35	mg/m ³	pass
Formaldehyde emissions	EN 13986	Formaldehyde emission rating	Rating	E1
		Classification	mg/m ³	A+
Phenol free	EN ISO 16000-9	Phenol content in resin		Phenol free
Top laminate raw density	DIN EN 323	-	g/cm ³	1.35
Fire behavior	DIN 4102/1			Standard: Class B Fire resistant: Class A

Texture gloss competitor matrix

Material type and feature definitions

Material Types

HPL: Made from several layers of kraft paper and [typically] phenolic resins fused under high pressure to form a very durable laminate (typically 1.0mm thick). HPLs are very tough and have extreme heat resistance allowing them to be used in horizontal surfaces.

Textured melamine: Panels made of a very thin decorative surface (typically 0.075mm thick) that are susceptible to moisture intrusion and are much less durable than HPL laminated panels.

Wood fiber laminate: A continuous low pressure laminate made from wood fibers and environmentally friendly materials (typically 0.2mm thick) that has a more natural wood appearance than textured melamine.

Real wood: Solid and durable, but prone to warpage. Decorative stains will fade and discolor, becoming extremely difficult to match.

Texture gloss competitor matrix

Material type and feature definitions

Product Name	Material Composition	Seller	Soft Touch	Looks like Real Wood	Realistic Embossing	Impact Resistant	Heat & Humidity Resistance	Chip Resistance	Color Consistency	Longevity	Warp Resistance
RAUVISIO terra	Deep textured HPL	REHAU and Distributors	●	●	●	●	●	●	●	●	●
Wilsonart/Formica	Textured HPL	Distributors	●	●	●	●	●	●	●	●	●
RAUVISIO ingrain	Wood fiber laminate	REHAU and Distributors	●	●	●	●	●	●	●	●	●
Real wood	Real wood	Distributors	●	●	●	●	●	●	●	●	●
Cleaf/Salt	Deep textured melamine on PB	Distributors	●	●	●	●	●	●	●	●	●
Stevens	Deep textured melamine on PB	Distributors	●	●	●	●	●	●	●	●	●
Arauco	Deep textured melamine on PB	Distributors	●	●	●	●	●	●	●	●	●
Uniboard	Deep textured melamine on PB	Distributors	●	●	●	●	●	●	●	●	●
Tafisa	Deep textured melamine on PB	Distributors	●	●	●	●	●	●	●	●	●

● = Demonstrates all qualities
 ● = Demonstrates some qualities
 ● = Demonstrates no qualities
 ○ = N/A

Entice the senses with **RAUVISIO**
ingrain.

Inspired by pattern, this veneer aesthetic is a celebration for the eye.

Product name: [RAUVISIO ingrain™ wood fiber laminate](#)



What is RAUVISIO ingrain?

Lose yourself in the definition of **RAUVISIO ingrain**.

- A wood fiber laminate made from cellulose fibers derived from wood pulp bonded using vegetable-based adhesives, resulting in a high-performing, sustainable surface
- Free of melamine resins, formaldehyde, phenol and solvents
- Offered as a flexible pressure sensitive adhesive (PSA) laminate making it ideal for vertical design elements, including curved walls and soft 3D applications, and suitable for cabinet refacing
- Crafted in Italy, the wood-fiber paper is applied stateside to a particle board core using PUR glue and finished with REHAU LaserEdge™ duo-gloss technology
- By combining color, gloss and embossing patterns, this next-generation edge seamlessly continues the heightened sensory experience of the wood-fiber surface

RAUVISIO ingrain

Wood Fiber Laminate Surface

- 1. Synchronized etching finish for a more natural veneer aesthetic**
 - 2. Made with natural wood fibers**
 - 3. Free of melamine resins, formaldehyde, phenol and solvents**
- High-definition print combined with grain-matched patterned gloss
 - 3x thicker than melamine
 - PSA laminate is extremely flexible, making it ideal for vertical design elements, including curved walls and soft 3D applications, and suitable for cabinet refacing
 - Finished with REHAU LaserEdge duo-gloss technology which applies gloss on with a pattern
 - Double-sided finished cabinet door or panel




RAUVISIO ingrain

Wood Fiber Laminate Surface


Color options



Seaside Pine
1823

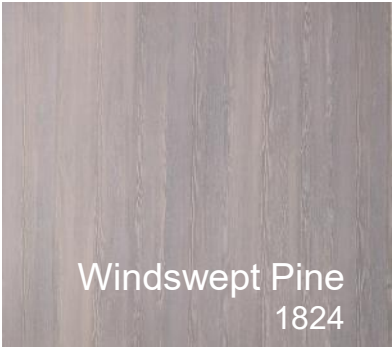


Windswept Pine
1824

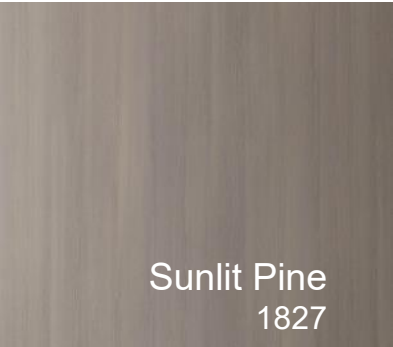


Sunlit Pine
1827



Heirloom Oak
1318

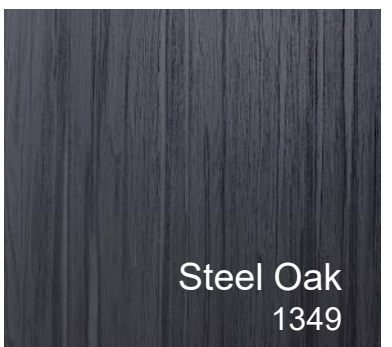


Steel Oak
1349

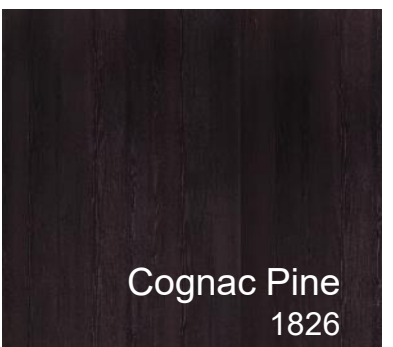

Cognac Pine
1826



Honeycomb Oak
1348

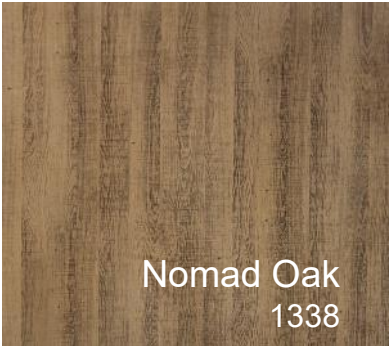

Nomad Oak
1338




Milestone Maple
1502




Acacia Oak
1343



Bourbon Teak
1831

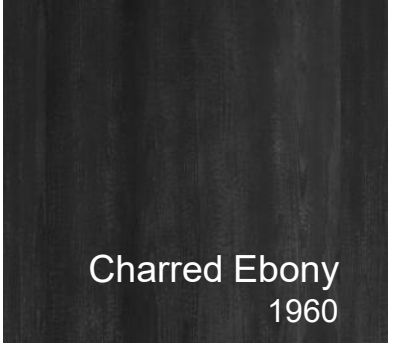


Charred Ebony
1960

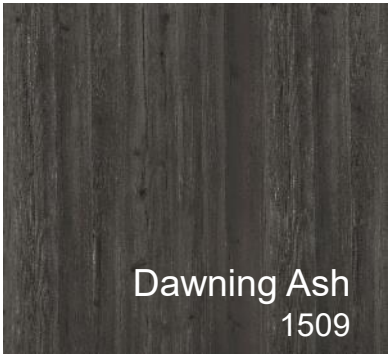

Dawning Ash
1509



Whispering Walnut
1345

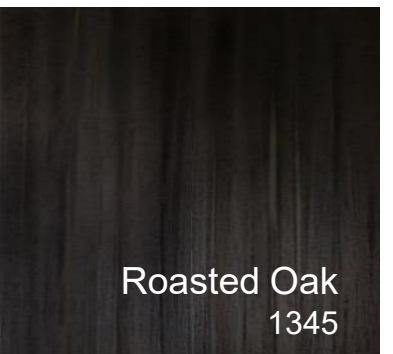

Roasted Oak
1345

RAUVISIO ingrain

Program options

Laminate

49 x 121 in x 0.5 mm (1260 x 3070 x 0.5 mm)

Wood fiber laminate surface in a large format for vertical millwork applications

Custom cabinet doors and fabrication

Slab and shaker cabinet doors, 1/4 and 3/4 in panels, integrated handles and appliance end panels

See RAUVISIO House Program Guide for exact details

Pressed panels

49 x 121 in x 19.5 mm (1245 x 3073 x 19.5 mm)

49 x 121 x 1/4 in (1245 x 3073 x 6.8 mm)

Large format pressed panel of particle board surrounded by two sides of laminate

Edgeband

REHAU LaserEdge and standard ABS edgeband with duo-gloss technology

Two gloss levels applied in a pattern – with precision embossing

Environmental properties of surface material

Properties	Test method	Property or attribute	Unit	Results
VOC emissions	EN ISO 16000-9	Classification	Rating	A+
		Formaldehyde	mg/m ³	≤ 0.012
		Acetaldehyde	mg/m ³	≤ 0.019
		Toluene	mg/m ³	≤ 0.002
		Tetrachloroethylene	mg/m ³	≤ 0.002
		Xylene	mg/m ³	≤ 0.002
		Trimethylbenzene	mg/m ³	≤ 0.002
		TVOC	mg/m ³	≤ 0.1
Persistent organic pollutions (POPs)	Persistent orgainc pollutions (POPs) EU 2019/1021 Regulation	Contains substances from POPs and EU 2019/1021	Yes/No	No
Safe Drinking Water and Toxic Enforcement Act of 1986	Proposition 65	Contains substances from Prop 65	Yes/No	No
REACH	1907/2006 Art 59	Contains substances on candidate list	Yes/No	No

RAUVISIO ingrain

Technical data

Resistance to scratching	EN 15186:2012	Method B: Load required to scratch	N	0.7
Tendency to retain dirt	9300:2015	Appearance	Rating	3
Light fastness (xenon arc)	EN 15187:200	Contrast	Gray scale rating	> 4
Resistance to dry heat (180°C)	EN 12722:2013	Classification	Rating	A
		Appearance	Rating	≥ 4
Resistance to wet heat (100°C)	EN 12721:1997	Classification	Rating	A
		Appearance	Rating	5
Surface resistance to cold liquids	EN 12720:2013	Classification	Rating	A
		Acetic acid (10%) at 16h	Rating	5
		Ammonia (10%) at 16h	Rating	5
		Citric acid (10%) at 16h	Rating	5
		Cleaning agent at 16h	Rating	5
		Coffee at 16h	Rating	5
		Ethanol (48%) at 6h	Rating	5
		Paraffin oil at 24h	Rating	5
		Water at 24h	Rating	5
		Perspiration basic at 1h	Rating	5
Chemical resistance	ANSI/KCMA A161.1-2012 Section 9.4	Withstands staining from vinegar, lemon, orange & grape juices, ketchup, coffee, olive oil, 100 proof alcohol, detergent solution, mustard	Pass/Fail	Pass

RAUVISIO ingrain

Processing tips

- Similar scratch resistance and performance of pre-finished veneer
- Cut edge can have some fraying of the wood fibers
- Colored markers can hide light fraying (we have recommendations)
- If edgebander pre-mill causes fraying, turn station off and use panel saw for final cut
 - Diamond tool pre-mill gives best results
- Spoil [waste] boards strongly recommended when cutting
- Use care when applying and removing masking tape (for miter cutting)



Cast in refinement with
RAUVISIO ferro.

Inspired by metals, these cool-to-warm tones
light a spark of sophistication in any space.

Product name: RAUVISIO ferro™ metallic PET surface

What is RAUVISIO ferro?

From cool to warm, endless design possibilities await when you accent with **RAUVISIO ferro**.

- Highly touchable and elegant PET surface comprising of inseparable layers of metallic color, secured between transparent layers, finished with a lacquered metallic print
- More resilient than metal foil laminates, which can easily pierce or dent, the solid PET composition is suitable for high-moisture environments and exceptionally resistant to fingerprints, scratches, stains and mold

RAUVISIO ferro

Metallic PET Surface

1. **Soft touch finish**
2. **Fingerprint, impact and scratch resistant**
3. **Double-sided finished cabinet door or panel**

- Mold and stain resistant
- More resilient than metal foil laminates
- Solid PET with no delamination
- Easier on equipment than real metal
- Made of inseparable layers of metallic color, secured between transparent layers, finished with a lacquered metallic print



RAUVISIO ferro

Metallic PET Surface

Color options



RAUVISIO ferro

Program options

Pressed panels

51 x 110 x 3/4 in (1300 x 2800 x 18.6 mm)

Large format pressed panel of super-refined MDF surrounded by two sides of laminate

Custom cabinet doors and fabrication

Slab cabinet doors, 3/4 in panels, integrated handles

See RAUVISIO House Program Guide for exact details

Edgeband

3D PMMA REHAU LaserEdge and standard 3D PMMA edgeband

3D edgeband with clear layer top and patterned metallic color back to match metallic effect of surface

RAUVISIO ferro

Technical data

Surface properties	Test standard	Test result	
Chemical resistance*	DIN 68861 / T1 1A/1B	See "Substances" table page 13	
Scratch resistance	DIN 68861/T4	Class 4F	
Micro-scratch resistance	DIN CEN TS 16611 process A	Change in gloss level 8% (Measurement with 60° measurement geometry)	
	DIN CEN TS 1611 process B	Class 3	
Lightfastness	Based on DIN EN ISO 4892-2, process B Duration of the test: to DIN EN ISO 105 B01-B06	Assessment according to the blue scale	grade 6
	Assessment of the sample: to DIN EN ISO 105 02	Assessment according to the grey scale	≥ level 4

RAUVISIO ferro

Technical data

Assessment according to DIN EN 12720 (07/2009)

Chemical durability	Result
5	No visible change
4	Just noticeable change in gloss or color
3	Slight change in gloss or color; the structure of the test surface is not changed
2	Heavy marks visible; the structure of the test surface is however largely undamaged
1	Heavy marks visible; the structure of the test surface is changed
0	Test surface severely changed or destroyed

Substances	Stress group 1A/1B RAUVISIO ferro	
	T	A
Acetic acid	16 h	5
Citric acid	16 h	5
Ammonia water	16 h	5
Ethyl alcohol	16 h	5
Red wine	16 h	5
Beer	16 h	5
Cola	16 h	5
Coffee	16 h	5
Black tea	16 h	5
Black currant juice	16 h	5
Evaporated milk	16 h	5
Water	16 h	5
Petrol	16 h	5
Acetone	10 s	5
Ethyl-butylacetate	10 s	5
Butter	16 h	5
Olive oil	16 h	5
Mustard	16 h	4
Onion	16 h	5
Disinfectants	10 m	5
Cleaning agent	16 h	5
Cleaning solution	16 h	5

Cleaning

Surface	General cleaning	Strong solvents	Other acceptable cleansers
RAUVISIO brilliant™	Only use microfiber cloths, no harsh chemicals or abrasives. Clean with a mild soap if needed. Do not dry-wipe the acrylic finish. Do not use paper towels, brushes or scouring pads.	Do not use	None
RAUVISIO noir™	Most cleansers, disinfectants and solvents are okay for use. Clean with a damp microfiber cloth and mild soap if needed. Harsh chemicals should be avoided. Do not use brushes or scouring pads.	Okay for use	Simple Green, ethanol, isopropyl alcohol
RAUVISIO shade™	No harsh chemicals, abrasives or high acid content cleansers. Clean with a damp microfiber cloth and mild soap if needed. While the surface is scratch resistant, it should never be dry-wiped. Do not use paper towels, brushes or scouring pads.	Do not use	Window cleaner diluted with water
RAUVISIO crystal™	Only use microfiber cloths, no harsh chemicals, strong solvents or corrosive abrasive cleanser. Clean with a mild soap if needed. Do not use paper towels, brushes or scouring pads.	Do not use	Simple Green, ethanol, isopropyl alcohol
RAUVISIO terra™	Most cleansers, disinfectants and solvents are okay for use. Clean with a damp microfiber cloth and mild soap if needed. While the surface is scratch resistant, it should never be dry-wiped. Harsh chemicals should be avoided. Do not use brushes or scouring pads.	Okay for use	None
RAUVISIO ingrain™	No harsh chemicals, abrasives or high acid content cleansers. Clean with a cotton dish towel and mild soap if needed. Do not use brushes or scouring pads.	Do not use	None
RAUVISIO ferro™	No harsh chemicals, abrasives or high acid content cleansers. Clean with a damp microfiber cloth and mild soap if needed. Do not use paper towels, brushes or scouring pads.	Do not use	Window cleaner diluted with water

Dish soap diluted with water is acceptable to use on any RAUVISIO product.

Fire rating

RAUVISIO House line	Fire behavior Test standard: DIN 4120/1 Requirements: N/A	Flame spread index Test standard: ASTM E84 Requirements: Class C: 76-250	Smoke developed index Test standard: ASTM E84 Requirements: Class A, B, C: 0-450
RAUVISIO brilliant	B2 (normal combustibility)	TBD	TBD
RAUVISIO crystal	B2 (normal combustibility)	180	750
RAUVISIO ingrain	B2 (normal combustibility)	TBD	TBD
RAUVISIO ferro	B2 (normal combustibility)	185	170

RAUVISIO House line	Fire behavior Test standard: ASTM E84 Requirements: Class A: 0-25 Class B: 26-75 Class C: 76-250	Flame spread index Test standard: ASTM E84 Requirements: Class C: 76-250	Smoke developed index Test standard: ASTM E84 Requirements: Class A, B, C: 0-450
RAUVISIO noir	Standard: Class B Fire resistant: Class A	Standard: 40 Fire resistant: 0	Standard: 40 Fire resistant: 0
RAUVISIO terra	Standard: Class B Fire resistant: Class A	Standard: 45 Fire resistant: 0	Standard: 80 Fire resistant: 0
RAUVISIO shade	TBD	TBD	TBD

Cabinet doors and fabrication



Engineering tomorrow's designs

Perfect each detail with [REHAU doors and components](#).



**Top surfaces,
top adhesion,
top edgeband**

**Custom made
with you, for
you**

**Global
engineering at
your fingertips**

Door styles

Slab



Offered in all RAUVISIO House lines

Sienna (3-piece)



Offered in RAUVISIO noir and
RAUVISIO terra

Shaker (5-piece)



Offered in RAUVISIO brilliant, RAUVISIO
noir, RAUVISIO shade, RAUVISIO terra
and RAUVISIO ingrain

Lamination

Different color on top/bottom

Mix top/bottom colors within the same RAUVISIO collection

Specialty cores

Fire-rated, NAF and marine rated (MR 50)

Special thicknesses

Custom thicknesses (standard core market sizes available)

White backer

Save costs with a generic white melamine backer

MDF core

Switch from standard particle board to MDF core



Edgeband

What is REHAU LaserEdge?

REHAU LaserEdge™ is an edgeband with a pre-applied, co-extruded polymer functional layer that replaces the traditional glue used to apply edgeband, allowing for a much superior and seamless joint between the edgeband and the board.



- **Permanent and functional invisible joint**
- **Increased heat resistance**
- **Improved moisture resistance**
- **Flawless appearance of total seamless integration**



REHAU LaserEdge

Zero-joint vs. glue

The difference is drastic in solid color panel design, especially when using white or light colors in high-gloss or matte options.

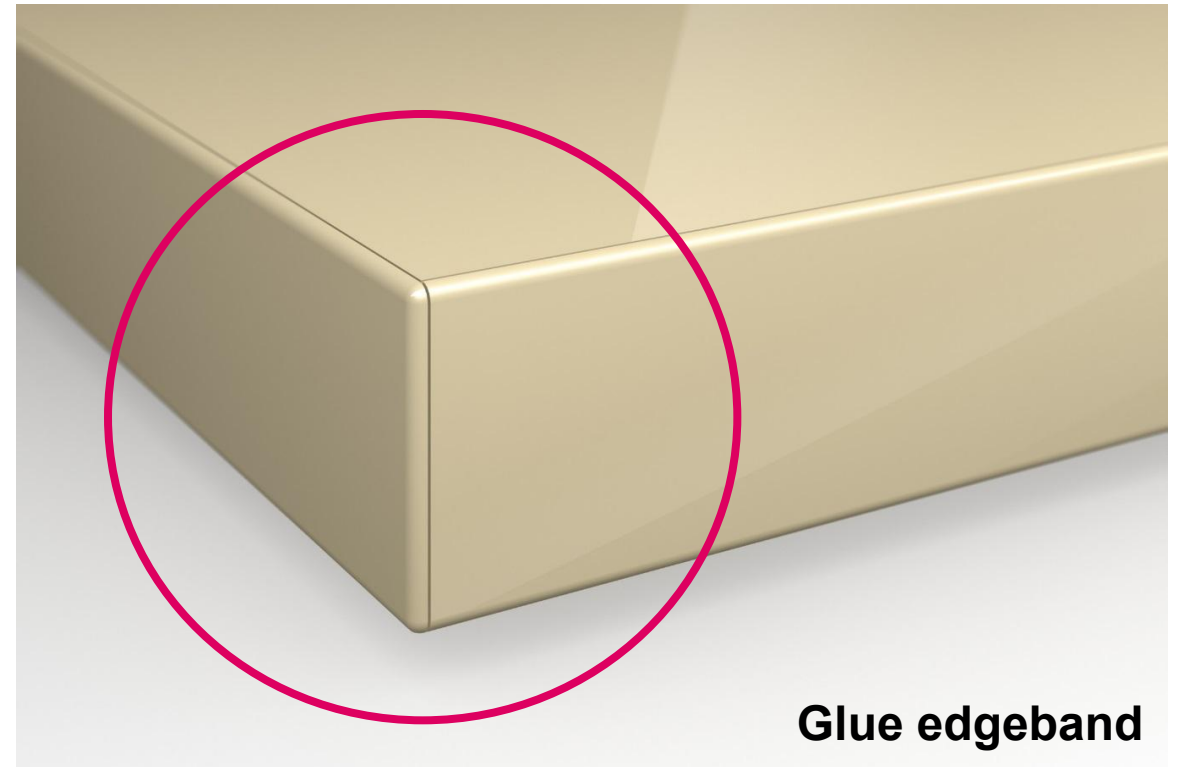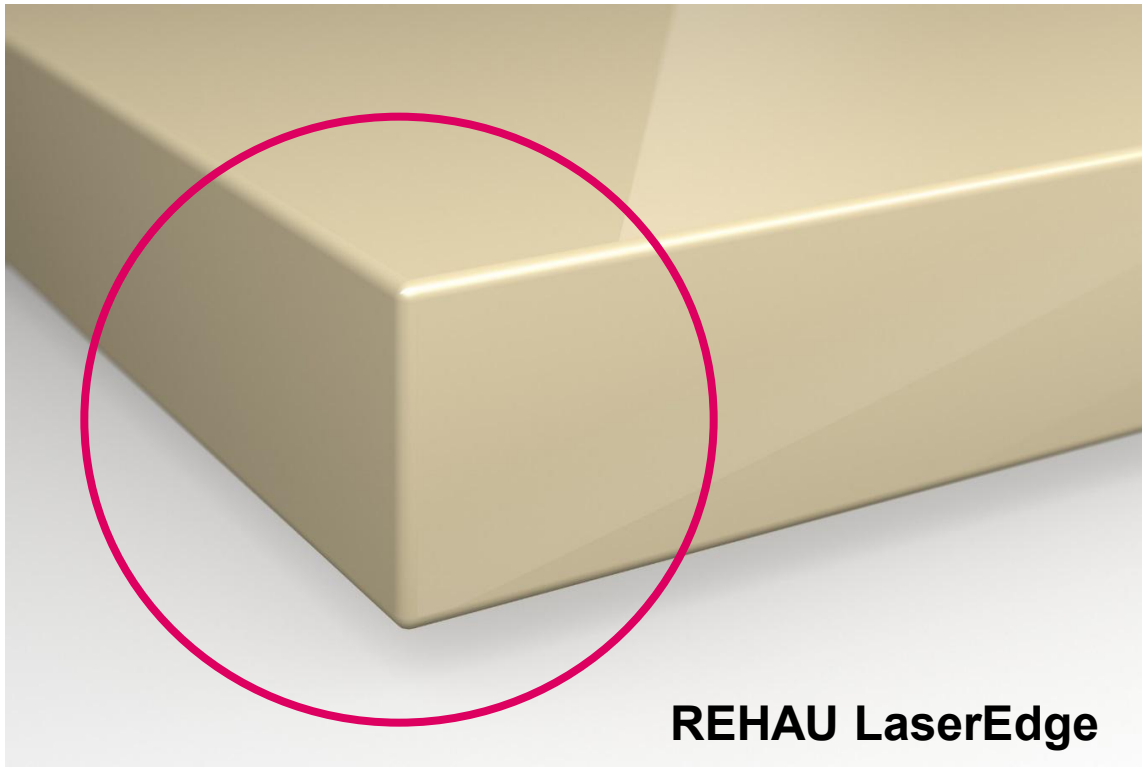



**Floating
shelves**

**Grain
matching**

Program additions

**Integrated
handles**



**Appliance
panels**

**Hinge
boring**

Edgeband



Add the perfect final touch to creative cabinet designs with **REHAU Integrated Handles**.


A soft touch and streamlined aesthetic to complement any modern design.

Hidden Recessed 2 mm

- The 2 mm handle is almost invisible and combines exceptionally well with a flat profile. It's also designed for upper cabinet doors.

J Channel 32 mm

- The 32 mm handle features a visible channel in multiple finishes with metallic end caps.

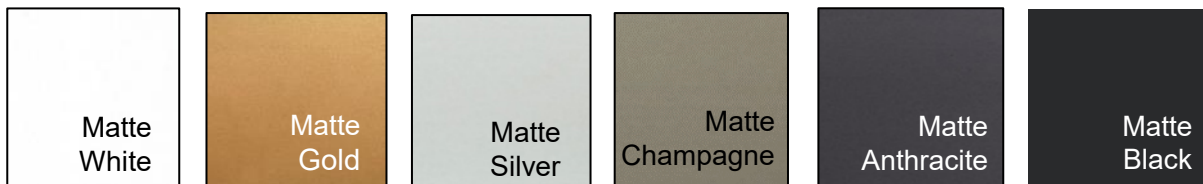


Expand storage while complementing modern cabinet design with **REHAU Floating Shelves**.

Capable of replacing the storage capacity of upper cabinets while lending airiness and uncluttered style to kitchen, bath and accent-wall design.

- Patented bracket design for storage capacity of up to 15 pounds per linear foot
- More beautiful and durable edge compared to self-edge
- Infinite design options for custom requirements
- Match cabinet doors or mix with curated collections
- Available in RAUVISIO brilliant, RAUVISIO terra, RAUVISIO noir and raw MDF
- Quick and easy installation with simple hand tools



Edgeband

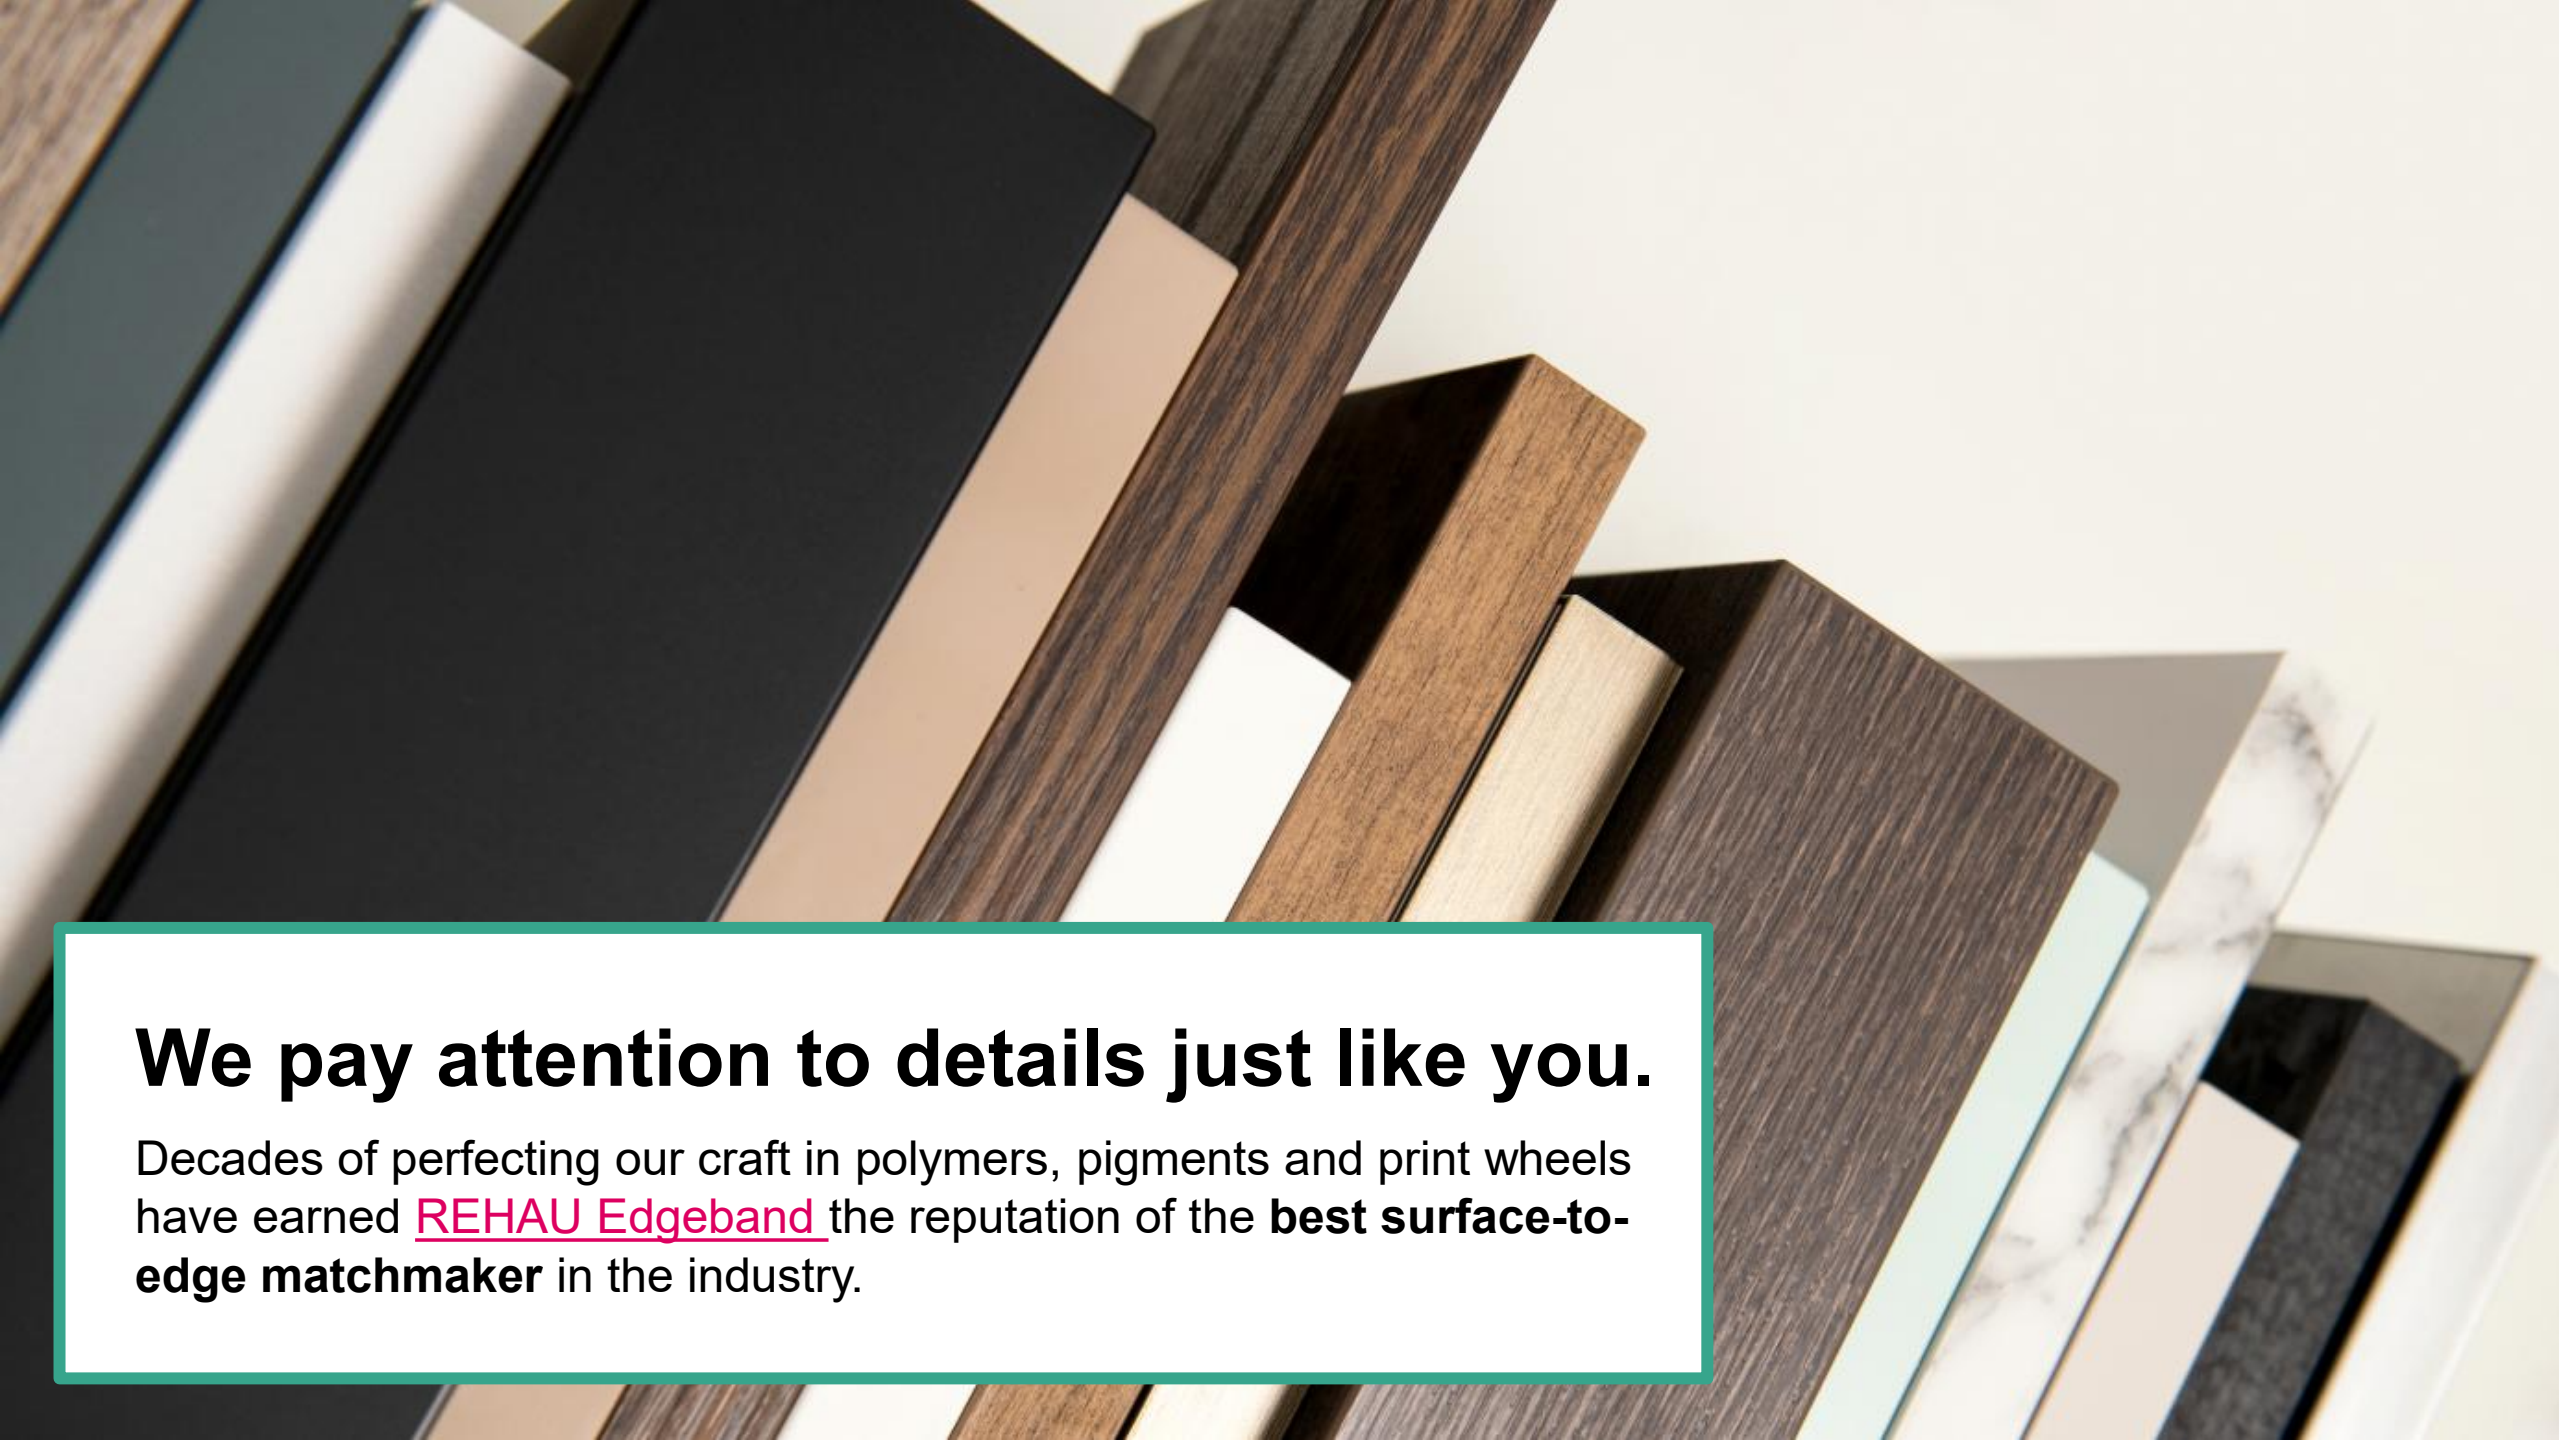

We pay attention to details just like you.

Decades of perfecting our craft in polymers, pigments and print wheels have earned [REHAU Edgeband](#) the reputation of the **best surface-to-edge matchmaker** in the industry.

Edgeband types.

REHAU makes different types of edgeband used for different applications and/or project requirements.

PVC (polyvinyl chloride)

- Available in a wide range of colors and sizes
- Superior machinability for easy processing
- Highlight: **REHAU FlexEdge** – flexible edgeband used with contour edgebanders that handles a radius as small as 12 mm without extra pressure or excess adhesive
- **Note:** Tends to pair with HPL brands (Wilsonart, Formica, Panolam etc.) and our older colors

PP (Polypropylene)

- Highest level of ecological benefit, fully recyclable
- Most color-stable chemistry and its flexibility allows for straight and contour processing
- Very good heat conductivity and absorption
- Excellent UV stability
- **Note:** Customer specific, no stocking

ABS (Acrylonitrile Butadiene Styrene)

- 99% naturally recyclable and chloride-free
- Lighter in weight and highly heat resistant
- REHAU LaserEdge capable
- Most shops move to ABS from PVC because there are no changes in planning, running or adjustments on machines
- Consistently growing colors in stock
- **Note:** Tends to pair with TFL brands (Tafisa, Uniboard, Arauco, etc.)

Specialties

- Mirror gloss – ABS with >85 gloss level and no orange peel
- Elegant matte – ABS with <6 gloss level and high scratch resistance
- Duo-design – PMMA (acrylic) with v-step design completely the real glass look
- Magic 3D – PMMA with transparent surface backed with decorative print

Zero-joint edgeband

What is REHAU LaserEdge?

An edgeband with a pre-applied, co-extruded polymer functional layer that replaces the traditional glue used to apply edgeband, allowing for a much superior and seamless joint between the edgeband and the board. It can be used with all zero-joint edgebanding machines including hot-air, laser and NIR. (yes, not just laser)


1. Creates a bond equal to or greater than PUR (no delamination)
 2. Achieve a monolithic panel look at a much lower price than solid or painted
 3. Higher quality edging allows you to promote a higher-end finished product at a premium
- Enhancing leading industry trends (high gloss and textured panels) with no framing effect
 - No glue joint to collect dirt, chip away or yellow over time
 - Extremely heat- and moisture-resistant bond
 - ABS and PP (advanced green polymers) are the most common materials used by REHAU globally
 - No hotmelt or down-line cleaning of excess adhesive from finished panels
 - Increased edgeband costs are easily offset by the upscale finished product to the market
 - PP functional layer (longer lasting high-quality) versus TPU layer

Online tools

Cabinet Door Order Portal

Instantly quote and order fully-finished cabinet doors online


- Step-by-step ordering / quoting process
- Can enter and receive exact custom sizes
- Multiple styles and lines all in one order

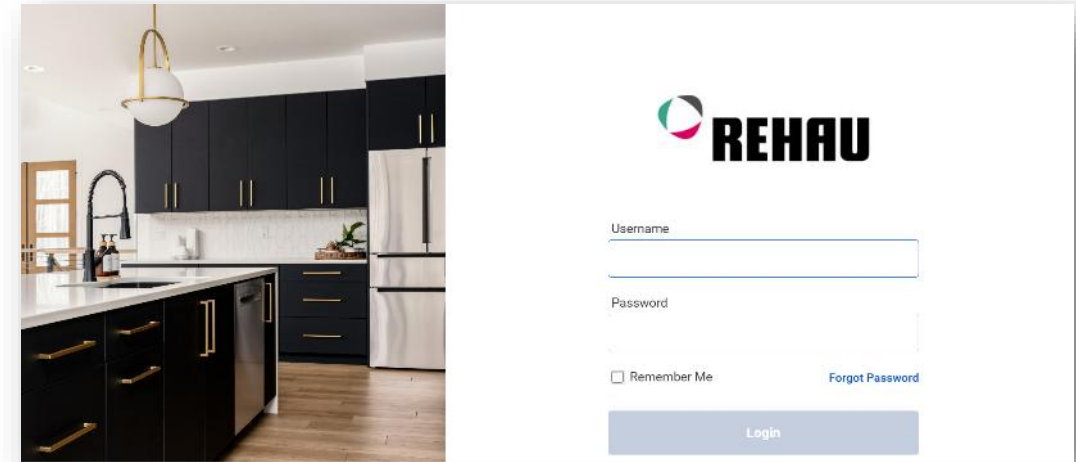

REHAU Marketplace

Search, sample, and order edgeband online

- Matches for the latest collections of the leading HPL and TFL manufacturers
- Check stock on demand
- Order up to 10 free samples

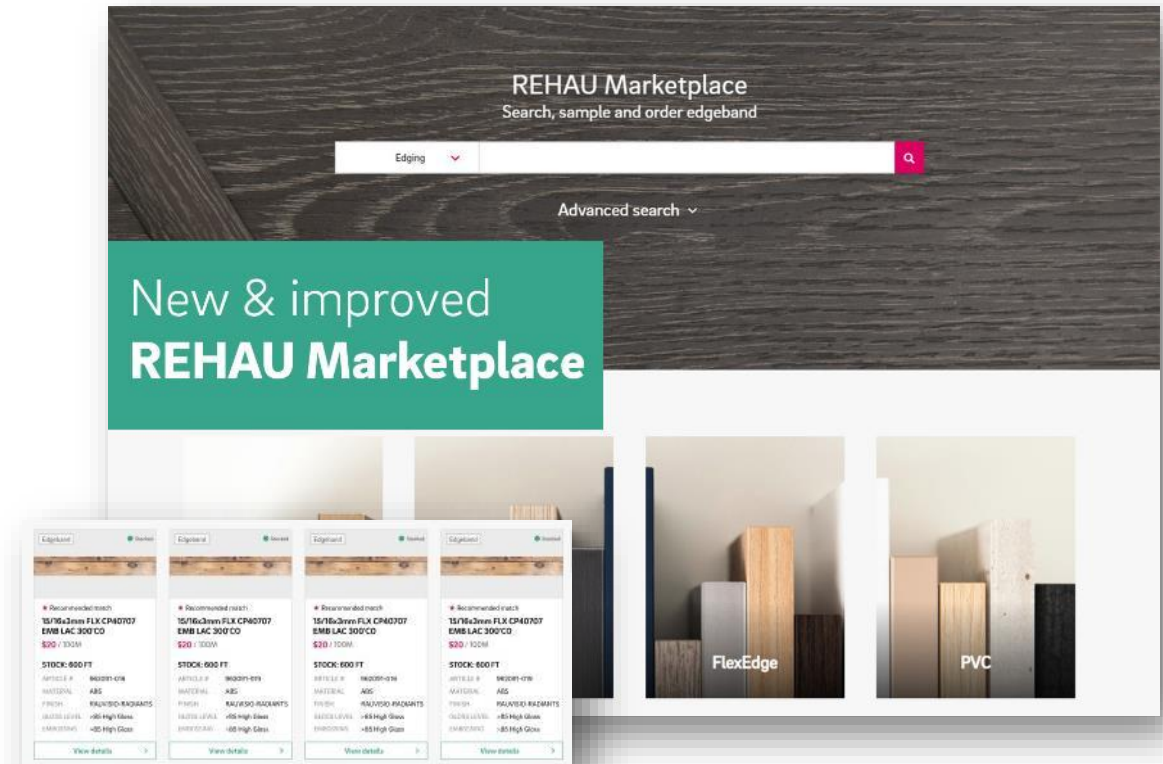

Questions?