



C A F E

coffee

drip.....5
cold brew.....4
espresso.....2
flat white.....4
cappuccino.....3
latte.....4
mocha.....5

tea

green tea.....5
genmaicha.....6
sencha tea.....8
rooibos.....4
white tea.....3
oolong.....4
pure-erh.....5

food

apple pie.....5
brownie.....4
blondie.....2
cookie.....4
muffin.....3
cheese.....4
machi.....4

cold drink

still water.....5
sparkling.....4
lemonade.....2
soda.....4
orange juice.....3
apple juice.....4
machi.....4

Engineering progress
Enhancing lives

**Blend resilience
and softness with
RAUVISIO shade.**

na.rehau.com/shade



REHAU

RAUVISIO shade™

complete program guide

Contents

General information

- 4** Curated color collection
- 6** Finished door & component options
- 7** Material options
- 8** Material properties & performance
- 10** Technical guide
- 19** Warranty

Specification sheets

- 21** Board spec sheet
- 23** Cabinet door spec sheet

By diffusing light and giving elements around it vivid definition, **RAUVISIO shade** super-matte PET surface unveils a space as a work of art. Its powdery finish is made of recyclable materials, allowing you to make a modern mark with sustainability in mind. Let the softness of double-sided matte define the foreground of your unit, boutique, reception or workspace. Whatever your focus, bring your subject into light.

This manual contains safety-related information that requires your special attention. It is indicated with the safety alert symbol and the signal words described below:

 DANGER	Indicates a hazardous situation which, if not avoided, will result in death or serious injury.
 WARNING	Indicates a hazardous situation which, if not avoided, could result in death or serious injury.
 CAUTION	Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.
NOTICE	Indicates a risk of property damage, including damage to the individual components.

This document is protected by copyright. The rights conferred therein, in particular those relating to the translation, reprinting, extraction of pictures, electronic transmissions, reproduction by photo-mechanical or similar means and storage on data processing equipment, remain reserved.

All dimensions and weights are approximate. Subject to errors and modifications.

Unbound shades.


This new blurred and shaded line broke conventions of the past. Notions of line as something that contained, restricted and bound were replaced by an invisible line whose hints created faint color hues. These new techniques inspired poets and writers to challenge their binary notions and reinvent a third way, a more ambiguous way that was truer to real life. These soft and hazy undertones made what laid on top more vibrant. It gave an intimate feeling, brought out a warmth in its subjects that created a striking real-life effect. This concept plays out when **RAUVISIO shade** brings an augmented softness to your designs, going beyond boundary, diffusing light, giving the elements around it vivid definition.

This palette of neutral hues allows you to soften your living space and place an emphasis on the elements that matter to you most. Choose a hue that's already a classic.




Canvas

3103

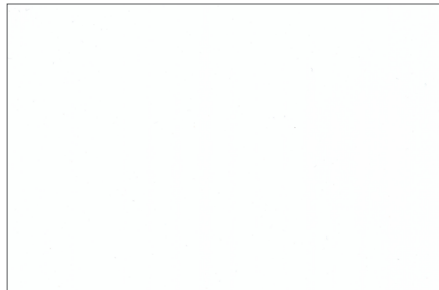


Chalk

2001

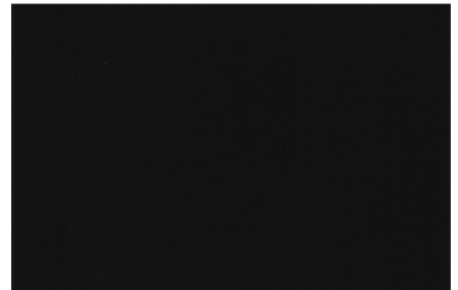


Charcoal

5000

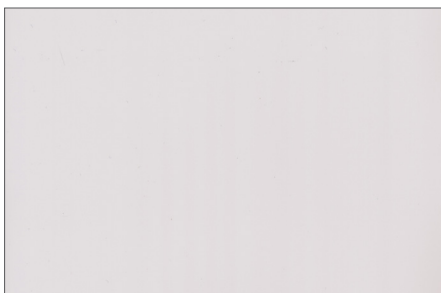


Clay

3300

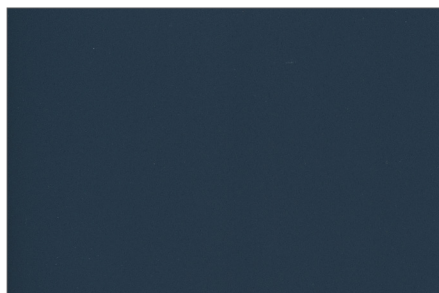

Indigo

6150

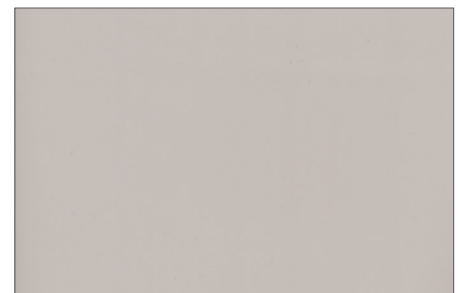

Pewter

3001



Finished door & component options

Profile specifications

Appearance	Matte
Door style	Slab and shaker
Design style	Modern, contemporary
Construction	Colored PET film laminated to particle board core, REHAU LaserEdge
Shaker stiles and rails	3 in (76.2 mm), custom widths also available
Face material	PET film, multiple colors
Back material	PET film, multiple colors
Edgeband	REHAU LaserEdge, matching color
Core	Particle board
Board thickness	3/4 in (19.8 mm)

Cabinet door size parameters

Minimum slab	3 x 5 in (76.2 x 127 mm)
Maximum slab	47 x 109 in (1193.8 x 2768.6 mm)
Minimum shaker	8-7/8 in W x 11 in H (225.4 mm W x 279.4 mm H)
Maximum shaker	30 in W x 65 in H (762 mm W x 1651 mm H)


Edgebanding profile

Top edge	1.0 mm radius
Bottom edge	1.0 mm radius
Edgeband finish	Elegant matte, color matched


Accessory products

1/4 in. thick components	Cut-to-size with raw edges
--------------------------	----------------------------

Slab profile

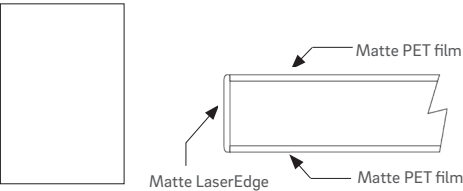

Shaker profile

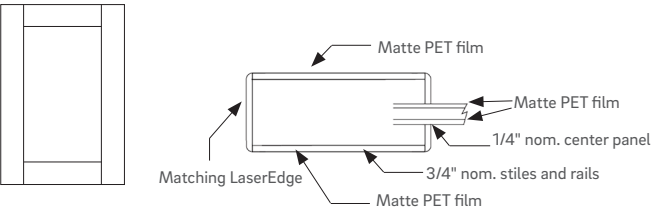

Material options

Board specifications

Construction	Colored PET film laminated to particle board core
Face material	PET film, multiple colors
Back material	PET film, multiple colors
Core	Super-refined MDF
Size	48 x 110 in x 19.8 mm

Edgebanding options

ABS	15/16 in x 1.0 mm x 100 M
ABS LaserEdge	15/16 in x 1.2 mm x 100 M

Features & benefits

- PET laminate made with up to 80% recycled material
- Soft touch finish
- Scratch, fingerprint and bacteria resistant
- Excimer lacquering for increased durability
- Superior UV stability
- Low light reflectivity
- Inexpensive alternative to paint
- Clean cutting and processing
- Double-sided finished panel or cabinet door
- Value-engineered option for large commercial projects

Cleaning and care

Clean with a damp microfiber cloth and mild soap if needed. While the surface is scratch resistant, it should never be dry-wiped. Avoid abrasive cleaners, solvent-based cleaners and harsh chemicals. Do not use paper towels, brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

Protective coat

A protective peel coat is applied to the top of the matte surface. Do not expose peel coat to direct sunlight before removal. Remove promptly after installing cabinet but prior to mounting decorative hardware. To remove peel coat, use rubber fingertips or our peel coat removal tool.

na.rehau.com/shade

Material properties & performance

Visual characteristics

	Test standard	Requirements	Result
Surface gloss level	ALFA AW A16/10	-	3 +/-1 GLE
Color	AMK-MB-009, 09/2011	No significant changes to master sample	Pass
Surface	AMK-MB-009, 09/2012	Uniform surface, no defects visible from 0.7m	Pass
Lightfastness	DIN EN ISO 4892-2 Art B (behind window glass)	Assessment according to blue scale	5 (except part 5, use method B indoor)
	Assessment according to DIN EN ISO 105 A02	Assessment according to blue scale	≥ Level 4

Surface properties

Chemical resistance	DIN 68861/T1	Matte: 1B	1B
Scratch-resistance	UNI EN 438/25	-	Rating 3. 2N faint marks, 4N continuous scratch
Micro-scratch resistance	IHD-W-466 (Art. A)	Matte: Class 2	Hoffman test: 5N
Resistance to surface wear	EN 438-2.10	Initial point	4

Material properties

Top laminate raw density	DIN EN 323	-	1.35g/cm ³
Formaldehyde emissions	EN 622 and TSCA Title VI	Class E1: < 0.09 PPM TSCA: < 0.11 PPM	E1/CARBII/TSCA Title VI

Environmental

Indoor air comfort - Ultra low VOC	RAL-GZ 430	Less than 3 mg/m ³ TVOC after 3 days, less than 0.4 mg/m ³ after 28 days	Pass (0.0mg/m ³)
------------------------------------	------------	--	------------------------------

The solid-extruded **RAUVISIO shade** super-matte PET surface offers superior durability and is made with up to 80% recycled material. Its UV-cured excimer lacquer provides low-light reflectivity, impact and fingerprint resistance and a soft super-matte finish. **RAUVISIO shade** is crafted in Italy and applied to a particle board core stateside using PUR glue. Offered as double-sided boards and edgeband or fabricated panels and cabinet doors with perfectly matched REHAU LaserEdge™, this surface brings unbound soft resilience to your project.



Technical guide

01 Information and safety notes

Latest version of the technical information

To ensure your safety and proper use of our products, please regularly check whether a more recent version of the technical information is available.

You can obtain the latest version of the document from your local retailer, your REHAU sales office or download it from na.rehau.com/shade

Proper use

RAUVISIO products may only be planned, processed and installed in accordance with this technical information. Any other use is in violation of the specifications and is therefore prohibited.

Suitability of the material

The relevant, valid technical information is to be observed for the processing/assembly and use of RAUVISIO products. Our technical information is based on empirical values and knowledge acquired up to the time of printing. The transmission of this information includes no assurances as to the properties of the products described. No explicit or implicit guarantee may be derived from it. The information does not release the user/purchaser from their obligation to assess the suitability of this material and the correct processing thereof to attain the required results in terms of objective and application.

Publication of information

It is essential to ensure that your customers, also including end customers, are aware of the necessity to observe the current technical information as well as instructions for the care and use for RAUVISIO products. The instructions for use and care must be provided to the end customer either by yourself or by your customer.

Note to our distribution partners and customers that resell RAUVISIO products:

Please also inform your customers about the need to observe the current technical information and make them available to your customers.

Note to the processor:

Please ensure that at least the installation guidelines and the instructions for use and care are made available to your customers and processing and installation firms.

Safety information and installation instructions

Observe the instructions on the packaging, accessories and installation instructions. Keep the installation instructions handy for easy access.

If you do not understand the safety information or the individual installation procedures or if something is unclear, please contact your REHAU sales office.

Applicable guidelines and safety equipment

Strictly observe all applicable safety and environmental regulations as well as the regulations of the trade supervisory authority and the employers' liability insurance association. Such regulations always take precedence over the information and recommendations in this technical information.



CAUTION

To reduce the risk of injury always use safety equipment such as

- Gloves
- Safety goggles
- Ear protection
- Dust mask

Adhesives and auxiliary materials

Strictly observe the safety instructions for any adhesives.



CAUTION

To reduce the risk of injury always store work equipment such as alcohol-based cleaning products and other easily flammable materials in safe and well-ventilated places.

Ventilation/extraction, production dust

Ensure adequate ventilation and extraction for the processing machines.



CAUTION

To reduce the risk of injury, do not inhale production dust. If you inhale production dust, get fresh air and seek medical attention if you experience any symptoms.

Ventilation/extraction, production dust

Dust created by drilling, sawing, sanding or machining wood products can expose you to wood dust, a substance known to the State of California to cause cancer. Avoid inhaling wood dust or use a dust mask or other safeguards for personal protection. Appropriate protective measures should be taken when processing this material.

California residents, visit www.rehau.com/us-en/ca-prop-65 for more information.

Protective measures and disposal

RAUVISIO shade is a composite made of wooden substrate and polymer surface coating, which has ecologically sound properties. The dust that forms is not toxic. The dust concentration is to be minimized through suitable protective measures such as extraction or a dust mask.

Dust from RAUVISIO shade does not pose any specific risk of explosion.

Disposal code in accordance with the Waste Catalogue Ordinance:

- 170203/Construction and demolition waste consisting of wood, glass, plastic
- 120105/Waste from mechanical shaping processes and from the physical and mechanical surface treatment of metals and plastics (plastic shavings and lathe shavings)

Fire behavior

Due to its composition of wooden substrate and PET foil, RAUVISIO shade demonstrates favorable fire behavior and is classified as per DIN 4102-B2 as being of normal flammability. In case of fire, no toxic substances such as heavy metals or halogens are released. The same fire-fighting techniques can be used as for other construction materials containing wood.



WARNING

To reduce the risk of serious injury or death use the following fire extinguishing procedures.

Extinguishing fires

Suitable extinguishing agents for fighting fires are

- Water spray
- Foam
- CO₂
- Extinguishing powder

A water jet is unsuitable for safety reasons.

When extinguishing fires, wear appropriate protective clothing and, if necessary, a self-contained breathing apparatus.

02 Product description

2.01 Validity

RAUVISIO shade is a matte PET surface with a UV-cured lacquer. The surface is laminated on both sides of a high-quality, particle board. All components are provided with perfectly matched REHAU LaserEdge™.

RAUVISIO shade features the following advantages:

- Hygienic
- Non-porous
- Can be processed using conventional woodworking tools
- Suitable for increased exposure to moisture (in conjunction with optimized moisture resistance edging)

2.02 Individual components

Surface

RAUVISIO shade is a multi-layer, polymer surface, which is applied continuously using rollers. The hard coat finish guarantees increased chemical and scratch resistance.

Wooden substrate

The use of a homogeneous and finely sanded wooden substrate guarantees a smooth finish.

Edgeband

The use of a REHAU edgeband material is recommended to create a uniform appearance between the RAUVISIO shade surface and the edge. The best visual results are achieved by using REHAU LaserEdge. No optical joint is visible here thanks to the pigmented polymer functional layer in the edging color. The REHAU LaserEdge edgeband product range can be supplied to match the surface in the materials ABS (acrylonitrile-butadiene-styrene). Correct processing is described in the processing guidelines separately.

For further information, please contact your REHAU sales office. The resulting component quality (e.g. adhesion of the edgeband, appearance and application properties) depends on the machine settings and the board quality used and must be checked by the fabricator. Optimum machine parameters, tool configuration and cutting speeds are to be established individually prior to production using a series of samples; the REHAU applications engineering department will be happy to support you with this.

2.03 RAUVISIO shade composite pressed board

RAUVISIO shade is available as a pressed board, 1245 x 3073 x 19.8 mm (49 x 121 x 3/4 in) consisting of a double-sided PET laminate decorative surface.

03 Transport, packaging and storage

NOTICE

To reduce the risk of property damage use the following transport, packaging and storage procedures.

3.01 Transport and loading information

Check the exterior packaging for damage immediately when the goods arrive:

- If damage has occurred, open the packaging in the presence of the freight carrier and record the damage to the goods.
- This must be confirmed by the freight carrier with their name, company, date and signature.
- **The damage must be reported to the freight carrier within 24 hours. Otherwise the freight carrier's insurance company will not accept liability.**

Transport

The boards must not be exposed to temperatures higher than 50°C (122°F) during transport to avoid thermal overloading of the adhesive/laminate system.

Exposure to extreme temperatures may cause the adhesive and surface laminate to interact, which can result in orange peel/rippling and thus adversely affect the appearance.

Delivery

Boards are loaded and shipped on square timber battens or pallets to ensure they are kept flat.

- Ideally, packaging units should be unloaded with a forklift or similar equipment.
- If the required equipment is not available, the boards can be unloaded by hand. When doing this, it must be ensured that the boards do not become dirty and are not subjected to any mechanical loads.
- Suitable protective equipment, such as gloves, should be worn during manual handling as sharp edges can cause cuts.
- The use of transport aids such as suction lifters, lift handles and board transporters is recommended for handling.
- Bending is not permitted when transporting the RAUVISIO boards horizontally.

3.02 Packaging

Protect the boards with foam non-woven material.

With RAUVISIO shade, the edges and surfaces must be protected under all circumstances. Particularly when moving, picking and further processing the boards, avoid or remove any dirt or foreign materials that may get between the individual boards. Otherwise the stack weight/dead weight of the boards will inevitably lead to pressure marks on the laminate surface.

- Protect the surfaces with foam non-woven material. This will prevent any impurities from marking the surface when pressure is applied to the surfaces.

3.03 Internal transport and storage

Internal transport

RAUVISIO shade must be kept flat, level and fully supported along its entire length during transportation. Ideally RAUVISIO shade should be transported in its original packaging. No repacking recommended.

Storage

RAUVISIO shade is supplied on pallets or square timber battens covered with appropriate protective boards. The packaging units with RAUVISIO shade are stackable. Due to the stack pressure, however, it is not permitted for more than four packaging units to be stacked on top of one another.

Protecting the packaging units.

The packaging units are to be protected against damage, large fluctuations in temperature and humidity, as well as high UV levels of artificial lighting or direct sunlight.

Store boards flat and level.

RAUVISIO shade must be kept flat, level and fully supported along its entire length during storage and transportation. It is recommended to store boards on the supplied pallet. Alternatively, boards must be supported by a minimum of 4 evenly spaced timber battens of equal size. This will prevent bending or warping.

In the event of storage in conditions not in line with those described above (pallet or on at least 4 equal battens), no assurances can be given against warping.

The material must be stored in closed, heated rooms in which the room temperature is between 15 and 25°C (59 and 71°F) and the relative humidity is between 40 and 60%.

Before opening the packaging unit, the goods must have an acclimation period at room temperature of at least 48 hours or longer depending on the season.

After opening and removing a quantity of the product, it must be ensured that the cover panel remains on top of the goods during re-storage, in order to prevent soiling and asymmetrical temperature/humidity effects (e.g., through draughts or heated air) and thus counteract warping or surface damage.

04 Prior to processing

NOTICE

To reduce the risk of property damage use the following unpacking and conditioning procedures.

4.01 Unpacking

Before opening the packaging unit, the goods must have an acclimation period at room temperature of at least 48 hours or longer depending on the season.

Carefully unpack the boards.

When opening the packaging, ensure that the surfaces are not damaged by sliding or sharp objects. Appropriate lifting technology must be used to separate the boards.

Open the packaging with package shears.

Do not use sharp objects!

1. Cut the packaging tape.
2. Cut the protective foil vertically.
3. With 2 people and 4 suction cups carefully lift the top board vertically, without sliding it, or carefully remove carton if individually packed.
4. Remove any debris or contamination that gets between the individual boards.

4.02 Checking the boards

Please check the RAUVISIO shade system components for the following points before further processing, i.e., finishing the goods:

- External damage such as cracks or dents
- Surface damage or blemishes
- Planarity (for pressed boards)
- Color uniformity within the production batch

The surfaces of RAUVISIO shade are always supplied with a protective film applied. Despite this protective film, it may be that there are occasional minor defects in the laminates on delivery. This cannot be avoided completely due to the production process and does not represent a direct cause for complaint.

When grouping different boards into one order, it is to be ensured that only boards of the same production number are used. When processing sheets with different batch numbers, it is imperative to check the color compatibility prior to processing.

Color consistency should be checked in natural daylight, although bright sunlight should be avoided. In case of deviations a colorimeter should be used.

Any costs resulting from checking the above points shall not be borne by REHAU. This also applies to follow-on costs in the subsequent processing of defective goods.

4.03 Conditioning

RAUVISIO shade and all other materials to be processed such as the adhesive and edgebands must be conditioned at room temperature (at least 18°C [65°F]) for a sufficient period of time (at least 48 hours).

Processing is also carried out at room temperature. It is to be ensured, in particular in the colder months, that conditioning of all boards takes place. If the size of the stack prevents the boards in the middle from acclimating sufficiently, the acclimation period must be extended accordingly.

4.04 Documents for the material warranty

In order to process complaints, the delivery notes for the goods and the shipping labels must be retained.

The imprint on the edge of the substrate can be used to clearly identify the production batch. This must be communicated to the REHAU sales office in the event of a complaint.

05 Processing RAUVISIO shade

NOTICE

To reduce the risk of property damage use the following processing procedures.

5.01 Proper handling of RAUVISIO boards

Placing the boards on the machine table

The machine table must be of sufficient size, have no sharp edges and must be thoroughly cleaned.

Alternatively, cover the machine table with a clean base (wooden board, cardboard, etc.).

Formatting the boards

The nesting procedure is recommended to format the board. When formatting with a saw, be sure to observe the instructions for placing the board on the machine table (see above). In this case, work with a scoring saw blade.

Between the processing steps

After milling/sawing, all residue must be removed and all surfaces cleaned.

For transport, place the boards vertically and individually on appropriate trolleys.

Alternatively, stack the boards on a pallet with a clean and pliable layer of cardboard or foam between them.

Edging the boards

When edging the boards, work with a static inhibitor to prevent shavings from sticking to them.

Ensure that the boards are fed into the machinery in a clean and orderly fashion.

Any shavings or dust must be safely removed through the extraction unit.

Drilling and milling

When drilling/milling, any sawdust or shavings must be safely removed, e.g., through suction or blowing.

Packing the boards

Stack the workpieces in layers with clean and padded carton/foam material inserted in-between each layer on a pallet.

Use a transport lock to prevent damage due to slipping or similar.

5.02 Mechanical processing of the pressed board

Sawing/milling/drilling

RAUVISIO shade can be processed with most conventional woodworking tools. When cutting RAUVISIO shade, a scoring saw blade must be used.

In order to enable precise processing, it must be ensured that the tools are sharp and that ideal machine settings are used. It is recommended that the optimal machine settings are determined by means of trials prior to starting production.

5.03 Edging

The use of REHAU elegant matte edgeband material is recommended to create an interlocking joint between the RAUVISIO shade surface and the edge. The best visual results are achieved by using REHAU LaserEdge. No joint line is visible thanks to the color-matched polymer functional layer of the edgeband color. A range of matching ABS edgeband is available to compliment this product. This edgeband material can be polished, resulting in a finished component with an impressive invisible joint.

For more information, please contact your REHAU sales office. The resulting component quality (e.g., adhesion of the edgeband, appearance and performance characteristics) depends on the machine configuration and the raw materials and must be checked by the processor.

Optimum machine parameters, tool configuration and cutting speeds are to be established individually prior to production using a series of samples; the REHAU applications engineering department will be happy to support you with this.

06 Technical data

Product data	Test standard	RAUVISIO shade pressed board on directly coated substrate MDF substrate 18.5 mm
Thickness	as per technical drawing as per DIN 324-1	19.8 mm ± 0.4 mm
Width	as per technical drawing as per DIN 324-1	1245 mm ± 3 mm
Length	as per technical drawing as per DIN 324-1	3043 mm ± 5 mm
Angle deviation	as per technical drawing as per DIN 324-2	± 3 mm/m
Edge defects	as per technical drawing	15 mm
Weight per square meter		14.7 kg/m ²

Visual properties	Test standard	Requirement	Test result
Gloss level of the surface	AMK-MB-009, 04/2013	Measurement with 60° measurement geometry	≤ 3 GLE
Lightfastness	Based on DIN EN ISO 4892-2, process B Duration of the test: to DIN EN ISO 105 B01-B06	Assessment according to the blue scale	grade 6
	Assessment of the sample: to DIN EN ISO 105 02	Assessment according to the grey scale	≥ level 4

Surface properties	Test standard	Test result
Stain-resistance	EN 12720	5
Scratch-resistance	EN 438-2.25	3

07 Installation guidelines

1. Fabricated components should only be transported on the original packaging unit.
2. Always unload packaging units sideways and from the middle.
3. Fabricated components should always be stored on the original pallet or using four-timber storage.
4. The storage of the fabricated components must not be stored outside or in damp environments.
5. Fabricated components should always be stored appropriately at the installation location and not exposed to strong UV light sources.
6. Acclimate fabricated components prior to installation for at least 24 hours at room temperature (min. 18°C [65°F]). At delivery temperatures below 0°C, acclimate the elements for at least 48 hours on all sides.
7. No objects are to be rested on raw boards and fabricated components as these could cause damage.
8. RAUVISIO shade is suitable for vertical applications indoors. Inquire and check with the manufacturer about special application cases if necessary.
9. All materials and components must be checked for damage or defects prior to processing/assembly.
10. Temporary storage must take place prior to installation exclusively in the original packaging in frost-free and closed rooms.
11. Load-bearing substructures, which are firmly connected to each other, are to be aligned so that they are flat and vertical.
12. To avoid stress cracks no bending should occur during processing and assembly.
13. Do not bring unprotected corner connections of wooden substrates into contact with moisture prior to assembly.
14. In the case of wooden substrates all cut edges and raw board edges must be sealed so that they are watertight.
15. All drilled holes in the wooden substrates must be sealed during assembly so that they are watertight.
16. No strong solvents, special cleaners (e.g., drain cleaners, industrial cleaners, lubricants or abrasive cleaning cloths) or strong chemical substances must be used on the surface.
17. Heavy dirt can cause scratches during cleaning, therefore always clean dirty areas carefully with a microfiber cloth.
18. Do not stand on unassembled or assembled RAUVISIO shade components.
19. Assembly for indoor vertical applications only

08 Operating/maintenance instructions for end users

The non-porous, homogeneous lacquer laminate is hygienic and suitable for contact with food and is resistant to fungal and bacterial growth.

RAUVISIO shade is a polymer surface material that is pleasant and soft to the touch.

Clean with a damp microfiber cloth and mild soap if needed. While the surface is scratch resistant, it should never be dry-wiped. Avoid abrasive cleaners, solvent-based cleaners and harsh chemicals. Do not use paper towels, brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

RAUVISIO shade is resistant to most substances found in the household. An extended exposure to aggressive substances can leave behind marks or damage the material.

The table shows the mediums tested and the exposure time:

Substances	Stress group 1A/1B RAUVISIO shade	
	T	A
Acetic acid	16 h	5
Citric acid	16 h	5
Ammonia water	16 h	5
Ethyl alcohol	16 h	5
Red wine	16 h	5
Beer	16 h	5
Cola	16 h	5
Coffee	16 h	5
Black tea	16 h	5
Black currant juice	16 h	5
Evaporated milk	16 h	5
Water	16 h	5
Petrol	16 h	5
Acetone	10 s	5
Ethyl-butylacetate	10 s	5
Butter	16 h	5
Olive oil	16 h	5
Mustard	16 h	4
Onion	16 h	5
Disinfectants	10 min.	5
Cleaning agent	16 h	5
Cleaning solution	16 h	5

Assessment according to DIN EN 12720 (07/2009)

Chemical durability	Result
5	No visible change
4	Just noticeable change in gloss or color
3	Slight change in gloss or color; the structure of the test surface is not changed
2	Heavy marks visible; the structure of the test surface is however largely undamaged
1	Heavy marks visible; the structure of the test surface is changed
0	Test surface severely changed or destroyed

T Exposure time

A Requirement as classification code to DIN EN 12720:2009-07

h Hour(s)

s Second(s)

m Minute(s)

RAUVISIO

Panel and finished component limited warranty

10-year limited warranty

REHAU Industries LLC

On the terms set forth in this Limited Warranty, REHAU Industries LLC ("REHAU") warrants to the Authorized Claimant that the Covered Products will be free from Covered Defects during the Warranty Period.

Adjusted Warranty Payment: For the first two years of the Warranty Period, coverage includes 100% of the purchase price paid by the Original Purchaser for the defective Covered Products. For the remaining time of the Warranty Period, the Adjusted Warranty Payment shall be equal to such original purchase price reduced by 10% for each year after the end of year two of the Warranty Period.

Authorized Claimant: The Original Purchaser or the Original Property Owner; shall not include a subsequent purchaser of the real property.

Claims Procedure: All claims under this warranty must be submitted by the Authorized Claimant, in writing, promptly following discovery and must further submit proof of date of purchase. REHAU may require damaged product to be returned prior to judgment of claim. REHAU upon receipt of the above, within a reasonable time frame, will inspect the Covered Products.

For RAUVISIO panels:

"Covered Defects" are (i) a lack of flatness greater than 1.5 MM per 1 FT in any direction, (ii) a color change (of solid color surfaces only) from the original color supplied beyond a Delta E of 4.0, or (iii) delamination of the decorative surface to the wooden substrate. Covered Defects do not include defects and damages due to: (a) fabrication of Covered Products, (b) installation or altering of Covered Products, (c) ordinary wear and tear, (d) any failure of Original Purchaser, Property Owner, or any third party to comply with any recommendations of REHAU as to the fabrication, transportation, use or storage of Covered Products, and (e) accidents, misuse, abuse, chemicals, excessive temperature, water damage, impact of foreign objects, or any other causes or occurrences beyond REHAU's control.

For RAUVISIO finished components:

"Covered Defects" are (i) a lack of flatness greater than 1.5 MM per 1 FT in any direction, (ii) a color change (of solid color surfaces only) from the original color supplied beyond a Delta E of 4.0, or (iii) delamination of the decorative surface or edgebanding. Covered Defects do not include defects and damages due to: (a) fabrication of Covered Products, (b) installation or altering of Covered Products, (c) ordinary wear and tear, (d) any failure of Original Purchaser, Property Owner, or any third party to comply with any recommendations of REHAU as to the fabrication, transportation, use or storage of Covered Products, and (e) accidents, misuse, abuse, chemicals, excessive temperature, water damage, impact of foreign objects, or any other causes or occurrences beyond REHAU's control.

"Covered Products" are laminates, panels, or finished components manufactured by REHAU for use in kitchen cabinet doors or other finished components in accordance with the recommendations and specifications of REHAU. These "Covered Products" are for indoor use only.

"Original Purchaser" is an individual or company that directly purchases Covered Products from REHAU.

"Original Property Owner" is the individual (or if more than one, individuals) or company that owns the real property at the time of installation of the Covered Products.

"Remedy" If REHAU determines that a claim is valid in accordance with the terms of this warranty, REHAU will at its option, either pay to the Authorized Claimant the Adjusted Warranty Payment for said defective Covered Product, or repair the defective Covered Product, or replace the defective Covered Product by shipping replacement finished products. If the defective Covered Product is no longer in production or for any reason is no longer available, REHAU will substitute, at its discretion, similar finished panels as a replacement. The Warranty Period for replaced defective Covered Products will continue to be covered under the original Warranty Period.

"Warranty Period" is ten years from the date of purchase of the Covered Products by the Original Purchaser.

THE WARRANTY GIVEN IN THIS DOCUMENT IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED ON THE PART OF REHAU. REHAU DISCLAIMS ANY WARRANTY, EXPRESS OR IMPLIED, OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT WILL REHAU BE LIABLE FOR INDIRECT, CONSEQUENTIAL OR INCIDENTAL DAMAGES, INCLUDING, BUT NOT LIMITED TO, COSTS INCURRED IN THE FABRICATION OF THE REPLACEMENT PRODUCTS, INSTALLATION OF THE FINISHED PRODUCTS INTO THE STRUCTURE OR LOSS OF PROFIT, REVENUE OR GOODWILL WHETHER ARISING FROM NEGLIGENCE, TORT, CONTRACT, STRICT LIABILITY OR OTHERWISE. EXCEPT FOR THE EXPRESS LIABILITY SET FORTH ABOVE, REHAU DOES NOT ASSUME ANY FURTHER OBLIGATIONS OR LIABILITY. Some states or provinces may not allow limitations on implied warranties, and some states may not allow the exclusion or limitation of incidental or consequential damages, so these limitations or exclusions may not apply to you. These warranties give you specific legal rights, and you may also have other rights which vary from state to state or province to province.



RAUVISIO shade™ Super-Matte PET Surface Board

Section 06400

Architectural millwork specification information

01 General

1.1 Related sections

- A. Section 06410 – Custom cabinets
- B. Section 12320 – Manufactured wood casework
- C. Section 12350 – Specialty casework

1.2 Submittals

- A. Submit under provisions of Section 01300
- B. Manufacturer's data sheets on product being used
 - 1. RAUVISIO shade technical information

1.3 Quality assurance and testing

- A. Installer qualifications: Cabinet/millwork professional
- B. Testing information can be found in the RAUVISIO shade technical information

1.4 Storage and handling

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Store in dry, protected, well-ventilated area and protect from damage.
- C. Store away from dust and debris.

1.5 Safety

- A. To ensure safety and proper use of the product, follow manufacturer's safety guidelines found in the RAUVISIO shade technical information.

1.6 Project conditions

- A. Maintain environmental conditional (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimal results. Do not install products under environmental conditions outside manufacturer's absolute limits.

1.7 Warranty

- A. Provide manufacturer's limited warranty

02 Products

2.1 Manufacturers

- A. Acceptable manufacturer: REHAU Industries LLC
 - 1501 Edwards Ferry Road NE Leesburg, VA 20176
 - (703) 777-5255 | info@rehau.com | www.rehau.com/us-en
- B. Substitutions: Not permitted.
- C. Requests for substitutions will be considered in accordance with provisions of Section 01600.

2.2 RAUVISIO shade Super-Matte PET Surface Board by REHAU Industries

- A. Approved product: REHAU's RAUVISIO shade Super-Matte PET Surface Board
 - 1. RAUVISIO ferro Metallic PET Surface Board fabricated by approved fabricator
 - a. 19.8 mm RAUVISIO shade Super-Matte PET Surface Board Chalk 2001
 - b. 19.8 mm RAUVISIO shade Super-Matte PET Surface Board Clay 3300
 - c. 19.8 mm RAUVISIO shade Super-Matte PET Surface Board Pewter 3001
 - d. 19.8 mm RAUVISIO shade Super-Matte PET Surface Board Canvas 3103
 - e. 19.8 mm RAUVISIO shade Super-Matte PET Surface Board Indigo 6150
 - f. 19.8 mm RAUVISIO shade Super-Matte PET Surface Board Charcoal 5000

2.3 RAUVISIO shade matching edgebanding by REHAU Industries

A. Approved product: REHAU LaserEdge™ Elegant Matte edgebanding

1. RAUVISIO shade Elegant Matte REHAU LaserEdge edgebanding, fabricated by approved manufacturer

- a. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Chalk C100378
- b. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Clay C600968
- c. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Pewter C400823
- d. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Canvas C200853
- e. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Indigo C600969
- f. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Charcoal C600925

03 Execution

3.1 Examination

A. Do not begin installation until all products are properly prepared and hardware installed.

3.2 Installation

A. Install in accordance to manufacturer's instructions found in the RAUVISIO shade technical information using screw on European concealed hinges.

3.3 Protection

- A. Protect installed product until completion of project.
- B. Remove peel coat after installation of product.

04 Links

4.1 RAUVISIO shade technical information

www.rehau.com/downloads/1206258/rauvio-shade-technical-guide.pdf

4.2 RAUVISIO shade board limited warranty

www.rehau.com/downloads/1532224/rauvio-panel-and-finished-component-limited-warranty.pdf

4.3 RAUVISIO shade edgeband limited warranty

www.rehau.com/downloads/734738/standard-purchase-terms-and-conditions.pdf

4.4 RAUVISIO shade

na.rehau.com/shade

RAUVISIO shade™ Super-Matte PET Surface Cabinet Doors

Section 06400

Architectural millwork specification information

01 General

1.1 Related sections

- A. Section 06410 – Custom cabinets
- B. Section 12320 – Manufactured wood casework
- C. Section 12350 – Specialty casework

1.2 Submittals

- A. Submit under provisions of Section 01300
- B. Manufacturer's data sheets on product being used
 - 1. RAUVISIO shade technical information

1.3 Quality assurance and testing

- A. Installer qualifications: Cabinet/millwork professional
- B. Testing information can be found in the RAUVISIO shade technical information

1.4 Storage and handling

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Store in dry, protected, well-ventilated area and protect from damage.
- C. Store away from dust and debris.

1.5 Safety

- A. To ensure safety and proper use of the product, follow manufacturer's safety guidelines found in the RAUVISIO shade technical information.

1.6 Project conditions

- A. Maintain environmental conditional (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimal results. Do not install products under environmental conditions outside manufacturer's absolute limits.

1.7 Warranty

- A. Provide manufacturer's limited warranty

02 Products

2.1 Manufacturers

- A. Acceptable manufacturer: REHAU Industries LLC
 - 1501 Edwards Ferry Road NE Leesburg, VA 20176
 - (703) 777-5255 | info@rehau.com | www.rehau.com/us-en
- B. Substitutions: Not permitted.
- C. Requests for substitutions will be considered in accordance with provisions of Section 01600.

2.2 RAUVISIO shade Super-Matte PET Surface Cabinet Doors by REHAU Industries

- A. Approved product: REHAU's RAUVISIO shade Super-Matte PET Surface Cabinet Doors
 - 1. RAUVISIO ferro Metallic PET Surface Cabinet Doors fabricated by approved fabricator
 - a. 19.8 mm RAUVISIO shade Super-Matte PET Surface Board Chalk 2001
 - b. 19.8 mm RAUVISIO shade Super-Matte PET Surface Board Clay 3300
 - c. 19.8 mm RAUVISIO shade Super-Matte PET Surface Board Pewter 3001
 - d. 19.8 mm RAUVISIO shade Super-Matte PET Surface Board Canvas 3103
 - e. 19.8 mm RAUVISIO shade Super-Matte PET Surface Board Indigo 6150
 - f. 19.8 mm RAUVISIO shade Super-Matte PET Surface Board Charcoal 5000

03 Execution

3.1 Examination

A. Do not begin installation until all products are properly prepared and hardware installed.

3.2 Installation

A. Install in accordance to manufacturer's instructions found in the RAUVISIO shade technical information using screw on European concealed hinges.

3.3 Protection

A. Protect installed product until completion of project.

B. Remove peel coat after installation of product.

04 Links

4.1 RAUVISIO shade technical information

www.rehau.com/downloads/1206258/rauvio-shade-technical-guide.pdf

4.2 RAUVISIO shade cabinet door limited warranty

www.rehau.com/downloads/1532224/rauvio-panel-and-finished-component-limited-warranty.pdf

4.3 RAUVISIO shade

na.rehau.com/shade

Customer Service Contacts

Hours Monday to Friday, 8 am to 4:30 pm EST

Email orders.us@rehau.com

www.na.rehau.com/cabinetdoors

United States

Phone (888) 734-2810 Fax (616) 285-7622

Canada

Phone (888) 905-0345 Fax (514) 905-0490

For updates to publication, visit na.rehau.com/resourcecenter

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained therefrom. Before using, the user will determine suitability of the information for user's intended use and shall assume all risk and liability in connection therewith.

© 2025 REHAU

100. en 03.2025