

Engineering progress
Enhancing lives

**Entice the senses
with RAUVISIO
ingrain.**

na.rehau.com/ingrain



REHAU

RAUVISIO ingrain™

complete program guide

Contents

General information

- 4** Curated color collection
- 6** Finished door & component options
- 7** Material options
- 8** Material properties & performance
- 10** Technical guide
- 19** Warranty

Specification sheets

- 25** CPL Laminate spec sheet
- 27** Board spec sheet
- 29** Cabinet door spec sheet

RAUVISIO ingrain wood fiber laminate surface combines natural wood fibers with synchronized etching for a luxurious veneer aesthetic. Its distinctive combination of fibers and dimensional gloss channels light and contrast in such high definition that it demands a second, even third glance. Step into the grain with one of our immersive patterns to deliver an atmosphere of eco-conscience luxury to your next designed space.

This manual contains safety-related information that requires your special attention. It is indicated with the safety alert symbol and the signal words described below:

 DANGER	Indicates a hazardous situation which, if not avoided, will result in death or serious injury.
 WARNING	Indicates a hazardous situation which, if not avoided, could result in death or serious injury.
 CAUTION	Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.
NOTICE	Indicates a risk of property damage, including damage to the individual components.

This document is protected by copyright. The rights conferred therein, in particular those relating to the translation, reprinting, extraction of pictures, electronic transmissions, reproduction by photo-mechanical or similar means and storage on data processing equipment, remain reserved.

All dimensions and weights are approximate. Subject to errors and modifications.

Seek out pattern.


We have been mesmerized by patterns, colors and textures since our most primitive days. Our mind is hardwired to seek patterns so that we can make sense of the world by creating categories for things: Harmful or helpful? Dangerous or safe? Appealing or unappealing? Once we have categorized something and found it to be more than agreeable, we want to make it ours and share it with others.

While many have tried to replicate wood, **RAUVISIO ingrain** delivers, exceptionally. Harness the power of this precise etching technology and its capacity to span a wide range of applications to create captivating natural spaces. From door to wall to ceiling, **RAUVISIO ingrain** captures the light, contrast and grain pattern in such high definition that it demands a second, even third glance. Take your peacocking to the next level: Pick one of our 15 hyper-realistic colors in this exclusive finish.



Heirloom Oak

1318




Windswept Pine

1824




Steel Oak

1349




Acacia Oak

1343




Roasted Oak

1345



Seaside Pine

1823



Milestone Maple

1502



Nomad Oak

1338




Honeycomb Oak

1348




Sunlit Pine

1827




Cognac Pine

1826




Whispering Walnut

1125



Dawning Ash

1509



Bourbon Teak

1831



Charred Ebony

1960



Finished door & component options

Profile specifications	
Appearance	Wood veneer
Door style	Slab and shaker
Design style	Modern, contemporary
Shaker stiles and rails	3 in (76.2 mm), custom widths also available
Construction	PUR laminated face and back, REHAU LaserEdge
Face material	Wood fiber laminate, multiple colors
Back material	Wood fiber laminate, matching color
Edgeband	Duo-gloss REHAU LaserEdge, matching color
Core	Particle board
Grain direction	Choose vertical or horizontal
Board thickness	3/4 in (19.5 mm)


Cabinet door size parameters	
Minimum slab	3 x 5 in (76.2 x 127 mm)
Maximum slab	48 x 119 in (1220 x 3022.6 mm)
Minimum shaker	8-7/8 in W x 11 in H (225.4 mm W x 279.4 mm H)
Maximum shaker	30 in W x 65 in H (762 mm W x 1651 mm H)

Edgebanding profile	
Top edge	1.0 mm radius
Bottom edge	1.0 mm radius
Edgeband finish	Duo-gloss, color matched


Accessory products	
PSA laminate	24 x 96 in (609.6 x 2438.4 mm)
1/4 in. thick components	Cut-to-size with raw edges
Integrated handle	1-17/64 and 5/64 in (32 and 2 mm)
Appliance end panel	1.5" thick panel (up to 4' x 9')

RAUVISIO ingrain is designed for vertical applications, however it can be used in light-duty horizontal applications. It cannot be used for worktops, countertops, in bathrooms or other humid areas.

Slab profile

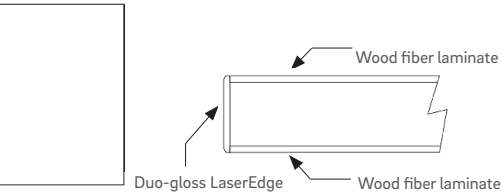

Shaker profile

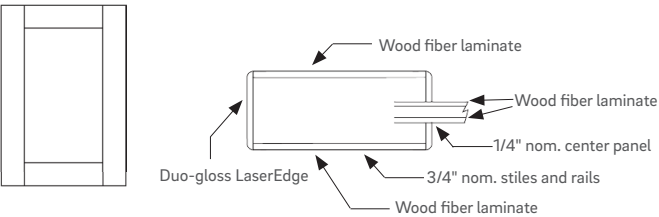

Material options

Board specifications

Construction	PUR laminated face and back
Face material	Wood fiber laminate, multiple colors
Back material	Wood fiber laminate, multiple colors
Core	Particle board
Size	49 x 121 in x 19.5 mm

Laminate specifications

Construction	Continuous Pressure Laminate (CPL)
Material	Wood fiber laminate
Size	49 x 120 in x 0.5 mm

Edgebanding options

ABS	15/16 in x 1.0 mm x 600 ft
ABS LaserEdge	15/16 in x 1.2 mm x 600 ft
ABS	43 x 1.0 mm x 100 M

Features & benefits

- High-definition print
- 3x thicker than melamine
- High-performing, sustainable surface
- Made of natural cellulose fibers
- Free of melamine resins, formaldehyde, phenol and solvents
- Double-sided finished panel or cabinet door

Cleaning and care

Clean with a cotton dish towel and mild soap if needed. Avoid abrasive cleaners, solvent-based cleaners and harsh chemicals. Do not use brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

Protective coat

There is no protective peel coat on RAUVISIO ingrain products.

na.rehau.com/ingrain

Material properties & performance

Visual characteristics

	Test standard	Requirements	Result
Lightfastness	DIN EN ISO 4892-2 Art B (behind window glass)	Assessment according to blue scale	≥ Level 6
	Assessment according to DIN EN ISO 105 A02	Assessment according to blue scale	≥ Level 4

Surface properties

Scratch-resistance	DIN 68861/T4	-	D/C result, per UNI EN 15186:2012, method B
Micro-scratch resistance	IHD-W-466 (Art. A)	-	Abrasion Resistance: D/C result, per UNI EN 15185:2011
Performance in dry heat	68861/T7/ DIN EN 12722 DIN CEN TS 16209	Stress group min: 7D Class C	C/A result, per EN 12722:2013
Performance in moist heat	68861/T8/ DIN EN 12721	Stress group min: 8B	C/B result, per EN 12721:2013

Material properties


Fire behavior	DIN 4102/1	-	B2 (normal combustibility)
Formaldehyde emissions	EN 622 and TSCA Title VI	Class E1: < 0.09 PPM TSCA: < 0.11 PPM	E1/CARBII/TSCA Title VI

Environmental

FSC Certification	-	-	FSC Controlled Wood is available ICILA-COW-002600
Phenol	EN ISO 16000-9	Phenol content in resin	Phenol free
Indoor air comfort - Ultra low VOC	RAL-GZ 430	Less than 3 mg/m ³ TVOC after 3 days, less than 0.4 mg/m ³ after 28 days	Class A+
	UNI EN ISO 16000-9:2006 + ISO 16000-6:2011	Less than 5 µg/m ³ Total Volatile Organic Compounds	Class A+

RAUVISIO ingrain wood fiber laminate surface is cellulose fibers derived from wood pulp bonded using vegetable-based adhesives, resulting in a high-performing, sustainable surface. Free of melamine resins, formaldehyde, phenol and solvents, the laminate is offered as pressure sensitive adhesive (PSA) laminates, boards and edgeband or fabricated panels and cabinet doors. The PSA laminate is extremely flexible, making it ideal for vertical design elements, including curved walls and soft 3D applications, and suitable for cabinet refacing.

Crafted in Italy, the wood-fiber paper is applied stateside to a particle board core using PUR glue and finished with REHAU LaserEdge duo-gloss technology. By combining color, gloss and embossing patterns, this next-generation edge seamlessly continues the heightened sensory experience of the wood-fiber surface. Lose yourself in the definition of **RAUVISIO ingrain**.

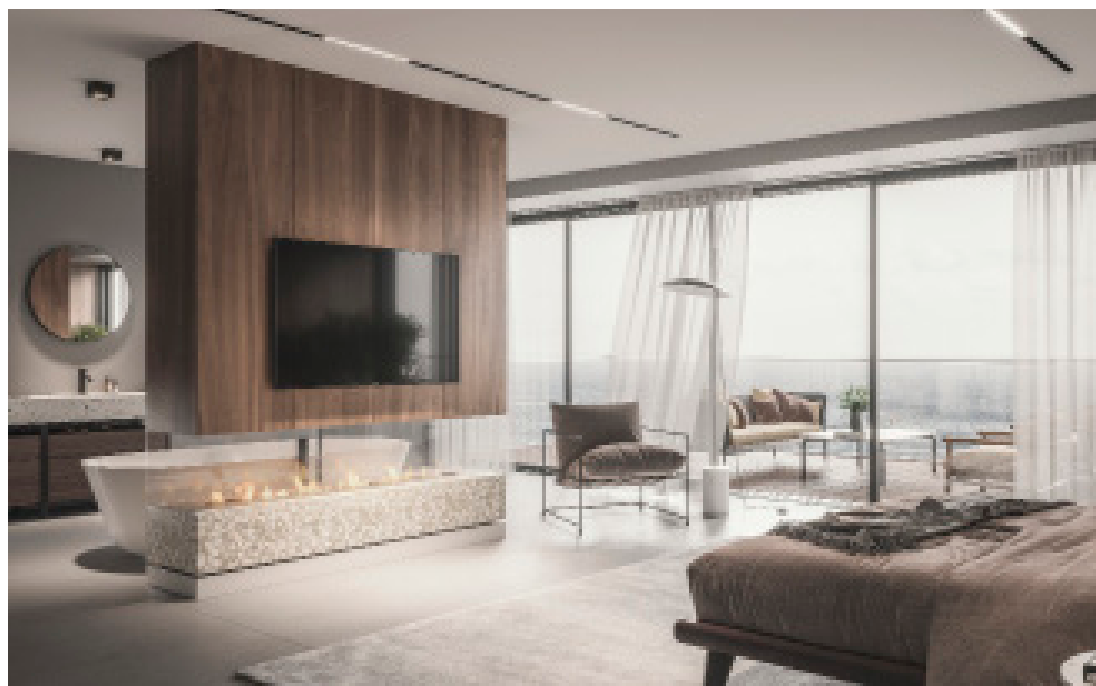

Technical guide

01 Information and safety notes

Latest version of the technical information

To ensure your safety and proper use of our products, please regularly check whether a more recent version of the technical information is available.

You can obtain the latest version of the document from your local retailer, your REHAU sales office or download it from na.rehau.com/ingrain

Proper use

RAUVISIO products may only be planned, processed and installed in accordance with this technical information. Any other use is in violation of the specifications and is therefore prohibited.

Suitability of the material

The relevant, valid technical information is to be observed for the processing/assembly and use of RAUVISIO products. Our technical information is based on empirical values and knowledge acquired up to the time of printing. The transmission of this information includes no assurances as to the properties of the products described. No explicit or implicit guarantee may be derived from it. The information does not release the user/purchaser from their obligation to assess the suitability of this material and the correct processing thereof to attain the required results in terms of objective and application.

Disclosure of information

It is essential to ensure that your customers, also including end customers, are aware of the necessity to observe the current technical information as well as instructions for the care and use for RAUVISIO products. The instructions for use and care must be provided to the end customer either by yourself or by your customer.

Note to our distribution partners and customers that resell RAUVISIO products:

Please also inform your customers about the need to observe the current technical information and make it available to your customers.

Note to the processor:

Please ensure that at least the installation guidelines and the instructions for use and care are made available to your customers and processing and installation firms.

Safety information and installation instructions

Observe the instructions on the packaging, accessories and installation instructions. Keep the installation instructions handy for easy access.

If you do not understand the safety information or the individual installation procedures or if something is unclear, please contact your REHAU sales office.

Applicable guidelines and safety equipment

Strictly observe all applicable safety and environmental regulations as well as the regulations of the trade supervisory authority and the employers' liability insurance association. Such regulations always take precedence over the information and recommendations in this technical information.



CAUTION

To reduce the risk of injury always use safety equipment such as

- Gloves
- Safety goggles
- Ear protection
- Dust mask

Adhesives and auxiliary materials

Strictly observe the safety instructions for any adhesives.



CAUTION

To reduce the risk of injury always store work equipment such as alcohol-based cleaning products and other easily flammable materials in safe and well-ventilated places.

Ventilation/extraction, production dust

Dust created by drilling, sawing, sanding or machining wood products can expose you to wood dust, a substance known to the State of California to cause cancer. Avoid inhaling wood dust or use a dust mask or other safeguards for personal protection. Appropriate protective measures should be taken when processing this material.

California residents, visit www.rehau.com/us-en/ca-prop-65 for more information.



CAUTION

To reduce the risk of injury do not inhale production dust. If you inhale production dust, get fresh air and seek medical attention if you experience any symptoms.

Protective measures and disposal

RAUVISIO ingrain is a composite made of wooden substrate and wood fiber laminate, which has ecologically sound properties. The dust that forms is not toxic. The dust concentration is to be minimized through suitable protective measures such as extraction or a dust mask.

Dust from RAUVISIO ingrain does not pose any specific risk of explosion.

Disposal code in accordance with the Waste Catalogue Ordinance:

- 170203/Construction and demolition waste consisting of wood, glass, plastic

Fire behavior

Due to its composition of wooden substrate and wood fiber laminate, RAUVISIO ingrain demonstrates favorable fire behavior and normal flammability. In case of fire, no toxic substances such as heavy metals or halogens are released. The same fire-fighting techniques can be used as for other construction materials containing wood.



WARNING

To reduce the risk of serious injury or death use the following fire extinguishing procedures.

Extinguishing fires

Suitable extinguishing agents for fighting fires

- Water spray
- Foam
- CO₂
- Extinguishing powder

A water jet is unsuitable for safety reasons.

When extinguishing fires, wear appropriate protective clothing and, if necessary, a self-contained breathing apparatus.

02 Directions for use and applications

RAUVISIO ingrain wood fiber laminate surface

RAUVISIO ingrain is a wood fiber laminate that resembles and performs like pre-finished veneer. This product can be purchased in the following forms:

- Top and bottom faced panel
- Finished component
- Laminate with pressure sensitive adhesive (PSA)

NOTICE

To reduce the risk of property damage use the following procedures regarding sawing/milling/drilling of panels.

Sawing/milling/drilling of panels

RAUVISIO ingrain panels can be processed with most approved woodworking tools. In order to enable precise processing, ensure that the tools are sharp and that ideal machine settings are used. Here, the optimum machine parameters must be established prior to series production via a sequence of sampling.

When cutting RAUVISIO ingrain panels, it is important to use a sacrificial panel below the RAUVISIO ingrain panel to ensure a clean cut edge of the decorative laminate. A thin panel will suffice. It is recommended to cut a test panel and evaluate first before cutting the entire job. The use of a sacrificial panel underneath is also recommended when drilling through the panel.

Special note about using masking tapes when cutting:

When performing a special cutting operation (such as miter cutting) that requires the use of a masking tape to achieve a clean cut, please use caution when removing the tape from the surface. Do not peel the tape starting at the cut edge as this can risk damaging the laminate surface. Instead, peel the opposite edge/corner that is closest to the center of the panel. Peel the tape back on itself flat against the surface (not upward) and at about a 45 degree angle (when looking down on the surface) towards the cut edge until the tape has been removed. Always use a clean release style masking tape. We recommend a clean release tape such as the 3M 2090 masking tape for best results. Remove tape within 2 hours of application.

Edgebanding of panels

The use of a matching REHAU edgeband material is recommended to create a uniform appearance between the RAUVISIO ingrain surface and edge. The best visual results are achieved by using REHAU LaserEdge™.

To achieve the best visual result, a clean cut edge of the laminate is necessary. Please ensure you are getting a clean cut with your edgebander's pre-mill. Some pre-mill units can cause light fraying of the cut edge, causing a visual difference to the rest of the laminate. If you are not satisfied with the quality of the cut using the pre-mill, you can turn off the pre-mill stage on the edgebander.

It is recommended to turn off some of the edgebanding fluids normally used during processing, as some of these fluids can leave a glossy sheen on the edge of the cut component. Run a test piece and evaluate before running the entire job.

Touch up marker

To achieve the highest quality visual appearance of the cut edge, some colors may benefit from the use of touch up markers to hide light fraying of the surface edge. The table below indicates which markers are recommended by color:

RAUVISIO ingrain color	Marker brand	Marker color
Acacia Oak 1343	Varathane	Walnut
Bourbon Teak 1831	Varathane	Walnut
Charred Ebony 1960	Varathane	Black
Cognac Pine 1826	Varathane	Mahogany
Dawning Ash 1509	Varathane	Gray
Heirloom Oak 1318	Varathane	Gray
Honecomb Oak 1348	Master's Touch	Pale Cream #142
Milestone Maple 1502	NA	None
Nomad Oak 1338	Varathane	Cherry
Roasted Oak 1345	Scratch Fix	Black Brown
Seaside Pine 1823	NA	None
Steel Oak 1349	Varathane	Gray
Sunlit Pine 1827	Master's Touch	Panel Cream #142
Whispering Walnut 1125	Varathane	Walnut
Windswept Pine 1824	Varathane	Gray

Apply touch up marker to edge of laminate. To remove excess marker, spray area with isopropyl alcohol and wipe immediately with a soft cloth.

Please contact REHAU Customer Service for more information on where to buy touch up markers, or for other related questions.

03 Handling

NOTICE

To reduce the risk of property damage use the following handling and transporting procedures.

Proper handling of the panels is important. The risks of being damaged is highest when transporting and handling. Carefully lift the panels. Avoid letting panels slip and or drag on one another. When moving individual panels from a pallet, two people are required to lift and move the panel, or a vacuum lift system should be used to avoid scratching the decorative surfaces.

04 Storage

NOTICE

To reduce the risk of damage use the following storage procedures.

Panels and laminates with PSA need to be stored in dry and protected environments, as prescribed by the international reference standards (EN 438). Panels and laminates with PSA must be stored in a dry environment, and ideally with a temperature of 64-72°F (18-22°C), and a 50-60% relative humidity. Panels should be stored horizontally and be fully supported along the entire length at all times during storage and transportation. Panels must be stored on a clean, dry surface, such as a raw MDF panel. Panels must be kept clean and free of dirt, dust, debris and other contaminants. The top panel should be kept covered to avoid contamination.

05 Maintenance and cleaning

NOTICE

RAUVISIO ingrain requires little maintenance. To achieve good results when removing stains, follow the indications listed below.

Ordinary maintenance

Clean the panels with a damp cotton cloth. Most stains are removed with water and an ordinary gentle household soap. With resistant stains, a more concentrated soap can be used. Always dry with a clean cotton cloth.

Slightly dirty surfaces - daily maintenance

Soak a clean cloth in water containing a household soap or detergent. Use a damp cloth to clean the surface. Wipe with a dry and clean cloth.

Dirty surfaces - cleaning thoroughly

Remove the dirt. Soak a clean cloth in water containing household soap and wring it. As you wipe the surface clean, ensure you always move the cloth in the direction of the wood grain. Wipe with a dry and clean cloth.

To be avoided

Never use abrasive or particularly aggressive products, such as steel wool, abrasive powder or other furniture polishes, because they can cause irreparable surface scratches or discolorations.

06 Technical data

For standard RAUVISIO ingrain boards and cabinet doors

Properties	Test method	Property or attribute	Unit	Results
Surface quality	EN 438-2.4	Spots, dirt and similar surface defects	mm ² /ms	≤ 1
		Fibers, hair and scratches	mm ² /m ²	≤ 10
Dimensional tolerances	EN 438-2.5	Thickness	mm	± 0.40
	EN 438-2.6	Width	mm	± 3.0
	EN 438-2.6	Length	mm	± 3.0
Resistance to scratching	EN 15186:2012	Method B: Load required to scratch	N	0.7
Tendency to retain dirt	9300:2015	Appearance	Rating	3
Light fastness (xenon arc)	EN 15187:200	Contrast	Gray scale rating	> 4
Resistance to dry heat (180°C)	EN 12722:2013	Classification	Rating	A
		Appearance	Rating	≥ 4
Resistance to wet heat (100°C)	EN 12721:1997	Classification	Rating	A
		Appearance	Rating	5
Surface resistance to cold liquids	EN 12720:2013	Classification	Rating	A
		Acetic acid (10%) at 16h	Rating	5
		Ammonia (10%) at 16h	Rating	5
		Citric acid (10%) at 16h	Rating	5
		Cleaning agent at 16h	Rating	5
		Coffee at 16h	Rating	5
		Ethanol (48%) at 6h	Rating	5
		Paraffin oil at 24h	Rating	5
		Water at 24h	Rating	5
		Perspiration basic at 1h	Rating	5
Chemical resistance	ANSI/KCMA A161.1-2012 Section 9.4	Withstands staining from vinegar, lemon, orange & grape juices, ketchup, coffee, olive oil, 100 proof alcohol, detergent solution, mustard	Pass/Fail	Pass

Reaction to fire

Properties	Test method	Property or attribute	Unit	Results
Reaction to fire	ASTM E84-20	Flame spread and smoke developed	Classification	Class A

The Reaction to Fire of RAUVISIO ingrain is related to the final composite panel where the laminate is bonded to a suitable substrate. The results may be different depending on the substrate, glue and bonding techniques. The results shown are from tests of the laminate bonded to gypsum board. Class A panels available upon request. Standard RAUVISIO ingrain boards have not been tested for flammability.

Environmental properties of surface material

Properties	Test method	Property or attribute	Unit	Results
VOC emissions	EN ISO 16000-9	Classification	Rating	A+
		Formaldehyde	mg/m ³	≤ 0.012
		Acetaldehyde	mg/m ³	≤ 0.019
		Toluene	mg/m ³	≤ 0.002
		Tetrachloroethylene	mg/m ³	≤ 0.002
		Xylene	mg/m ³	≤ 0.002
		Trimethylbenzene	mg/m ³	≤ 0.002
		TVOC	mg/m ³	≤ 0.1
Persistent organic pollutions (POPs)	Persistent organic pollutions (POPs) EU 2019/1021 Regulation	Contains substances from POPs and EU 2019/1021	Yes/No	No
Safe Drinking Water and Toxic Enforcement Act of 1986	Proposition 65	Contains substances from Prop 65	Yes/No	No
REACH	1907/2006 Art 59	Contains substances on candidate list	Yes/No	No

07

Technical data

For RAUVISIO ingrain CPL laminate

Properties	Test method	Property or attribute	Unit	Results
Surface quality	EN 438-2.4	Spots, dirt and similar surface defects	mm ² /ms	≤ 1
		Fibers, hair and scratches	mm ² /m ²	≤ 10
Dimensional tolerances	EN 438-2.5	Thickness	mm	± 0.05
	EN 438-2.6	Width	mm	± 3.0
	EN 438-2.6	Length	mm	± 5.0
Resistance to scratching	EN 15186:2012	Method B: Load required to scratch	N	0.6
Tendency to retain dirt	9300:2015	Appearance	Rating	3
Light fastness (xenon arc)	EN 15187:200	Contrast	Gray scale rating	> 4
Resistance to dry heat (180°C)	EN 12722:2013	Classification	Rating	C
		Appearance	Rating	5
Resistance to wet heat (100°C)	EN 12721:1997	Classification	Rating	A
		Appearance	Rating	5
Surface resistance to cold liquids	EN 12720:2013	Classification	Rating	A
		Acetic acid (10%) at 16h	Rating	5
		Ammonia (10%) at 16h	Rating	5
		Citric acid (10%) at 16h	Rating	5
		Cleaning agent at 16h	Rating	5
		Coffee at 16h	Rating	5
		Ethanol (48%) at 6h	Rating	5
		Paraffin oil at 24h	Rating	5
		Water at 24h	Rating	5
		Perspiration basic at 1h	Rating	5

Environmental properties of surface material

Properties	Test method	Property or attribute	Unit	Results
VOC emissions	EN ISO 16000-9	Classification	Rating	A
		Formaldehyde	mg/m ³	≤ 0.052
		Acetaldehyde	mg/m ³	≤ 0.010
		Toluene	mg/m ³	≤ 0.002
		Tetrachloroethylene	mg/m ³	≤ 0.002
		Xylene	mg/m ³	≤ 0.002
		Trimethylbenzene	mg/m ³	≤ 0.002
		TVOC	mg/m ³	≤ 0.18
Persistent organic pollutions (POPs)	Persistent organic pollutions (POPs) EU 2019/1021 Regulation	Contains substances from POPs and EU 2019/1021	Yes/No	No
Safe Drinking Water and Toxic Enforcement Act of 1986	Proposition 65	Contains substances from Prop 65	Yes/No	No
REACH	1907/2006 Art 59	Contains substances on candidate list	Yes/No	No

08 Installation guidelines

1. Fabricated components should only be transported in their original packaging.
2. Always unload packaging units sideways and from the middle.
3. Fabricated components should always be stored on the original pallet or using four-timber storage.
4. The storage of the fabricated components must not be stored outside or in damp environments.
5. Fabricated components should always be stored appropriately at the installation location and not exposed to strong UV light sources.
6. Acclimate fabricated components prior to installation for at least 24 hours at room temperature (min. 65°F / 18°C). At delivery temperatures below 32°F / 0°C, acclimate the elements for at least 48 hours on all sides.
7. No objects are to be rested on raw boards and fabricated components as these could cause damage.
8. RAUVISIO ingrain is suitable for vertical applications indoors. Enquire and check with the manufacturer about special application cases if necessary.
9. All materials and components must be checked for damage or defects prior to processing/assembly.
10. Do not allow exposed edges of wooden substrates into contact with moisture prior to assembly.
11. In the case of wooden substrates all cut edges and raw board edges must be sealed so that they are watertight. The use of RAUVISIO laser edge can ensure edges are watertight.
12. All drilled holes in the wooden substrates must be sealed during assembly so that they are watertight.
13. No strong solvents, special cleaners (e.g., drain cleaners, industrial cleaners, lubricants or abrasive cleaning cloths) or strong chemical substances may be used on the surface.
14. Heavy dirt can cause scratches during cleaning, therefore always clean dirty areas carefully with a cotton cloth.
15. Do not stand on unassembled or assembled RAUVISIO ingrain components.
16. RAUVISIO ingrain fabricated panels are suitable for indoor assembly for indoor vertical applications only.

RAUVISIO

Panel and finished component limited warranty

10-year limited warranty

REHAU Industries LLC

On the terms set forth in this Limited Warranty, REHAU Industries LLC ("REHAU") warrants to the Authorized Claimant that the Covered Products will be free from Covered Defects during the Warranty Period.

Adjusted Warranty Payment: For the first two years of the Warranty Period, coverage includes 100% of the purchase price paid by the Original Purchaser for the defective Covered Products. For the remaining time of the Warranty Period, the Adjusted Warranty Payment shall be equal to such original purchase price reduced by 10% for each year after the end of year two of the Warranty Period.

Authorized Claimant: The Original Purchaser or the Original Property Owner; shall not include a subsequent purchaser of the real property.

Claims Procedure: All claims under this warranty must be submitted by the Authorized Claimant, in writing, promptly following discovery and must further submit proof of date of purchase. REHAU may require damaged product to be returned prior to judgment of claim. REHAU upon receipt of the above, within a reasonable time frame, will inspect the Covered Products.

For RAUVISIO panels:

"Covered Defects" are (i) a lack of flatness greater than 1.5 MM per 1 FT in any direction, (ii) a color change (of solid color surfaces only) from the original color supplied beyond a Delta E of 4.0, or (iii) delamination of the decorative surface to the wooden substrate. Covered Defects do not include defects and damages due to: (a) fabrication of Covered Products, (b) installation or altering of Covered Products, (c) ordinary wear and tear, (d) any failure of Original Purchaser, Property Owner, or any third party to comply with any recommendations of REHAU as to the fabrication, transportation, use or storage of Covered Products, and (e) accidents, misuse, abuse, chemicals, excessive temperature, water damage, impact of foreign objects, or any other causes or occurrences beyond REHAU's control.

For RAUVISIO finished components:

"Covered Defects" are (i) a lack of flatness greater than 1.5 MM per 1 FT in any direction, (ii) a color change (of solid color surfaces only) from the original color supplied beyond a Delta E of 4.0, or (iii) delamination of the decorative surface or edgebanding. Covered Defects do not include defects and damages due to: (a) fabrication of Covered Products, (b) installation or altering of Covered Products, (c) ordinary wear and tear, (d) any failure of Original Purchaser, Property Owner, or any third party to comply with any recommendations of REHAU as to the fabrication, transportation, use or storage of Covered Products, and (e) accidents, misuse, abuse, chemicals, excessive temperature, water damage, impact of foreign objects, or any other causes or occurrences beyond REHAU's control.

"Covered Products" are laminates, panels, or finished components manufactured by REHAU for use in kitchen cabinet doors or other finished components in accordance with the recommendations and specifications of REHAU. These "Covered Products" are for indoor use only.


"Original Purchaser" is an individual or company that directly purchases Covered Products from REHAU.

"Original Property Owner" is the individual (or if more than one, individuals) or company that owns the real property at the time of installation of the Covered Products.

"Remedy" If REHAU determines that a claim is valid in accordance with the terms of this warranty, REHAU will at its option, either pay to the Authorized Claimant the Adjusted Warranty Payment for said defective Covered Product, or repair the defective Covered Product, or replace the defective Covered Product by shipping replacement finished products. If the defective Covered Product is no longer in production or for any reason is no longer available, REHAU will substitute, at its discretion, similar finished panels as a replacement. The Warranty Period for replaced defective Covered Products will continue to be covered under the original Warranty Period.

"Warranty Period" is ten years from the date of purchase of the Covered Products by the Original Purchaser.

THE WARRANTY GIVEN IN THIS DOCUMENT IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED ON THE PART OF REHAU. REHAU DISCLAIMS ANY WARRANTY, EXPRESS OR IMPLIED, OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT WILL REHAU BE LIABLE FOR INDIRECT, CONSEQUENTIAL OR INCIDENTAL DAMAGES, INCLUDING, BUT NOT LIMITED TO, COSTS INCURRED IN THE FABRICATION OF THE REPLACEMENT PRODUCTS, INSTALLATION OF THE FINISHED PRODUCTS INTO THE STRUCTURE OR LOSS OF PROFIT, REVENUE OR GOODWILL WHETHER ARISING FROM NEGLIGENCE, TORT, CONTRACT, STRICT LIABILITY OR OTHERWISE. EXCEPT FOR THE EXPRESS LIABILITY SET FORTH ABOVE, REHAU DOES NOT ASSUME ANY FURTHER OBLIGATIONS OR LIABILITY. Some states or provinces may not allow limitations on implied warranties, and some states may not allow the exclusion or limitation of incidental or consequential damages, so these limitations or exclusions may not apply to you. These warranties give you specific legal rights, and you may also have other rights which vary from state to state or province to province.

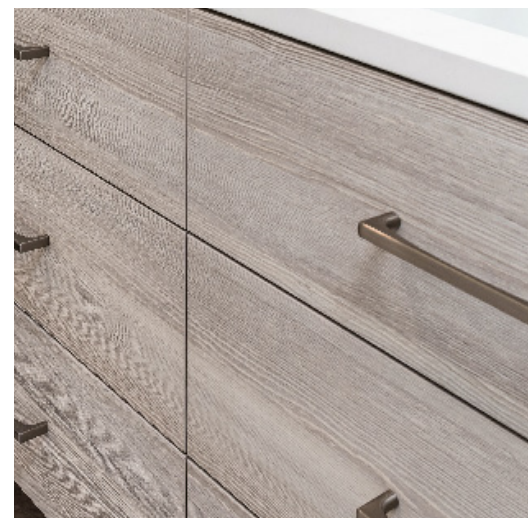

RAUVISIO ingrain™ Wood Fiber Laminate Surface CPL Laminate

Section 06400

Architectural millwork specification information

01 General

1.1 Related sections

- A. Section 06410 – Custom cabinets
- B. Section 12320 – Manufactured wood casework
- C. Section 12350 – Specialty casework

1.2 Submittals

- A. Submit under provisions of Section 01300
- B. Manufacturer's data sheets on product being used
 - 1. RAUVISIO ingrain technical information

1.3 Quality assurance and testing

- A. Installer qualifications: Cabinet/millwork professional
- B. Testing information can be found in the RAUVISIO ingrain technical information

1.4 Storage and handling

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Store in dry, protected, well-ventilated area and protect from damage.
- C. Store away from dust and debris.

1.5 Safety

- A. To ensure safety and proper use of the product, follow manufacturer's safety guidelines found in the RAUVISIO ingrain technical information.

1.6 Project conditions

- A. Maintain environmental conditional (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimal results. Do not install products under environmental conditions outside manufacturer's absolute limits.

1.7 Warranty

- A. Provide manufacturer's limited warranty

02 Products

2.1 Manufacturers

- A. Acceptable manufacturer: REHAU Industries LLC
 - 1501 Edwards Ferry Road NE Leesburg, VA 20176
 - (703) 777-5255 | info@rehau.com | www.rehau.com/us-en
- B. Substitutions: Not permitted.
- C. Requests for substitutions will be considered in accordance with provisions of Section 01600.

2.2 RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate by REHAU Industries

- A. Approved product: REHAU's RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate
 - 1. RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate fabricated by approved fabricator
 - a. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Heirloom Oak 1318
 - b. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Windswept Pine 1824
 - c. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Steel Oak 1349
 - d. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Acacia Oak 1343
 - e. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Roasted Oak 1345
 - f. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Seaside Pine 1823
 - g. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Sunlit Pine 1827
 - h. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Honeycomb Oak 1348

- i. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Milestone Maple 1502
- j. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Nomad Oak 1338
- k. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Dawning Ash 1509
- l. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Bourbon Teak 1831
- m. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Cognac Pine 1826
- n. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Whispering Walnut 1125
- o. 0.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface CPL Laminate Charred Ebony 1960

2.3 RAUVISIO ingrain matching edgebanding by REHAU Industries

A. Approved product: REHAU LaserEdge™ edgebanding

1. RAUVISIO ingrain REHAU LaserEdge Duo-gloss edgebanding, fabricated by approved manufacturer

- a. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Heirloom Oak CP41525
- b. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Windswept Pine CP41524
- c. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Steel Oak CP60614
- d. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Acacia Oak CP41530
- e. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Roasted Oak CP41494
- f. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Seaside Pine CP60626
- g. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Sunlit Pine CP21125
- h. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Honeycomb Oak CP21142
- i. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Milestone Maple CP41531
- j. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Nomad Oak CP41526
- k. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Dawning Ash CP60627
- l. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Bourbon Teak CP41527
- m. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Cognac Pine CP41529
- n. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Whispering Walnut CP41528
- o. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Charred Ebony CP60628

03 Execution

3.1 Examination

A. Do not begin installation until all products are properly prepared and hardware installed.

3.2 Installation

A. Install in accordance to manufacturer's instructions found in the RAUVISIO ingrain technical information using screw on European concealed hinges.

3.3 Protection

- A. Protect installed product until completion of project.
- B. Remove peel coat after installation of product.

04 Links

4.1 RAUVISIO ingrain technical information

www.rehau.com/downloads/1193884/rauvio-ingrain-technical-information.pdf

4.2 RAUVISIO ingrain CPL laminate limited warranty

www.rehau.com/downloads/1532224/rauvio-panel-and-finished-component-limited-warranty.pdf

4.3 RAUVISIO ingrain edgeband limited warranty

www.rehau.com/downloads/734738/standard-purchase-terms-and-conditions.pdf

4.4 RAUVISIO ingrain

na.rehau.com/ingrain

RAUVISIO ingrain™ Wood Fiber Laminate Surface Board

Section 06400

Architectural millwork specification information

01 General

1.1 Related sections

- A. Section 06410 – Custom cabinets
- B. Section 12320 – Manufactured wood casework
- C. Section 12350 – Specialty casework

1.2 Submittals

- A. Submit under provisions of Section 01300
- B. Manufacturer's data sheets on product being used
 - 1. RAUVISIO ingrain technical information

1.3 Quality assurance and testing

- A. Installer qualifications: Cabinet/millwork professional
- B. Testing information can be found in the RAUVISIO ingrain technical information

1.4 Storage and handling

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Store in dry, protected, well-ventilated area and protect from damage.
- C. Store away from dust and debris.

1.5 Safety

- A. To ensure safety and proper use of the product, follow manufacturer's safety guidelines found in the RAUVISIO ingrain technical information.

1.6 Project conditions

- A. Maintain environmental conditional (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimal results. Do not install products under environmental conditions outside manufacturer's absolute limits.

1.7 Warranty

- A. Provide manufacturer's limited warranty

02 Products

2.1 Manufacturers

- A. Acceptable manufacturer: REHAU Industries LLC
 - 1501 Edwards Ferry Road NE Leesburg, VA 20176
 - (703) 777-5255 | info@rehau.com | www.rehau.com/us-en
- B. Substitutions: Not permitted.
- C. Requests for substitutions will be considered in accordance with provisions of Section 01600.

2.2 RAUVISIO ingrain Wood Fiber Laminate Surface Board by REHAU Industries

- A. Approved product: REHAU's RAUVISIO ingrain Wood Fiber Laminate Surface Board
 - 1. RAUVISIO ingrain Wood Fiber Laminate Surface Board fabricated by approved fabricator
 - a. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Heirloom Oak 1318
 - b. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Windswept Pine 1824
 - c. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Steel Oak 1349
 - d. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Acacia Oak 1343
 - e. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Roasted Oak 1345
 - f. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Seaside Pine 1823
 - g. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Sunlit Pine 1827
 - h. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Honeycomb Oak 1348

- i. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Milestone Maple 1502
- j. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Nomad Oak 1338
- k. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Dawning Ash 1509
- l. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Bourbon Teak 1831
- m. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Cognac Pine 1826
- n. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Whispering Walnut 1125
- o. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Board Charred Ebony 1960

2.3 RAUVISIO ingrain matching edgebanding by REHAU Industries

A. Approved product: REHAU LaserEdge™ edgebanding

1. RAUVISIO ingrain REHAU LaserEdge Duo-gloss edgebanding, fabricated by approved manufacturer

- a. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Heirloom Oak CP41525
- b. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Windswept Pine CP41524
- c. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Steel Oak CP60614
- d. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Acacia Oak CP41530
- e. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Roasted Oak CP41494
- f. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Seaside Pine CP60626
- g. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Sunlit Pine CP21125
- h. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Honeycomb Oak CP21142
- i. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Milestone Maple CP41531
- j. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Nomad Oak CP41526
- k. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Dawning Ash CP60627
- l. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Bourbon Teak CP41527
- m. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Cognac Pine CP41529
- n. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Whispering Walnut CP41528
- o. 15/16" x 1.2 mm REHAU LaserEdge Duo-gloss Charred Ebony CP60628

03 Execution

3.1 Examination

A. Do not begin installation until all products are properly prepared and hardware installed.

3.2 Installation

A. Install in accordance to manufacturer's instructions found in the RAUVISIO ingrain technical information using screw on European concealed hinges.

3.3 Protection

- A. Protect installed product until completion of project.
- B. Remove peel coat after installation of product.

04 Links

4.1 RAUVISIO ingrain technical information

www.rehau.com/downloads/1193884/rauvio-ingrain-technical-information.pdf

4.2 RAUVISIO ingrain board limited warranty

www.rehau.com/downloads/1532224/rauvio-panel-and-finished-component-limited-warranty.pdf

4.3 RAUVISIO ingrain edgeband limited warranty

www.rehau.com/downloads/734738/standard-purchase-terms-and-conditions.pdf

4.4 RAUVISIO ingrain

na.rehau.com/ingrain

RAUVISIO ingrain™ Wood Fiber Laminate Surface Cabinet Doors

Section 06400

Architectural millwork specification information

01 General

1.1 Related sections

- A. Section 06410 – Custom cabinets
- B. Section 12320 – Manufactured wood casework
- C. Section 12350 – Specialty casework

1.2 Submittals

- A. Submit under provisions of Section 01300
- B. Manufacturer's data sheets on product being used
 - 1. RAUVISIO ingrain technical information

1.3 Quality assurance and testing

- A. Installer qualifications: Cabinet/millwork professional
- B. Testing information can be found in the RAUVISIO ingrain technical information

1.4 Storage and handling

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Store in dry, protected, well-ventilated area and protect from damage.
- C. Store away from dust and debris.

1.5 Safety

- A. To ensure safety and proper use of the product, follow manufacturer's safety guidelines found in the RAUVISIO ingrain technical information.

1.6 Project conditions

- A. Maintain environmental conditional (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimal results. Do not install products under environmental conditions outside manufacturer's absolute limits.

1.7 Warranty

- A. Provide manufacturer's limited warranty

02 Products

2.1 Manufacturers

- A. Acceptable Manufacturer: REHAU Industries LLC
 - 1501 Edwards Ferry Road NE Leesburg, VA 20176
 - (703) 777-5255 | info@rehau.com | www.rehau.com/us-en
- B. Substitutions: Not permitted.
- C. Requests for substitutions will be considered in accordance with provisions of Section 01600.

2.2 RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors by REHAU Industries

- A. Approved product: REHAU's RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors
 - 1. RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors fabricated by approved fabricator
 - a. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Heirloom Oak 1318
 - b. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Windswept Pine 1824
 - c. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Steel Oak 1349
 - d. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Acacia Oak 1343
 - e. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Roasted Oak 1345
 - f. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Seaside Pine 1823
 - g. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Sunlit Pine 1827
 - h. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Honeycomb Oak 1348

- i. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Milestone Maple 1502
- j. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Nomad Oak 1338
- k. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Dawning Ash 1509
- l. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Bourbon Teak 1831
- m. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Cognac Pine 1826
- n. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Whispering Walnut 1125
- o. 19.5 mm RAUVISIO ingrain Wood Fiber Laminate Surface Cabinet Doors Charred Ebony 1960

03 Execution

3.1 Examination

A. Do not begin installation until all products are properly prepared and hardware installed.

3.2 Installation

A. Install in accordance to manufacturer's instructions found in the RAUVISIO ingrain technical information using screw on European concealed hinges.

3.3 Protection

- A. Protect installed product until completion of project.
- B. Remove peel coat after installation of product.

04 Links

4.1 RAUVISIO ingrain technical information

www.rehau.com/downloads/1193884/rauvio-ingrain-technical-information.pdf

4.2 RAUVISIO ingrain cabinet door limited warranty

www.rehau.com/downloads/1532224/rauvio-panel-and-finished-component-limited-warranty.pdf

4.3 RAUVISIO ingrain

na.rehau.com/ingrain

Customer Service Contacts

Hours Monday to Friday, 8 am to 4:30 pm EST

Email orders.us@rehau.com

www.na.rehau.com/cabinetdoors

United States

Phone (888) 734-2810 Fax (616) 285-7622

Canada

Phone (888) 905-0345 Fax (514) 905-0490

For updates to publication, visit na.rehau.com/resourcecenter

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained therefrom. Before using, the user will determine suitability of the information for user's intended use and shall assume all risk and liability in connection therewith.

© 2025 REHAU

100. en 03.2025