



Engineering progress
Enhancing lives

**Lay a refined
foundation with
RAUVISIO noir.**

na.rehau.com/noir



RAUVISIO noir™

complete program guide

Contents

General information

- 4** Curated color collection
- 6** Finished door & component options
- 7** Material options
- 8** Material properties & performance
- 10** Cleaning and care
- 11** Thermal healing
- 12** Technical guide
- 18** Laminate data sheet
- 20** Warranty

Specification sheets

- 22** Laminate spec sheet
- 24** Board spec sheet
- 26** Cabinet door spec sheet
- 28** Floating shelves spec sheet

RAUVISIO noir monotonic matte surface is irresistibly lush and leaves nothing to chance by obscuring fingerprints and scratches. Linger with the visual and tactile sensations of seamless matte from every angle.

This manual contains safety-related information that requires your special attention. It is indicated with the safety alert symbol and the signal words described below:


 DANGER	Indicates a hazardous situation which, if not avoided, will result in death or serious injury.
 WARNING	Indicates a hazardous situation which, if not avoided, could result in death or serious injury.
 CAUTION	Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.
NOTICE	Indicates a risk of property damage, including damage to the individual components.

This document is protected by copyright. The rights conferred therein, in particular those relating to the translation, reprinting, extraction of pictures, electronic transmissions, reproduction by photo-mechanical or similar means and storage on data processing equipment, remain reserved.

All dimensions and weights are approximate. Subject to errors and modifications.


Colors that suit all your needs.

Inspired by the mystique of the cinematic film genre, **RAUVISIO noir** transports your imagination and senses to worlds of the past with its rich low-key colors. Take a stroll down a gaslit boardwalk, embrace the ambiance of a candlelit dinner, merge minimalism with classic panache to provoke jealous gazes. Choose the line designers identify as the embodiment of elegance: **RAUVISIO noir**.




Maltese Mist

154704




Casa Blanca

154705




Capital Starlit

154706




High Low

154707




After Dark

154708




Silver Lake

154709




Smoke Stack

154710



Gaslit Alley

154712




Trench Coat

154711




Midnight Dash

154713




Boxcar Blonde

154714




Olive Detour

154715




Sierra Social

155000




Gimlet Haze

155064




Platinum Sands

155001



Taupe Farewell

155063



Decoy Dusk

155065



Finished door & component options

Profile specifications

Appearance	Super-matte
Door style	Slab, siena and shaker
Design style	Modern, contemporary
Construction	PVA laminated face and back, REHAU LaserEdge
Shaker stiles and rails	3 in (76.2 mm), custom widths also available
Siena stiles	3 in (76.2 mm)
Face material	Super-matte monotonic laminate, multiple colors
Back material	Super-matte monotonic laminate, matching colors
Edgeband	REHAU LaserEdge, matching color
Core	Particle board
Board thickness	3/4 in (19.5 mm)

Cabinet door size parameters

Minimum slab	3 x 5 in (76.2 x 127 mm)
Maximum slab	50 x 119 in (1270 x 3022.6 mm)
Minimum shaker	8-7/8 in W x 11 in H (225.4 mm W x 279.4 mm H)
Maximum shaker	30 in W x 65 in H (762 mm W x 1651 mm H)
Minimum siena	11 in W x 6 in H (152.4 mm W x 279.4 mm H)
Maximum siena	50 in W x 60 in H (1270 mm W x 1524 mm H)


Edgebanding profile

Top edge	1.0 mm radius
Bottom edge	1.0 mm radius
Edgeband finish	Elegant matte, color matched


Accessory products

1/4 in. thick components	Cut-to-size with raw edges
Integrated handle	1-17/64 and 5/64 in (32 and 2 mm)
Floating shelves	22 to 96 in (558.8 to 2438.4 mm) wide



Siena profile



Slab profile

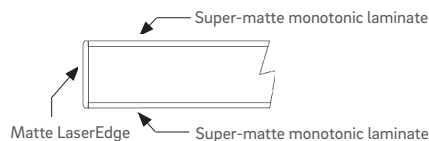

Shaker profile

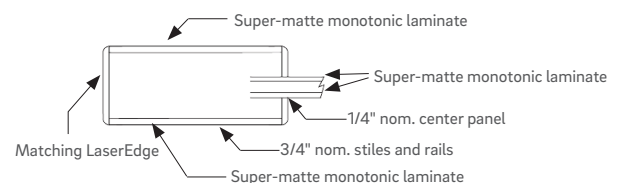

Material options

Board specifications

Construction	PVA laminated face and back
Face material	Super-matte monotonic laminate, multiple colors
Back material	Super-matte monotonic laminate, matching colors
Core	Particle board
Size	51 x 120 in x 19.5 mm

Laminate specifications

Construction	Electron Beam Cured High Pressure Laminate (HPL)
Material	Super-matte monotonic laminate
Size	51 x 120 in x 0.9 mm

Edgebanding options

ABS	23 x 1.0 mm x 100 M
ABS LaserEdge	23 x 1.2 mm x 100 M
ABS	43 x 1.0 mm x 100 M

Features & benefits

- Irresistibly soft touch finish
- Deeply light-absorbent
- Seamless matte from every angle; front, back and edge
- Fingerprint, impact and scratch resistant
- Bacteria, mold and stain resistant
- Suitable for contact with food
- Independent thermal healing of microscratches
- Anti-microbial, ultra-low in VOCs and phenol-free
- Double-sided finished panel or cabinet door
- Matching floating shelves

Cleaning and care

Clean with a damp microfiber cloth and mild soap if needed. RAUVISIO noir is resistant to most chemicals and solvent-based cleaners, but harsh chemicals should be avoided. Do not use brushes or scouring pads. REHAU is not responsible for any damage done by abrasive cleaning products or procedures.

Protective coat

A protective peel coat is applied to the top and bottom surfaces. Do not expose peel coat to direct sunlight before removal. Remove promptly after installing cabinet but prior to mounting decorative hardware. To remove peel coat, use rubber fingertips or our peel coat removal tool.

na.rehau.com/noir

Material properties & performance

Visual characteristics

	Test standard	Requirements	Result
Surface gloss level	ISO 2813	85° measurement	1.5 GLE
Color	AMK-MB-009, 09/2011	No significant changes to master sample	Pass
Surface	AMK-MB-009, 09/2012	Uniform surface, no defects visible from 0.7m	Pass
Lightfastness	DIN EN ISO 4892-2 Art B (behind window glass)	Assessment according to blue scale	≥ Level 6
	Assessment according to DIN EN ISO 105 A02	Assessment according to blue scale	≥ Level 4

Surface properties

Chemical resistance	DIN 68861/T1	Matte: 1B	1B
Acids resistance	SEFA 8-PL-2016 Section 8.1	Pass	Pass
Scratch-resistance	EN 438-2.25	Appearance	≥4
Micro-scratch resistance	EN 438-2.30	Visual assessment	5
Resistance to surface wear	EN 438-2.10	Initial point	Initial point: > 200 rev Wear value: > 350 rev
Performance in dry heat	EN 438-2.16	Appearance	≥4
Performance in moist heat	68861/T8/ DIN EN 12721	Stress group min: 8B	≥4
Performance in water vapor	DIN 438-2.14	Level 5: No changes	≥4
Impact resistance large diameter ball	EN 438-2.21	Drop height Indentation diameter	≥ 800 mm ≤ 8 mm
Linear thermal coefficient of expansion	IOS 11359-2	+10C....+40C +20C....+80C	Longitudinal: < 0.55% Transverse: < 1.05%
Hygiene (Suitability for food service)	NSF/ANSI 35	-	Pass
Contact with food - overall migration	EN 13130-23	-	Pass

Material properties

Top laminate raw density	DIN EN 323	-	1.35g/cm ³
Fire behavior	DIN 4102/1	-	Standard: Class B Fire resistant: Class A
Flame spread index	ASTM E84	Class A: 0-25 Class B: 26-75 Class C: 76-250	Standard: 40 Fire resistant: 0
Smoke developed index	ASTM E84	Class A, B, C: 0-450	Standard: 40 Fire resistant: 35
Formaldehyde emissions	EN 622 and TSCA Title VI	Class E1: < 0.09 PPM TSCA: < 0.11 PPM	E1/CARBII/TSCA Title VI

Environmental

	Test standard	Requirements	Result
FSC certification	-	-	FSC Controlled Wood
Phenol content	EN ISO 16000-9	Phenol content in resin	Phenol free
Indoor air comfort - ultra low VOC	UNI EN ISO 16000-9:2006 + ISO 16000-6:2011	Less than 5 µg/m ³ Total Volatile Organic Compounds	Class A+ (meets Greenguard requirements)
Antibacterial properties - Evaluation of microorganisms	JIS Z 2801:2010	Antimicrobial activity after 24h @ 35C	> 3.6 log reduction > 99.975 % reduction
REACH	(EG) 1907/2006 (REACH) Article 33	Contains less than 0.1% of any "substances of very high concern"	Pass
RoHS	2011/65/EU (RoHS), appendix II (including amendment 2015/863/EU 31MAR2015)	Contains no restricted substances	Pass

Forged in Italy with the finest materials, **RAUVISIO noir** monotonic matte surface retains all of its elemental properties while delivering unwavering resilience and richly uninhibited elegance. The deeply light-absorbent surface independently heals micro-scratches. Ultra-low in VOCs and phenol-free, it minimizes chemicals indoors, while its antimicrobial and hydro-repellent properties make it suitable for food contact.

RAUVISIO noir is offered as laminates, boards and edgeband or fabricated panels and cabinet doors. Panels and doors are crafted of an particle board core and finished with REHAU LaserEdge for a monolithic effect that rivals a solid surface. This versatile matte is also available in the **RAUVISIO noir** compact, a 12 mm thick solid-core panel for vertical and horizontal applications. With intensely rich hues and real-world grit, this understated surface lays a refined foundation for even the most exuberant design.

Cleaning and care

RAUVISIO noir is highly chemical resistant, and is suitable as a laboratory grade surface. It is impervious to most harsh chemicals such as acids and disinfectants. It is recommended to clean the surface with soapy water using a microfiber towel or damp cloth. For difficult stains, such as ink, acetone can be used to clean the surface followed by water rinse immediately after.

Ordinary maintenance

RAUVISIO noir should be cleaned regularly but does not require any special maintenance, just a microfiber towel or damp cloth with warm water or mild soaps or detergents. Almost all normal household cleaning products or disinfectants are perfectly well tolerated. A melamine foam sponge (magic eraser) is suggested for the normal cleaning and maintenance of the surface.

Extraordinary maintenance

In case of dirt which cannot be cleaned with normal household soaps or detergents, the use of non-aggressive aromatic solvents (acetone) is suggested. Micro-scratches will heal independently or can be escalated with friction or heat. See more about thermal healing on page 11.

General precautions


Although very durable, RAUVISIO noir does require some precautions:

- Never treat with products containing abrasive substances, abrasive sponges or unsuitable products like sandpaper or steel wool
- Products with a high acid or very alkaline content should be avoided because they can stain the surface
- When using solvents, the cloth used must be perfectly clean so it will not leave marks or residue. Any streaks can be removed by rinsing with hot water and drying
- Avoid furniture polishes and wax based cleaners in general, because they tend to form a sticky layer on the dense layer where dirt can collect



Category	Stain type	Recommended cleaning
Everyday dirt	Dust, dirt, fingerprints, marks, stains, grease	Warm water with a sponge, heavier stains use soapy water
Food & drink	Syrup, fruit juice, jam, spirits, milk, tea, coffee, wine	Warm water with a sponge, heavier stains use soapy water
Cleaners & polishes	Detergents, soap, furniture and floor polish	Warm water with a sponge, heavier stains use soapy water
Liquids & fluids	Animal and vegetable fats, sauces, dry blood, dry wine and spirits, eggs	Warm soapy water with a sponge (wash blood stains afterward with disinfectant)
Organic liquid & fluids	Smoke, gelatin, vegetable and vinyl based glues, organic waste, gum	Hot water with soap or household detergent with a sponge
Cosmetics	Hair spray, wax foundations and greasy make-up, nail polish, spray lacquer	MEK, alcohol, acetone with a cotton cloth
Oils & solvents	Vegetable oil, biro and felt tip, residual solvent marks, linseed oil	MEK, alcohol, acetone with a cotton cloth
Paint & ink	Ink, marker, paint pens	MEK, alcohol, acetone with a cotton cloth
Paint	Synthetic oil paints	Denatured alcohol or Acetone with a cotton cloth
Glues	Neoprene glues, adhesives	Dish soap, or acetone with a cotton cloth
Silicone resins	Traces of silicone, residue of acrylic adhesives, silicone-based products	Wooden or plastic scraper taking care not to scratch the surface
Mineral deposits	Lime deposits	Detergents containing low percentages of citric or acetic acid (10% max)
Wax	Candle wax, paraffin wax, plaster-based waxes	MEK, alcohol, acetone with a cotton cloth

Thermal healing


RAUVISIO noir has the ability to thermal heal itself where micro-scratches will heal independently or can be escalated with friction or heat.

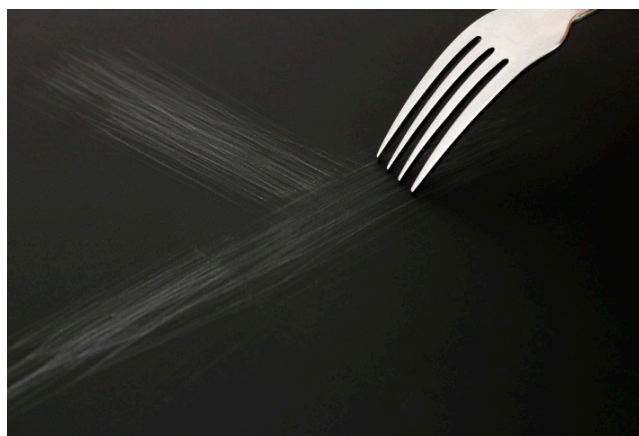

Scratches caused by metal fork

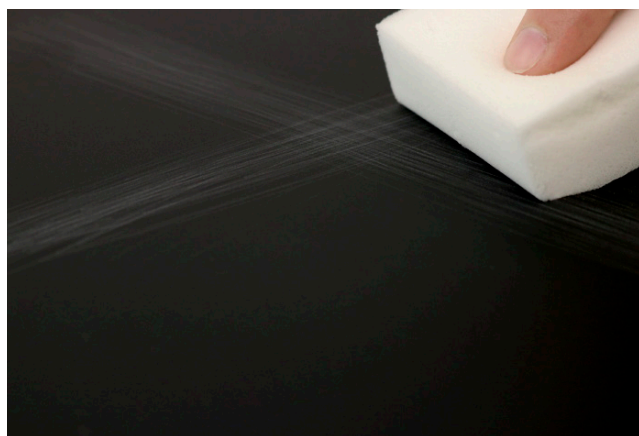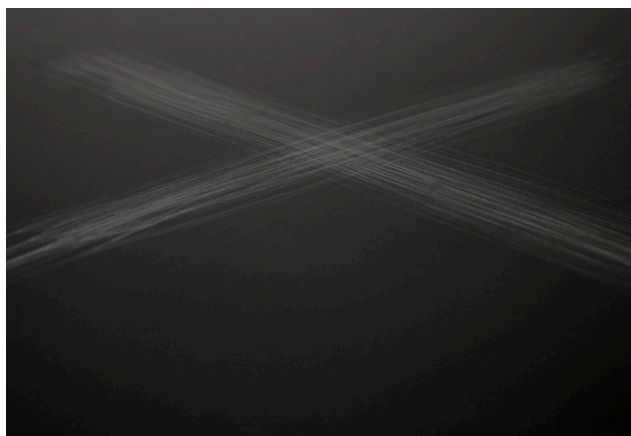

Rub a dry (can be slightly damp) magic sponge over scratches to begin thermal healing process

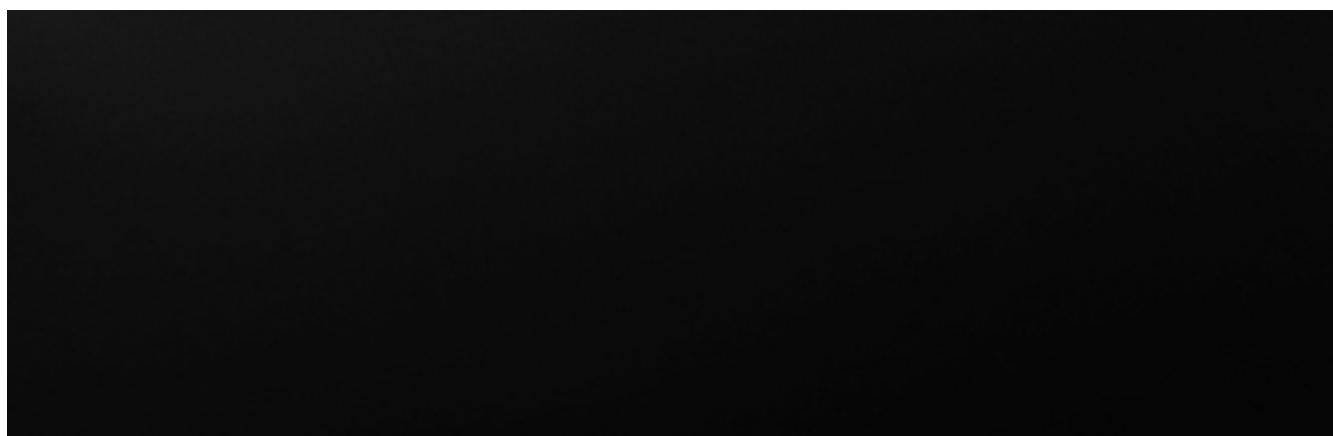

The surface should now be healed

Technical guide

01 Directions for use and applications

RAUVISIO noir monotonic matte surface

RAUVISIO noir laminates are composed of a certain number of kraft paper layers soaked in phenol-free resin. These layers are pressed with ornamental paper, at a high pressure and temperature. The ornamental paper goes through an electron beam curing process to give superior performance and the most matte surface.

RAUVISIO noir laminates comply with the following standards: DIN EN 438-2:2016
High-pressure decorative laminates (HPL) - Sheets based on thermosetting resins (usually called laminates) - Part 2: Determination of properties

NOTICE

To reduce the risk of property damage use the following procedures regarding sawing/milling/drilling of panels.

Sawing/milling/drilling of panels

RAUVISIO noir panels can be processed with standard woodworking tools. For precise processing, ensure that tools are sharp and machine settings are ideal. The use of a scoring blade is recommended. Here, the optimum machine parameters must be established prior to series production via a sequence of sampling.

Edgebanding of panels

The use of a REHAU edgeband is recommended to create a uniform appearance between the RAUVISIO noir surface and the board edge. The best visual results are achieved by using REHAU LaserEdge™. No optical joint is visible here thanks to the pigmented polymer functional layer in the edging color. The REHAU LaserEdge edgeband product range can be supplied to match the surface in ABS (acrylonitrile-butadiene-styrene) material.

For further information, please contact your REHAU sales office. The resulting component quality (e.g., adhesion of the edgeband, appearance and application properties) depends on the machine settings and the board quality used and must be checked by the fabricator. Optimum machine parameters, tool configuration and cutting

speeds are to be established individually prior to production using a series of samples; the REHAU applications engineering department will be happy to support you with this.

02 Handling

RAUVISIO noir is inherently highly scratch resistant, but proper handling is still required to properly protect corners and edges. The risk of being damaged is highest when transporting and handling.

NOTICE

To reduce the risk of property damage use the following handling and transporting procedures.

Loading and unloading

Carefully lift the laminate panels. Avoid letting the panels slip on one another.

Shipping large quantities

Use a strong pallet slightly larger than the size of the panels. You can also insert the sheets, wrapped in polyethylene film, in a wooden crate sized so they will not move during shipping.

Shipping small quantities

Smaller amounts of laminate sheets can be rolled and shipped in tubes.

Packaging

For long-distance shipping, especially in difficult conditions, the laminate sheets need to be packed in air tight packaging to protect them from dirt, such as large wooden crates, boxes or special wooden containers, or else in containers made of other very strong materials.

Laminate packs need to be protected by wrapping them up in polyethylene film. If shipping with pallets, laminate sheets need to be secured with polyester straps with plastic or cardboard corner protection.

Panel handling

Large-sized panels need to be shipped long ways, allowing them to bend without getting damaged.

Protective film

Laminates are provided with a protective film that will preserve the surface from any scratches or damage. Do not expose peel coat to direct sunlight before removal.

03 Storage

NOTICE

To reduce the risk of damage use the following storage procedures.

Laminates need to be stored in dry and protected environments, as prescribed by the international reference standards (EN 438).

Laminates must be stored in a dry environment, and ideally with a temperature of 64-72°F (18-22°C), and a 50-60% relative humidity.

Horizontal storage

The panels should be placed on horizontal shelves. The top sheet should have the decorative side facing down to avoid damage. The ideal solution is to stack the panels on shelves provided with side and top partitions.

Vertical storage on an oblique surface

If needed, it is possible to store laminate sheets on shelves vertically with 70° maximum incline. To prevent the sheets from slipping or buckling, use thick sheets as front protection.

04 Cutting

Various techniques exist for cutting laminates, using both manual or automatic cutting equipment.

NOTICE

To reduce the risk of damage use the following cutting procedures.

Manual cutting

Cut the panel on the decorative side using a point or a cutter, with the help of a stiff ruler. Apply strong and constant pressure on the point to trace out the cut line with the blade facing you. Break the laminate sheet by folding along the cut line.

Manual saw

The saw must have a thin serrated blade. Saw the panel decorative side up with the smallest possible angle (approximately 10°) to achieve a clean cut.

Portable saw

Place decorative side down. Saw along a traced line or using a stiff ruler as you slowly move the saw forward.

Laminate shears

Shears are able to cut both straight and curved lines. The sides will be trimmed after cutting.

Table saw

Use Chrome-Vanadium blades. The blades need to have a 4 mm thickness, or the vibrations will ruin the cut.

Ribbon saw

Normally, ribbon saws should not be used on laminates. This type of saw should only be used to obtain certain shapes. In this case, we recommend you use high-speed steel blades.

Milling machines

For the best cutting results, use diamond points. Chrome-Vanadium blades can be used for small projects, but the milling cutter needs to be stable with high rotation speed.

Specialized milling machine and workbench cutter

This milling machine is specially designed for cutting thin laminates. The blade moves across the laminate. Workbench cutters also provide good results.

Mobile saw

Use when cutting laminates in rolls. The circular blade will move through the laminate roll parallel to the machine movement direction.

05 Balancing

NOTICE

To reduce the risk of damage use the following balancing procedures.

The assembly of different kinds of materials causes tension, so we recommend both sides supported, ideally of the same material or at the very least the same thickness of material from the same manufacturer.

Pressing RAUVISIO noir laminates

We recommend you press RAUVISIO noir laminate panels on both the top and bottom of the core material, or at least use a product of similar quality and thickness for support and to prevent warpage. It is important that the fibers of the two laminate panels face the same direction. The two panels need to be pressed at the same time and with the same glue type.

If the core does not exceed a 15 mm thickness, both sides require the same quality and thickness. If the thickness of the support exceeds 15 mm, the thickness of the balancing sheet can be reduced. We recommend you carry out control tests to validate the thickness of the balancing sheet.

Using other materials

Under very specific circumstances, other materials, such as films or a soaked finishing layer in wood or paper, can prove useful as balancing elements. The selected materials must be as similar as possible in quality and thickness to RAUVISIO noir monotonic matte surface laminates. Always conduct tests beforehand.

06 Core options

NOTICE

To reduce the risk of damage, RAUVISIO noir 0.9 mm laminate material should be applied to a strong, uniform and smooth core material. The type of glue and related thickness, as well as the pressure exerted during assembly, will affect the final surface finish.

The dimensions of the laminates can have minimum variations depending on the temperature and environmental humidity. Take precautions if pressing in high-temperatures or humid areas. The thermal dilation factor for laminates is approximately 0.015 mm/m/°C both length and width of the sheet.

Types of support

The supports listed below are the most suitable for RAUVISIO noir. It is important to use a high-quality, flat core for best results.

1. MDF (Medium Density Fiberboard)

Best option when clean edges are required, and in curved projects.

2. Particle board

The structure of a particle board (including the shape of the particles, the smoothness of the surface, the amount of resin and the density) is what brings about the quality and the features of the surface. The tractive power of the panel surface must meet the minimum values prescribed by the regulations in force.

3. Plywood panels

This combination containing a low percentage of hardwood is suitable for some applications.

4. Alveolar materials

These materials are suitable in the event in which they represent the chief element of a compound support. They are also suitable if combined with a frame.

5. Expanded materials

Stiff boards of porous and synthetic foam (such as polystyrene, PVC and polyurethane) can be used, and offer excellent insulating properties. These also make vertical applications possible.

6. Other materials

Options such as plasterboard, steel, calcium sulfate or cement can be used. However, we recommend you conduct the necessary tests.

07 Gluing

NOTICE

To reduce the risk of damage use the following gluing procedures.

Storage

Glue must be stored in the same conditions as the other materials (laminates, balancing element, core) so it has a similar temperature for pressing.

Cleaning before gluing

Before gluing, carefully clean the surface as well as the rear of the laminate in order to remove any traces of surface dirt or processing residues. Also clean the surface of the core to avoid problems and defects after pressing. Use soft bristle brushes or air.

Gluing

- It is very important to spread the glue carefully so it is evenly distributed over the entire board
- Glue can be manually spread by a roller, a brush, or a roller system
- Opposing roller dispensers can allow for double-sided pressing on a single core

Types of glue

Various types of glues can be used during pressing and additional applications. All glue parameters need to be implemented based on the data provided by the glue supplier

1. PVC glue

Parameters	Hot press	Cold press
Amount of glue g/m ²	70 - 80	90 - 100
Temperature °C	60 - 70	20
Pressure kg/cm ²	4 - 5	4 - 5
Pressing time	40 - 60 sec	20 - 50 min

This type of glue is employed to glue laminates on wood-based core, on plasterboard, expanded cement, etc.

2. Contact glue (Neoprene)

A thermoplastic glue used with cold-pressing which provides the option of metal pressing. Must be applied on the laminate and on the core with a brush or comb. When the glue is dry to the touch, the sheets can be pressed one against the other. Do not allow the glue to dry too much before pressing, or the gluing will not stick. When pressing, exert brief but strong pressure (8 – 10 kg/cm² for at least 1 min). The amount of glue used ranges from 150 – 200 g/m².

3. Thermosetting glues

Use with hot presses (100-150°C) with pressure ranging between 5 and 10 kg/cm² for 50 – 100 sec. The amount of glue usually applied is 90 – 150 g/m². Excellent results can be found for a variety of applications. When gluing laminate on polystyrene, do not use glues with solvents that may melt the materials. Resorcin-formaldehyde is also recommended for aluminum gluing.

Support	Urea formaldehyde	Melanin formaldehyde	Resorcin formaldehyde	Polyurethane	Epoxy
Wood	X	X	X	X	X
Paper-based alveolar	X	X	X	X	X
PVC				X	X
Polystyrene				X	X
Polyurethane				X	X
Plasterboard	X				
Metal			X	X	X

08 Hole drilling

NOTICE

To reduce the risk of damage use the following hole drilling procedures.

Drilling laminate and boards

Laminate drilling can be carried out by means of a helicoidal point. The point angle must range between 60° and 80° (metal usually uses a 120° angle). A thread with a very rapid propeller and deep grooves is required to quickly remove the shavings. High speed drilling provides better results with a recommended speed of approximately 1000 tr/mn. Drilling speed must range between 20 and 50 mm/mn.

Place a piece of wood underneath the laminate to avoid splinters when the point penetrates the laminate. The screw holes must exceed the diameter of the screw or point by 1 or 2 mm to avoid cracking the laminate after assembly due to pressure.

Ensure that the holes provided for fixing purposes have a diameter of 1 or 2 mm greater than the body of the screws or nails.

Always round cut angles; protruding angles can cause the laminate to develop cracks.

Large-sized holes

It is recommended to use a saw drill or adjustable cutting tool to make holes exceeding 1/2 in.

09 Cutting

NOTICE

To reduce the risk of damage use the following cutting procedures.

Saw

The aspect of the cut edge depends on various factors, such as the regulation of the blade in height. We recommend you conduct preliminary tests before starting any manufacturing process in order to make the required adjustment.

Place the RAUVISIO noir panel with the decorative side in the opposite direction to the rotation of the blade. Make sure the sheet is well supported and secured with an adjustable height pressure tool to prevent movement and vibration. Make sure that the saw blade is aligned with the worktop and has the right depth. If you are cutting a particle board with pressed laminate on both sides, we recommend a cutting depth not exceeding the thickness

of the panel by more than 10 mm. In this way, you will prevent the laminate from splinting. You will need to allow as little room as possible between the surface of the workbench and the panel.

Should any splits be noticed on the top side of the laminate, we recommend you slightly lift the blade. On the other hand, should this situation be observed on the lower side, it is advisable to lower the blade. We recommend you perform cutting on a workbench equipped with saw and tracer.

It is also possible to cut several sheets together. In the case of panels with decoration on one side only, all sheets should be placed with their decorative sides facing upward. Alternatively, the stack of sheets should be placed on a "sacrificial panel" that has the same or superior hardness and texture as those being cut to shape.

Recommended specification for circular saws:

- Tooth pitch: 10 to 15 mm
- Cutting speed: 3,000 to 4,000 rpm
- Tip speed: 60 to 100 m/s
- Forward speed: 15 to 30 m/min

Use blades with a cutting edge in hard metal, such as a Chrome-Vanadium alloy. Ensure the blades are not too thin, since this could cause vibrations and crack the laminate.

Manual tools

Files and abrasive paper can be used. Always start from the visible side using a flat line. Work on the finish using a thin lime or abrasive paper.

Milling machine

In most cases a manual electric milling machine is employed to remove the excess laminate. During this operation, the visible side can be protected by means of another sheet of laminate placed between the milling machine and the visible side. With right-angle or slant profiles, use milling cutter heads with a straight or slant blade.

Workbench tools

For milling by means of a workbench milling machine, we recommend you use normal and vertical milling machines.

Tool wear

Wear depends on the type and shape of the tools employed, on the type of support and on the quality of cut required.

10 Maintenance and cleaning

NOTICE

RAUVISIO noir is extremely durable and requires little maintenance. To reduce the risk of damage and to achieve good results when removing stains, follow the indications listed below.

Ordinary maintenance

Clean the panels with a damp cloth. Most stains are removed with water and an ordinary gentle household soap. With resistant stains, a more concentrated soap can be used. Always dry with a clean cloth.

Slightly dirty surfaces - daily maintenance

Soak a clean cloth in water containing a household soap or detergent. Use a damp cloth to clean the surface. Wipe with a clean, dry cloth.

Dirty surfaces - cleaning thoroughly

Remove the dirt. Soak a clean cloth in water containing household soap and wring it. As you wipe the surface clean, ensure you always move the cloth in the direction of the casework. You can also soak a clean cloth in water containing alcohol or a similar product, and clean the surface. Wipe with a clean, dry cloth.

To be avoided

Never use abrasive or particularly aggressive products, such as steel wool, abrasive powder or other furniture polishes, because they can cause irreparable surface scratches.

Stain removal

	Detergent products for home use	Alcohol, window cleaning products	Turpentine oil, acetone, perchloroethylene	Special solvents, graffiti solvents
Finger marks	X			
Grease, oil	X		X	
Shoe marks	X		X	
Soot, nicotine	X			
Ink	X		X	
Coffee, tea	X			
Fruit juice	X			
Chalk, fountain pen ink	X			
Markers		X	X	
Paint		X	X	X
Glue	It is not possible to remove certain types of glue, especially dried bicomponent glues, without damaging the surface.		X	
Lipstick, shoe-polish, wax			X	
Lime, calcareous deposits	Remove them with a 10% acetic acid solution. Be very careful when using scale removers, since they might contain highly corrosive substances which will damage the surface of the laminate.			
Rust	X	Employ a citric acid solution for resistant stains.		

Stains caused by paint, markers, pen ink, etc.

Use organic solvents, such as denatured alcohol, turpentine oil, acetone, graffiti solvents, etc. Remove solvent residues with water containing a household soap. Do not use a nitrocellulose-based thinner. Always conduct cleaning operations in an airy room and away from open flames.

Note: After removing stains, carefully clean the surface with soapy water. Dry the panel.

Laminate data sheet

Properties	Test method	Property or attribute	Unit	Results
Surface quality	EN 438-2.4	Spots, dirt and similar surface defects	mm ² /ms	≤ 1
		Fibers, hair and scratches	mm ² /m ²	≤ 10
Dimensional tolerances	EN 438-2.5	Thickness tolerance	mm	0.9 + 0.10
	EN 438-2.6	Length and width	mm	± 10 / 0
	EN 438-2.7	Straightness of edge	mm/m	≤ 1.5
	EN 438-2.8	Squareness	mm/m	≤ 1.5
	EN 438-2.9	Flatness	mm/m	≤ 60
Resistance to surface wear	EN 438-2.10	Initial point	Revolutions	≥ 200
Resistance to immersion in boiling water	EN 438-2.12	Appearance	Ratings	≥ 4
Resistance to water vapor	EN 438-2.14	Appearance	Ratings	≥ 4
Resistance to dry heat (180°C)	EN 438-2.16	Appearance	Ratings	≥ 4
Resistance to wet heat (100°C)	EN 12721:1997	Appearance	Ratings	≥ 4
Dimensional stability at high temperatures	EN 438-2.17	Cumulative dimensional change	Longitudinal %	≤ 0.55
		Cumulative dimensional change	Transversal %	≤ 1.05
Resistance to impact with small diameter ball	EN 438-2.20	Spring force	N	≥ 21
Resistance to impact with large diameter ball	EN 438-2.21	Drop height	mm	≥ 1000
		Indentation diameter	mm	≤ 10
Resistance to cracking	EN 438-2.23	Appearance	Rating	≥ 4
Resistance to scratching	EN 438-2.25	Appearance	Rating	≥ 4
Resistance to staining	EN 438-2.26	Appearance - Group 1 and 2	Rating	5
		Appearance - Group 3	Rating	≥ 4
Light fastness (xenon-arc)	EN 438-2.27	Contrast	Grey scale rating	≥ 4
Gloss level	ISO 2813	Surface specular reflectance	Gloss unit	5-15 (measured at 85°)

Properties	Test method	Property or attribute	Unit	Results
Electrostatic property	EN 61340-4-1	Surface electrical resistance:	ohms	7.76×10^{11}
		Point to point resistance Vertical resistance	ohms	1.23×10^{11}
Density	EN ISO 1183	Density	g/cm ³	≥ 1.35
Resistance to micro scratches	EN 438-2.30	Visual assessment	Rating	5
Acids resistance	SEFA 8-PL-2016 Section 8.1	Chemical spot test	pass/not pass	pass
Hygiene (suitability for food service)	NSF	NSF/ANSI 35	mg/m ³	pass
Contact with food - overall migration	EN 1186-3	3% acetic acid 24h @ 40°C	mg/dm ²	0.5
	EN 1186-3	50% ethanol 24h @ 40°C	mg/dm ²	0.6
	EN 1186-14	95% ethanol 24 h @ 40°C	mg/dm ²	1.0
	EN 1186-14	isooctane 24h @ 40°C	mg/dm ²	< 0.1
Contact with food - formaldehyde specific migration	EN 13130-23	3% acetic acid 24h @ 40°C	mg/kg	< 15
Formaldehyde emissions	EN 13986	Formaldehyde emission rating	Rating	E1
VOC emissions	AFNOR NF EN ISO 16000-9	Classification	mg/m ³	A+
		Formaldehyde	mg/m ³	≤ 0.002
		Acetaldehyde	mg/m ³	≤ 0.002
		Toluene	mg/m ³	≤ 0.002
		Tetrachlorethylene	mg/m ³	≤ 0.002
		Xylene	mg/m ³	≤ 0.002
		Trimethylbenzene	mg/m ³	≤ 0.002
		TVOC	mg/m ³	≤ 0.01
Evaluation of micro-organisms action	JIS Z 2801:2010	Antimicrobial activity after 24h at 35°C	bacterial viability: log reduction reduction %	> 3.6 > 99.975
Phenol free	EN ISO 16000-9	Phenol content in resin		Phenol free
Reaction to fire - standard version	ASTM E84-20	Flame spread and smoke developed	Classification	Class B
Reaction to fire - FR version	ASTM E84-20	Flame spread and smoke developed	Classification	Class A

RAUVISIO

Panel and finished component limited warranty

10-year limited warranty

REHAU Industries LLC

On the terms set forth in this Limited Warranty, REHAU Industries LLC ("REHAU") warrants to the Authorized Claimant that the Covered Products will be free from Covered Defects during the Warranty Period.

Adjusted Warranty Payment: For the first two years of the Warranty Period, coverage includes 100% of the purchase price paid by the Original Purchaser for the defective Covered Products. For the remaining time of the Warranty Period, the Adjusted Warranty Payment shall be equal to such original purchase price reduced by 10% for each year after the end of year two of the Warranty Period.

Authorized Claimant: The Original Purchaser or the Original Property Owner; shall not include a subsequent purchaser of the real property.

Claims Procedure: All claims under this warranty must be submitted by the Authorized Claimant, in writing, promptly following discovery and must further submit proof of date of purchase. REHAU may require damaged product to be returned prior to judgment of claim. REHAU upon receipt of the above, within a reasonable time frame, will inspect the Covered Products.

For RAUVISIO panels:

"Covered Defects" are (i) a lack of flatness greater than 1.5 MM per 1 FT in any direction, (ii) a color change (of solid color surfaces only) from the original color supplied beyond a Delta E of 4.0, or (iii) delamination of the decorative surface to the wooden substrate. Covered Defects do not include defects and damages due to: (a) fabrication of Covered Products, (b) installation or altering of Covered Products, (c) ordinary wear and tear, (d) any failure of Original Purchaser, Property Owner, or any third party to comply with any recommendations of REHAU as to the fabrication, transportation, use or storage of Covered Products, and (e) accidents, misuse, abuse, chemicals, excessive temperature, water damage, impact of foreign objects, or any other causes or occurrences beyond REHAU's control.

For RAUVISIO finished components:

"Covered Defects" are (i) a lack of flatness greater than 1.5 MM per 1 FT in any direction, (ii) a color change (of solid color surfaces only) from the original color supplied beyond a Delta E of 4.0, or (iii) delamination of the decorative surface or edgebanding. Covered Defects do not include defects and damages due to: (a) fabrication of Covered Products, (b) installation or altering of Covered Products, (c) ordinary wear and tear, (d) any failure of Original Purchaser, Property Owner, or any third party to comply with any recommendations of REHAU as to the fabrication, transportation, use or storage of Covered Products, and (e) accidents, misuse, abuse, chemicals, excessive temperature, water damage, impact of foreign objects, or any other causes or occurrences beyond REHAU's control.

"Covered Products" are laminates, panels, or finished components manufactured by REHAU for use in kitchen cabinet doors or other finished components in accordance with the recommendations and specifications of REHAU. These "Covered Products" are for indoor use only.

"Original Purchaser" is an individual or company that directly purchases Covered Products from REHAU.

"Original Property Owner" is the individual (or if more than one, individuals) or company that owns the real property at the time of installation of the Covered Products.

"Remedy" If REHAU determines that a claim is valid in accordance with the terms of this warranty, REHAU will at its option, either pay to the Authorized Claimant the Adjusted Warranty Payment for said defective Covered Product, or repair the defective Covered Product, or replace the defective Covered Product by shipping replacement finished products. If the defective Covered Product is no longer in production or for any reason is no longer available, REHAU will substitute, at its discretion, similar finished panels as a replacement. The Warranty Period for replaced defective Covered Products will continue to be covered under the original Warranty Period.

"Warranty Period" is ten years from the date of purchase of the Covered Products by the Original Purchaser.

THE WARRANTY GIVEN IN THIS DOCUMENT IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED ON THE PART OF REHAU. REHAU DISCLAIMS ANY WARRANTY, EXPRESS OR IMPLIED, OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT WILL REHAU BE LIABLE FOR INDIRECT, CONSEQUENTIAL OR INCIDENTAL DAMAGES, INCLUDING, BUT NOT LIMITED TO, COSTS INCURRED IN THE FABRICATION OF THE REPLACEMENT PRODUCTS, INSTALLATION OF THE FINISHED PRODUCTS INTO THE STRUCTURE OR LOSS OF PROFIT, REVENUE OR GOODWILL WHETHER ARISING FROM NEGLIGENCE, TORT, CONTRACT, STRICT LIABILITY OR OTHERWISE. EXCEPT FOR THE EXPRESS LIABILITY SET FORTH ABOVE, REHAU DOES NOT ASSUME ANY FURTHER OBLIGATIONS OR LIABILITY. Some states or provinces may not allow limitations on implied warranties, and some states may not allow the exclusion or limitation of incidental or consequential damages, so these limitations or exclusions may not apply to you. These warranties give you specific legal rights, and you may also have other rights which vary from state to state or province to province.



RAUVISIO noir™ Monotonic Matte Surface Laminate

Section 06400

Architectural millwork specification information

01 General

1.1 Related sections

- A. Section 06410 – Custom cabinets
- B. Section 12320 – Manufactured wood casework
- C. Section 12350 – Specialty casework

1.2 Submittals

- A. Submit under provisions of Section 01300
- B. Manufacturer's data sheets on product being used
 - 1. RAUVISIO noir technical information

1.3 Quality assurance and testing

- A. Installer qualifications: Cabinet/millwork professional
- B. Testing information can be found in the RAUVISIO noir technical information

1.4 Storage and handling

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Store in dry, protected, well-ventilated area and protect from damage.
- C. Store away from dust and debris.

1.5 Safety

- A. To ensure safety and proper use of the product, follow manufacturer's safety guidelines found in the RAUVISIO noir technical information.

1.6 Project conditions

- A. Maintain environmental conditional (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimal results. Do not install products under environmental conditions outside manufacturer's absolute limits.

1.7 Warranty

- A. Provide manufacturer's limited warranty

02 Products

2.1 Manufacturers

- A. Acceptable manufacturer: REHAU Industries LLC
 - 1501 Edwards Ferry Road NE Leesburg, VA 20176
 - (703) 777-5255 | info@rehau.com | www.rehau.com/us-en
- B. Substitutions: Not permitted.
- C. Requests for substitutions will be considered in accordance with provisions of Section 01600.

2.2 RAUVISIO noir Monotonic Matte Surface Laminate by REHAU Industries

- A. Approved product: REHAU's RAUVISIO noir Monotonic Matte Surface Laminate
 - 1. RAUVISIO noir Monotonic Matte Surface Laminate fabricated by approved fabricator
 - a. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate After Dark 154708
 - b. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Boxcar Blonde 154714
 - c. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Capital Starlit 154706
 - d. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Casa Blanca 154705
 - e. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Gaslit Alley 154712
 - f. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate High Low 154707
 - g. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Maltese Mist 154704
 - h. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Midnight Dash 154713

- i. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Olive Detour 154715
- j. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Silver Lake 154709
- k. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Smoke Stack 154710
- l. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Trench Coat 154711
- m. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Platinum Sands 155001
- n. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Gimlet Haze 155064
- o. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Decoy Dusk 155065
- p. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Sierra Social 155000
- q. 0.9 mm RAUVISIO noir Monotonic Matte Surface Laminate Taupe Farewell 155063

2.3 RAUVISIO noir matching edgebanding by REHAU Industries

A. Approved product: REHAU LaserEdge™ edgebanding

1. RAUVISIO noir Elegant Matte REHAU LaserEdge edgebanding, fabricated by approved manufacturer
 - a. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte After Dark 140339
 - b. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Boxcar Blonde 140958
 - c. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Capital Starlit 140038
 - d. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Casa Blanca 78919
 - e. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Gaslit Alley 71436
 - f. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte High Low 78828
 - g. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Maltese Mist 140986
 - h. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Midnight Dash 140622
 - i. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Olive Detour 140607
 - j. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Silver Lake 71407
 - k. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Smoke Stack 140614
 - l. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Trench Coat 140337
 - m. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Platinum Sands C200838
 - n. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Gimlet Haze C700208
 - o. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Decoy Dusk C600897
 - p. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Sierra Social C300357
 - q. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Taupe Farewell C400815

03 Execution

3.1 Examination

A. Do not begin installation until all products are properly prepared and hardware installed.

3.2 Installation

A. Install in accordance to manufacturer's instructions found in the RAUVISIO noir technical information using screw on European concealed hinges.

3.3 Protection

- A. Protect installed product until completion of project.
- B. Remove peel coat after installation of product.

04 Links

4.1 RAUVISIO noir technical information

www.rehau.com/downloads/1044082/rauvisio-noir-technical-information.pdf

4.2 RAUVISIO noir laminate and edgeband limited warranty

www.rehau.com/downloads/734738/standard-purchase-terms-and-conditions.pdf

4.3 RAUVISIO noir

na.rehau.com/noir

RAUVISIO noir™ Monotonic Matte Surface Board

Section 06400

Architectural millwork specification information

01 General

1.1 Related sections

- A. Section 06410 – Custom cabinets
- B. Section 12320 – Manufactured wood casework
- C. Section 12350 – Specialty casework

1.2 Submittals

- A. Submit under provisions of Section 01300
- B. Manufacturer's data sheets on product being used
 - 1. RAUVISIO noir technical information

1.3 Quality assurance and testing

- A. Installer qualifications: Cabinet/millwork professional
- B. Testing information can be found in the RAUVISIO noir technical information

1.4 Storage and handling

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Store in dry, protected, well-ventilated area and protect from damage.
- C. Store away from dust and debris.

1.5 Safety

- A. To ensure safety and proper use of the product, follow manufacturer's safety guidelines found in the RAUVISIO noir technical information.

1.6 Project conditions

- A. Maintain environmental conditional (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimal results. Do not install products under environmental conditions outside manufacturer's absolute limits.

1.7 Warranty

- A. Provide manufacturer's limited warranty

02 Products

2.1 Manufacturers

- A. Acceptable manufacturer: REHAU Industries LLC
 - 1501 Edwards Ferry Road NE Leesburg, VA 20176
 - (703) 777-5255 | info@rehau.com | www.rehau.com/us-en
- B. Substitutions: Not permitted.
- C. Requests for substitutions will be considered in accordance with provisions of Section 01600.

2.2 RAUVISIO noir Monotonic Matte Surface Board by REHAU Industries

- A. Approved product: REHAU's RAUVISIO noir Monotonic Matte Surface Board
 - 1. RAUVISIO noir Monotonic Matte Surface Laminate fabricated by approved fabricator
 - a. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board After Dark 154708
 - b. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Boxcar Blonde 154714
 - c. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Capital Starlit 154706
 - d. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Casa Blanca 154705
 - e. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Gaslit Alley 154712
 - f. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board High Low 154707
 - g. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Maltese Mist 154704
 - h. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Midnight Dash 154713

- i. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Olive Detour 154715
- j. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Silver Lake 154709
- k. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Smoke Stack 154710
- l. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Trench Coat 154711
- m. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Platinum Sands 155001
- n. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Gimlet Haze 155064
- o. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Decoy Dusk 155065
- p. 19.5 mm RAUVISIO noir Monotonic Matte Surface Board Sierra Social 155000
- q. 19.5mm RAUVISIO noir Monotonic Matte Surface Board Taupe Farewell 155063

2.3 RAUVISIO noir matching edgebanding by REHAU Industries

A. Approved product: REHAU LaserEdge™ edgebanding

1. RAUVISIO noir Elegant Matte REHAU LaserEdge edgebanding, fabricated by approved manufacturer
 - a. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte After Dark 140339
 - b. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Boxcar Blonde 140958
 - c. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Capital Starlit 140038
 - d. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Casa Blanca 78919
 - e. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Gaslit Alley 71436
 - f. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte High Low 78828
 - g. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Maltese Mist 140986
 - h. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Midnight Dash 140622
 - i. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Olive Detour 140607
 - j. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Silver Lake 71407
 - k. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Smoke Stack 140614
 - l. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Trench Coat 140337
 - m. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Platinum Sands C200838
 - n. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Gimlet Haze C700208
 - o. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Decoy Dusk C600897
 - p. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Sierra Social C300357
 - q. 15/16" x 1.2 mm REHAU LaserEdge Elegant Matte Taupe Farewell C400815

03 Execution

3.1 Examination

A. Do not begin installation until all products are properly prepared and hardware installed.

3.2 Installation

A. Install in accordance to manufacturer's instructions found in the RAUVISIO noir technical information using screw on European concealed hinges.

3.3 Protection

- A. Protect installed product until completion of project.
- B. Remove peel coat after installation of product.

04 Links

4.1 RAUVISIO noir technical information

www.rehau.com/downloads/1044082/rauvisionoir-technical-information.pdf

4.2 RAUVISIO noir board limited warranty

www.rehau.com/downloads/1532224/rauvision-panel-and-finished-component-limited-warranty.pdf

4.3 RAUVISIO noir edgeband limited warranty

www.rehau.com/downloads/734738/standard-purchase-terms-and-conditions.pdf

4.4 RAUVISIO noir

na.rehau.com/noir

RAUVISIO noir™ Monotonic Matte Surface Cabinet Doors

Section 06400

Architectural millwork specification information

01 General

1.1 Related sections

- A. Section 06410 – Custom cabinets
- B. Section 12320 – Manufactured wood casework
- C. Section 12350 – Specialty casework

1.2 Submittals

- A. Submit under provisions of Section 01300
- B. Manufacturer's data sheets on product being used
 - 1. RAUVISIO noir technical information

1.3 Quality assurance and testing

- A. Installer qualifications: Cabinet/millwork professional
- B. Testing information can be found in the RAUVISIO noir technical information

1.4 Storage and handling

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Store in dry, protected, well-ventilated area and protect from damage.
- C. Store away from dust and debris.

1.5 Safety

- A. To ensure safety and proper use of the product, follow manufacturer's safety guidelines found in the RAUVISIO noir technical information.

1.6 Project conditions

- A. Maintain environmental conditional (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimal results. Do not install products under environmental conditions outside manufacturer's absolute limits.

1.7 Warranty

- A. Provide manufacturer's limited warranty

02 Products

2.1 Manufacturers

- A. Acceptable manufacturer: REHAU Industries LLC
 - 1501 Edwards Ferry Road NE Leesburg, VA 20176
 - (703) 777-5255 | info@rehau.com | www.rehau.com/us-en
- B. Substitutions: Not permitted.
- C. Requests for substitutions will be considered in accordance with provisions of Section 01600.

2.2 RAUVISIO noir Monotonic Matte Surface Cabinet Doors by REHAU Industries

- A. Approved product: REHAU's RAUVISIO noir Monotonic Matte Surface Cabinet Doors
 - 1. RAUVISIO noir Monotonic Matte Surface Cabinet Doors fabricated by approved fabricator
 - a. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors After Dark 154708
 - b. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Boxcar Blonde 154714
 - c. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Capital Starlit 154706
 - d. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Casa Blanca 154705
 - e. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Gaslit Alley 154712
 - f. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors High Low 154707
 - g. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Maltese Mist 154704
 - h. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Midnight Dash 154713

- i. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Olive Detour 154715
- j. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Silver Lake 154709
- k. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Smoke Stack 154710
- l. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Trench Coat 154711
- m. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Platinum Sands 155001
- n. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Gimlet Haze 155064
- o. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Decoy Dusk 155065
- p. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Sierra Social 155000
- q. 19.5 mm RAUVISIO noir Monotonic Matte Surface Cabinet Doors Taupe Farewell 155063

03 Execution

3.1 Examination

A. Do not begin installation until all products are properly prepared and hardware installed.

3.2 Installation

A. Install in accordance to manufacturer's instructions found in the RAUVISIO noir technical information using screw on European concealed hinges.

3.3 Protection

- A. Protect installed product until completion of project.
- B. Remove peel coat after installation of product.

04 Links

4.1 RAUVISIO noir technical information

www.rehau.com/downloads/1044082/rauvio-noir-technical-information.pdf

4.2 RAUVISIO noir cabinet door limited warranty

www.rehau.com/downloads/1532224/rauvio-panel-and-finished-component-limited-warranty.pdf

4.3 RAUVISIO noir

na.rehau.com/noir

RAUVISIO noir™ Monotonic Matte Surface Floating Shelves

Section 06400

Architectural millwork specification information

01 General

1.1 Related sections

- A. Section 06410 – Custom cabinets
- B. Section 12320 – Manufactured wood casework
- C. Section 12350 – Specialty casework
- D. Section 105629 - Storage racks

1.2 Submittals

- A. Submit under provisions of Section 01300
- B. Manufacturer's data sheets on product being used
 - 1. RAUVISIO noir technical information

1.3 Quality assurance and testing

- A. Installer qualifications: Cabinet/millwork professional
- B. Testing information can be found in the RAUVISIO noir technical information

1.4 Storage and handling

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Store in dry, protected, well-ventilated area and protect from damage.
- C. Store away from dust and debris.

1.5 Safety

- A. To ensure safety and proper use of the product, follow manufacturer's safety guidelines found in the REHAU Floating Shelf Instruction Manual.

1.6 Project conditions

- A. Maintain environmental conditional (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimal results. Do not install products under environmental conditions outside manufacturer's absolute limits.

1.7 Warranty

- A. Provide manufacturer's limited warranty

02 Products

2.1 Manufacturers

- A. Acceptable manufacturer: REHAU Industries LLC
 - 1501 Edwards Ferry Road NE Leesburg, VA 20176
 - (703) 777-5255 | info@rehau.com | www.rehau.com/us-en
- B. Substitutions: Not permitted.
- C. Requests for substitutions will be considered in accordance with provisions of Section 01600.

2.2 RAUVISIO noir Monotonic Matte Surface Floating Shelves by REHAU Industries

- A. Approved product: REHAU's RAUVISIO noir Monotonic Matte Surface Floating Shelves
 - 1. RAUVISIO noir Monotonic Matte Surface Floating Shelves fabricated by approved fabricator
 - a. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves After Dark 154708
 - b. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Boxcar Blonde 154714
 - c. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Capital Starlit 154706
 - d. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Casa Blanca 154705
 - e. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Gaslit Alley 154712
 - f. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves High Low 154707
 - g. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Maltese Mist 154704

- h. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Midnight Dash 154713
- i. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Olive Detour 154715
- j. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Silver Lake 154709
- k. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Smoke Stack 154710
- l. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Trench Coat 154711
- m. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Platinum Sands 155001
- n. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Gimlet Haze 155064
- o. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Decoy Dusk 155065
- p. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Sierra Social 155000
- q. 60.3 mm RAUVISIO noir Monotonic Matte Surface Floating Shelves Taupe Farewell 155063

03 Execution

3.1 Examination

A. Do not begin installation until confirming all REHAU floating shelf package contents are complete and included with the shelf, per the REHAU Floating Shelf Instruction Manual.

3.2 Installation

A. Install in accordance to manufacturer's instructions found in the REHAU Floating Shelf Instruction Manual.

3.3 Protection

- A. Protect installed product until completion of project.
- B. Remove peel coat after installation of product.

04 Links

4.1 RAUVISIO noir technical information

www.rehau.com/downloads/1044082/rauvio-noir-technical-information.pdf

4.2 REHAU Floating Shelf Instruction Manual

www.rehau.com/downloads/1620524/rehau-floating-shelves-installation-instructions.pdf

4.3 RAUVISIO noir cabinet door limited warranty

www.rehau.com/downloads/1532224/rauvio-panel-and-finished-component-limited-warranty.pdf

4.4 RAUVISIO noir

na.rehau.com/noir

Customer Service Contacts

Hours Monday to Friday, 8 am to 4:30 pm EST

Email orders.us@rehau.com

www.na.rehau.com/cabinetdoors

United States

Phone (888) 734-2810 Fax (616) 285-7622

Canada

Phone (888) 905-0345 Fax (514) 905-0490

For updates to publication, visit na.rehau.com/resourcecenter

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained therefrom. Before using, the user will determine suitability of the information for user's intended use and shall assume all risk and liability in connection therewith.

© 2025 REHAU

100. en 03.2025