

By: AKH
 Rev.--- By: ---
 Chk: ---

Date May 2026
 Date ---
 Date ---

Macaulay Test

Macaulay Beam Analysis - BetaTesting

01 - Steel - Uniform Distributed Load

Bridge, L = in
 Beam Sect = W14x61
 A = 17.90 in²
 I = 640.00 in⁴

E = 29,000,000 lb / in²
 G = 1.740E+06 lb / in² = 0.06*29,000,000

Length Units in
 Force Units lb


Beam Segments (First Segment Begins at 0)

	Segment No.	X End	A	I	E	G
		in	in ²	in ⁴	lb / in ²	lb / in ²
DO NOT DELETE ROWS (GRAPHED)	1	600.00	17.90	640.00	2.900E+07	3.115E+07
	2					
	3					
	4					
	5					

Supports

Perscribed Disp. (typ 0)

	Supp. No.	X	dY (vert)	dr (rot)
		in	in	rad
DO NOT DELETE ROWS (GRAPHED)	1	0.0	0.0	0.000
	2	600.0	0.0	0.000
	3			
	4			
	5			

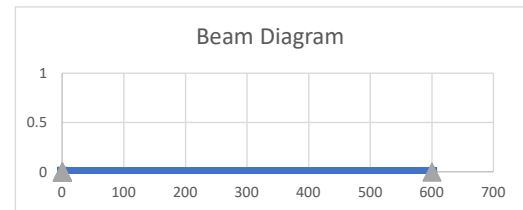


Distributed Loads (downward loads entered as NEGATIVE) - UNFACTORED

	Load No.	x1	x2	w1 (at x1)	w2 (at x2)
		in	in	lb / in	lb / in
DO NOT DELETE ROWS (GRAPHED)	1	0.0	600.0	-4.2	-4.2
	2	0.0	0.0	0.0	0.0
	3	0.0	0.0	0.0	0.0
	4	0.0	0.0	0.0	0.0
	5	0.0	0.0	0.0	0.0

Load
lb / ft
50.0
0.0
0.0
0.0

Point Loads - UNFACTORED

	Load No.	X	Py	My
		in	lb	lb-in
DO NOT DELETE ROWS (GRAPHED)	1	150	0.00	0.00
	2	0	0.00	0.00
	3			
	4			
	5			

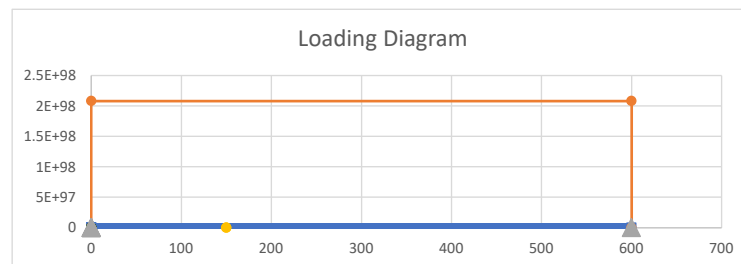

By: AKH
 Rev.--- By: ---
 Chk: ---

Date May 2026
 Date ---
 Date ---

Macaulay Test

BEAM REACTIONS

Position (X)	Enforced Disp (dy)	Enforced Rot (theta)	Vert Reac (Ry)	Internal Reac (Mz)	Note
(L)	(L)	(rad)	(F)	(F-L)	(---)
0.00	0.0	0.0	1,250.0	0.0	Support reaction
600.00	0.00	0.00	1,250.0	0.0	Support reaction

Vert Reac

(kip)
1.250
1.250

BEAM REACTIONS EQUILIBRIUM CHECK




Item	Units	Loads	Reactions	Residual	Check Sum
Sum Fy	F	-2,500.0	2,500.0	0.0	OK
Sum M @ x=0	F-L	-750,000.00	750,000.0	0.0	OK

BEAM MAX/MIN LOAD EFFECTS

Item	Position (X)	Value
(---)	(L)	(F or F-L)
Max +V	0.00	1250.0
Max -V	594.00	-1225.0
Max +M	300.00	187500.0
Max -M	0.00	0.0
Max Defl	300.00	-0.3788


Value

(---)	
1.250	kip
-1.225	kip
15.625	kip-ft
0.000	kip-ft
-0.379	in

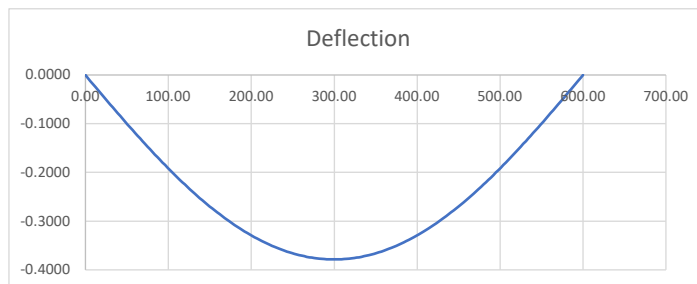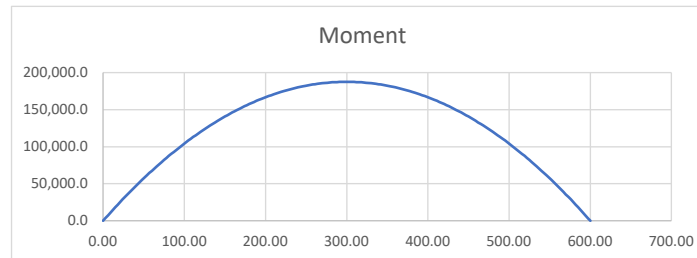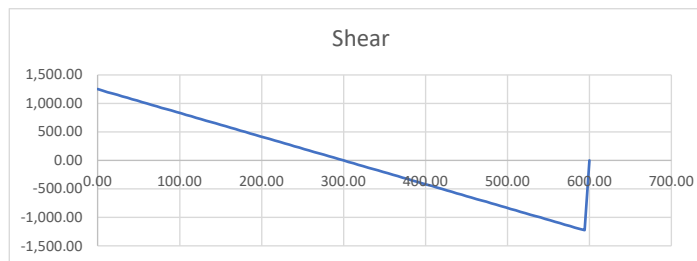

SKYCIV BEAM ANALYSIS REPORT

Load Combination: DL

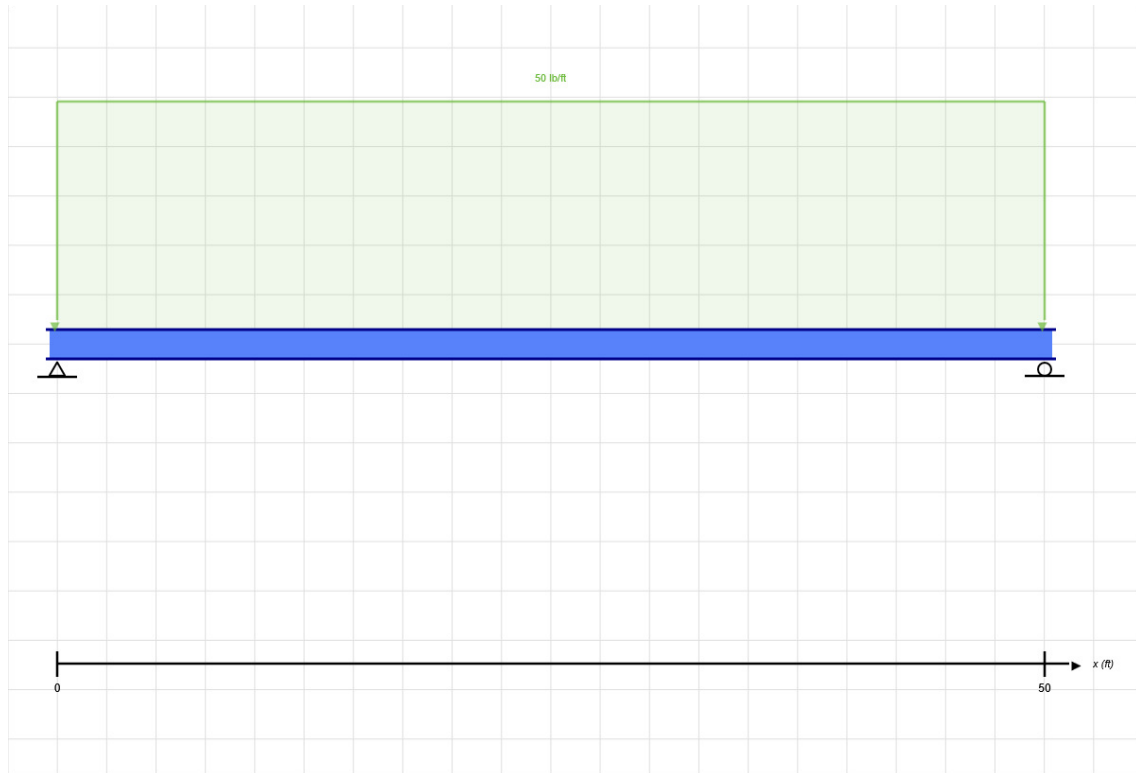

Software: SkyCiv Beam v3.3.2
Tue Jun 09 2026 10:46:34 GMT-0400 (Eastern Daylight Time)

Project Info

Included in this Report:

- Input Summary
- Beam Section
- Free Body Diagram (FBD)
- Analysis Summary
- Analysis Results

SKYCIV FREE TRIAL EDITION

INPUT SUMMARY

General Info

Beam Length:	50 ft
Section Name:	W14x61
Self Weight:	False


Supports

Support Type	Location
Pinned	0 ft
Roller	50 ft

Loads

Load Type	Location	Magnitude	Load Case
Distributed Load	0 ft to 50 ft	-50 lb to -50 lb	DL

Beam Section

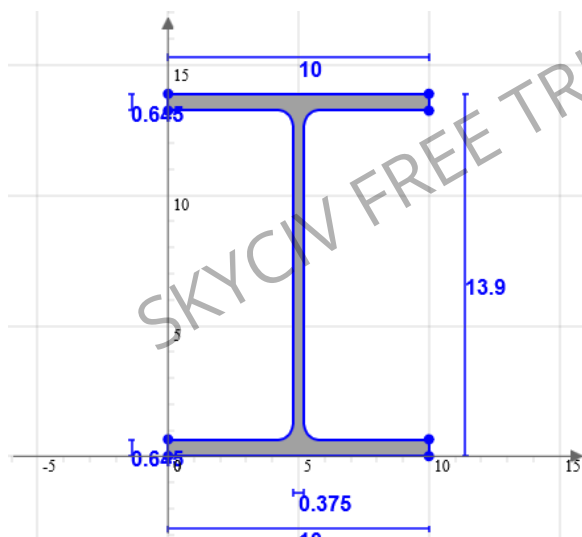

Geometric Properties		
A	17.9	in ²
C _z	5	in
C _y	6.95	in


Bending Properties		
I _z	640	in ⁴
I _y	107	in ⁴

Shear Properties		
A _z	11.277	in ²
A _y	4.99	in ²

Torsion Properties		
J	2.19	in ⁴
r	0.991	in

Shape	Material	E (ksi)	v	ρ (lb/ft ³)
W14x61	Structural Steel	29000	0.27	490

FREE BODY DIAGRAM

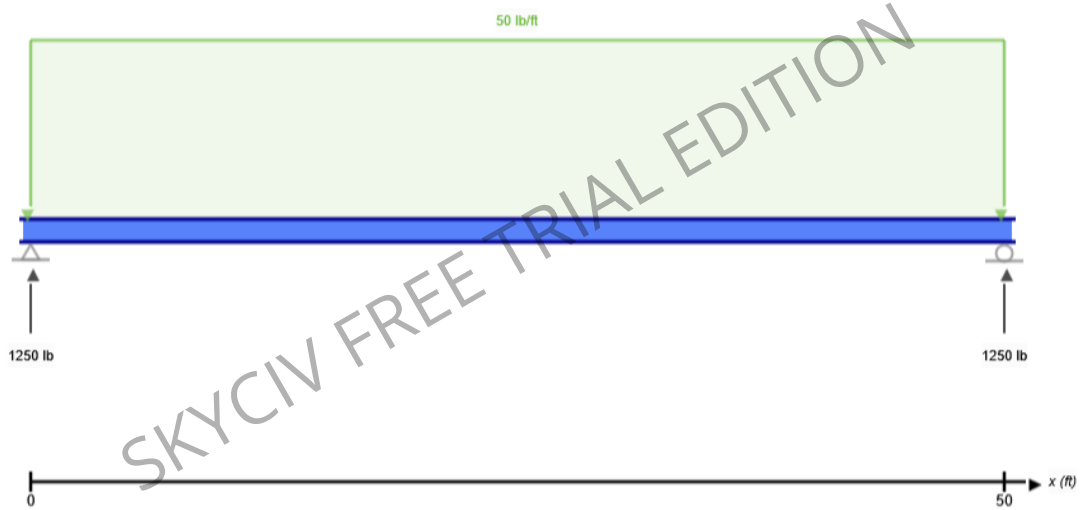

RESULT SUMMARY

Check	Status	Limit	Ratio	Max
Deflection	PASS	L/250	0.158	L/1583
Custom Stress Limit	PASS	39 ksi	0.052	2.036 ksi
Material Yield	PASS	36 ksi	0.057	2.036 ksi
Material Strength	PASS	58 ksi	0.035	2.036 ksi

ANALYSIS RESULTS

Reactions

Support at	R _x (lb)	R _y (lb)	M (kip-ft)
0	0	1250	0
50	0	1250	0

Force Extremes

Result	Max	Min
Bending Moment	15.625 kip-ft	0 kip-ft
Shear	1250 lb	-1250 lb
Displacement Y	0 in	-0.379 in

Stress Extremes

Result	Max (ksi)	Min (ksi)
Bending Stress	2.036	-2.036
Shear Stress Total	0.267	0
Max Combined Normal Stress	2.036	0
Min Combined Normal Stress	0	-2.036