

By: AKH
 Rev.--- By: ---
 Chk: ---

Date May 2026
 Date ---
 Date ---

Macaulay Test

Macaulay Beam Analysis - BetaTesting

10 - Steel - Single Span - Multiple Segments

Bridge, L = in
 Beam Sect = W14x61 W14x90
 A = 17.90 26.50 in²
 I = 640.00 999.00 in⁴

E = 29,000,000 lb / in²
 G = 1.740E+06 lb / in² = 0.06*29,000,000

Length Units in
 Force Units lb


Beam Segments (First Segment Begins at 0)

	Segment No.	X End	A	I	E	G
		in	in ²	in ⁴	lb / in ²	lb / in ²
DO NOT DELETE ROWS (GRAPHED)	1	200.00	17.90	640.00	2.900E+07	3.115E+07
	2	400.00	26.50	999.00	2.900E+07	3.115E+07
	3	600.00	17.90	640.00	2.900E+07	3.115E+07
	4					
	5					

Supports

Perscribed Disp. (typ 0)

	Supp. No.	X	dY (vert)	dr (rot)
		in	in	rad
DO NOT DELETE ROWS (GRAPHED)	1	0.0	0.0	0.000
	2	600.0	0.0	0.000
	3			
	4			
	5			

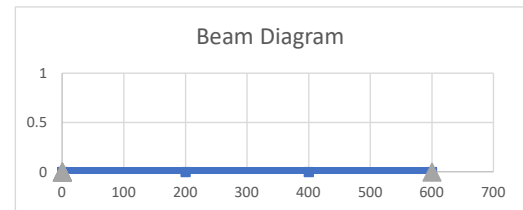


Distributed Loads (downward loads entered as NEGATIVE) - UNFACTORED

	Load No.	x1	x2	w1 (at x1)	w2 (at x2)
		in	in	lb / in	lb / in
DO NOT DELETE ROWS (GRAPHED)	1	0.0	0.0	0.0	0.0
	2	0.0	0.0	0.0	0.0
	3	0.0	0.0	0.0	0.0
	4	0.0	0.0	0.0	0.0
	5	0.0	0.0	0.0	0.0

Load
lb / ft
0.0
0.0
0.0
0.0

Point Loads - UNFACTORED

	Load No.	X	Py	My
		in	lb	lb-in
DO NOT DELETE ROWS (GRAPHED)	1	200	-5000.00	0.00
	2	0	0.00	0.00
	3			
	4			
	5			

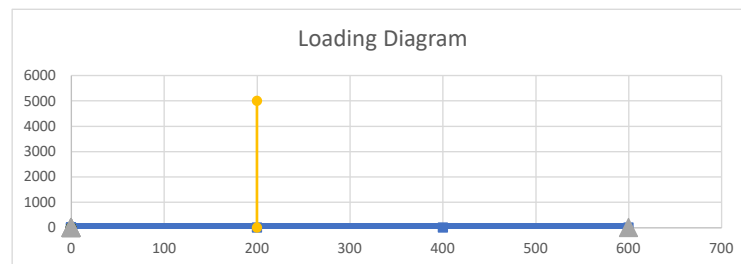

By: AKH
 Rev.--- By: ---
 Chk: ---

Date May 2026
 Date ---
 Date ---

Macaulay Test

BEAM REACTIONS

Position (X)	Enforced Disp (dy)	Enforced Rot (theta)	Vert Reac (Ry)	Internal Moment (Mz)	Note
(L)	(L)	(rad)	(F)	(F-L)	(---)
0.00	0.0	0.0	3,333.3	0.0	Support reaction
600.00	0.00	0.00	1,666.7	0.0	Support reaction

Vert Reac
(kip)
3.333
1.667




BEAM REACTIONS EQUILIBRIUM CHECK

Item	Units	Loads	Reactions	Residual	Check Sum
Sum Fy	F	-5,000.0	5,000.0	0.0	OK
Sum M @ x=0	F-L	-1.0000E+06	1.0000E+06	0.0	OK

BEAM MAX/MIN LOAD EFFECTS

Item	Position (X)	Shear (V)	Moment (M)	Defl. (delta)
(---)	(L)	(F)	(F-L)	(L)
Max +V	0.00	3,333.3	0.0	0.0000
Max -V	200.00	-1,666.7	666,666.7	-0.7561
Max +M	200.00	-1,666.7	666,666.7	-0.7561
Max -M	600.00	0.0	0.0	0.0000
Max Defl	264.00	-1,666.7	560,000.0	-0.8011

Max/Min Value
(---)
3.33 kip
-1.67 kip
55.56 kip-ft
0.00 kip-ft
-0.801 in

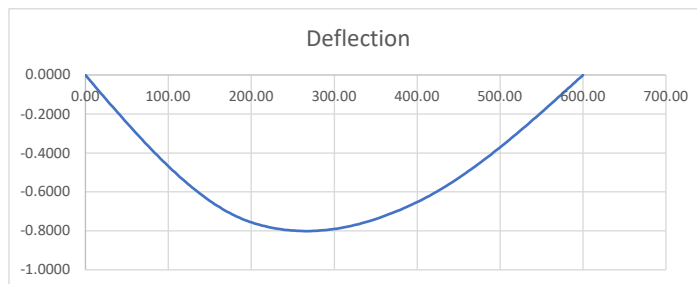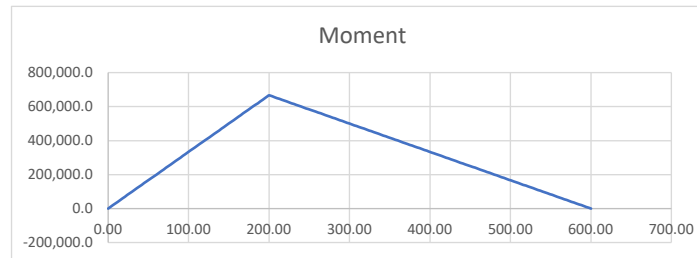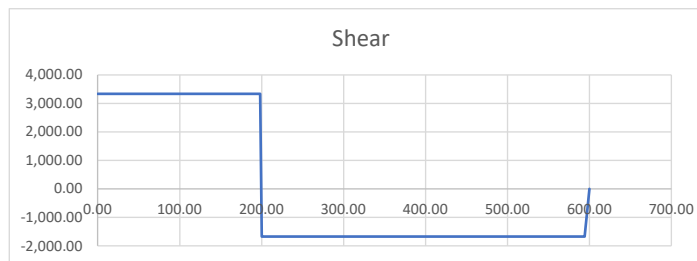

steel-2segment SkyCiv Report

Wed 10 Jun 2026, 02:28PM (GMT-04:00)



File Name: steel-2segment

Software: SkyCiv Structural 3D v7.2.8 (Lic. No.: 1TgQdZH4tY4w7B6tTe9n93aY)

Analysis Type: Linear Static Analysis

Included in this Report:

Job Setup
Bill of Materials
Nodal Results
Member Results

Table of Contents

Table of Contents

Job Setup

- NODE COORDINATES
- MEMBERS
- SUPPORTS
- MATERIALS
- SECTIONS
- POINT LOADS
- LOAD COMBINATIONS
- LOAD CASES

Bill of Materials

- BILL OF MATERIALS FOR MEMBERS

Nodal Results

Load Case: D

- NODE REACTIONS
- MEMBER END FORCES AND MOMENTS
- NODAL DISPLACEMENTS

Load Group: D1

- NODE REACTIONS
- MEMBER END FORCES AND MOMENTS
- NODAL DISPLACEMENTS

Member Results

Load Case: D

- INTERNAL MEMBER FORCES AND MOMENTS
- GROUPS SUMMARY - INTERNAL MEMBER FORCES AND MOMENTS
- MEMBER DISPLACEMENTS
- MEMBER LOCAL DISPLACEMENTS

Load Group: D1

- INTERNAL MEMBER FORCES AND MOMENTS
- GROUPS SUMMARY - INTERNAL MEMBER FORCES AND MOMENTS
- MEMBER DISPLACEMENTS
- MEMBER LOCAL DISPLACEMENTS

Job Setup

steel-2segment SkyCiv Report

SkyCiv Structural 3D v7.2.8
Licence Number: 1TgQdZH4tY4w7B6tTe9n93aY
Date: Wed 10 Jun 2026, 02:28PM (GMT-04:00)
Analysis Type: LINEAR STATIC ANALYSIS

File Name	steel-2segment
Job Name	Empty
Designer	Empty
Job Description	Empty

Length Units	ft
Section Length Units	in
Force Units	kip
Moment and Torsion Units	kip-ft
Pressure Units	psf
Material Strength Units	psi
Material Density Units	lb/ft ³
Mass Units	kip
Temperature Units	degF
Translation Units	in
Stress Units	psi
Nodes	4
Members	3
Plates	0
Meshed Plates	0
Supports	2
Sections	11
Point Loads	1
Distributed Loads	0
Moments	0
Member Prestress Loads	0
Thermal Loads	0
Pressures	0
Area Loads	0
Self Weight	OFF
User Defined Nodal Masses	0
Auto Defined Nodal Masses	0
Spectral Loads	0
Auto-Stabilize Model	NO
Member Evaluation Points	9
Extrapolate Plate Results From Gauss Points	YES
General Constraint	RRRRRR
Total Degrees of Freedom	17

NODE COORDINATES (ft)

ID	X Coordinate	Y Coordinate	Z Coordinate
1	0.000	0.000	0.000
2	16.667	0.000	0.000
3	33.333	0.000	0.000
4	50.000	0.000	0.000

MEMBERS (deg, ft, in, ft, kip)

F=Fixed, R=Released, S=Spring

ID	Node A	Node B	Length	Type	Section ID	Rotation Angle	Node A Fixity	Node B Fixity
1	1	2	16.667	Continuous & Normal	10	0.000	FFFFFF	FFFFFF
2	3	4	16.667	Continuous & Normal	10	0.000	FFFFFF	FFFFFF
3	2	3	16.667	Continuous & Normal	11	0.000	FFFFFF	FFFFFF

ID	Node A Offsets	Node B Offsets	Offset Axis	Node A Rot Stiff Y	Node A Rot Stiff Z	Node B Rot Stiff Y	Node B Rot Stiff Z	Cable Length	T/C Limit	Mirror	Disable Non-Linear
1	0, 0, 0	0, 0, 0	Local	-	-	-	-	-	-	No	No
2	0, 0, 0	0, 0, 0	Local	-	-	-	-	-	-	No	No
3	0, 0, 0	0, 0, 0	Local	-	-	-	-	-	-	No	No

SUPPORTS (kip/ft, kip-ft/rad)

F=Fixed, R=Released, S=Spring

B=Both Axes Restraint, N=Negative-Axis Restraint Only, P=Positive-Axis Restraint Only

ID	Node ID	Restraint Code	Direction Code	X Trans Stiffness	Y Trans Stiffness	Z Trans Stiffness	X Rot Stiffness	Y Rot Stiffness	Z Rot Stiffness	Source
1	1	FFFFFR	BBBBBB	-	-	-	-	-	-	User Defined Nodal Support
2	4	RFFRRR	BBBBBB	-	-	-	-	-	-	User Defined Nodal Support

MATERIALS (psi, lb/ft³, 10⁻⁶/degF)

Shear Modulus is used for members only.
Ex, Ey, Gxy, Gxz, Gyz are used for orthotropic plates only.

ID	Name	Young's Modulus	Shear Modulus	Density	Poisson's Ratio	Thermal Exp. Coeff.	Young's Modulus x	Young's Modulus y	Shear Modulus xy	Shear Modulus xz	Shear Modulus yz	Poisson's Ratio xy
1	American Standard (ASTM) - ASTM A36 Structural Carbon Steel - Standard	29000000.000	Auto	490.752	0.260	6.670	-	-	-	-	-	Auto

SECTIONS (in, in², in⁴, deg)

ID	Name	Shape	Material ID	Depth	Width	Shear Area z (STRESS)	Shear Area y (STRESS)	Shear Area z (TIMO)	Shear Area y (TIMO)	Torsion Radius
1	HSS5x5x3/16	HSS5x5x3/16	4	5.000	5.000	1.416	1.416	-	-	3.464
2	W12x14	W12x14	3	11.900	3.970	1.631	2.286	-	-	0.404
3	W14x22	W14x22	3	13.700	5.000	3.022	3.055	-	-	0.557
4	16 x 16	Rectangular	5	16.000	16.000	213.334	213.334	-	-	10.798
5	24 x 16	Rectangular	5	24.000	16.000	320.002	320.000	-	-	13.553
6	3 x 3	Hollow Rectangular	1	3.000	3.000	1.207	1.207	-	-	1.896
7	4 x 4	Rectangular	9	3.500	3.500	10.208	10.208	-	-	2.362
8	4 x 2	Rectangular	9	3.500	1.500	4.375	4.375	-	-	1.437
9	6 x 2	Rectangular	9	5.500	1.500	6.876	6.875	-	-	1.492
10	W14x61	W14x61	1	13.900	10.000	11.277	4.990	-	-	0.991
11	W14x90	W14x90	1	14.000	14.500	17.741	5.702	-	-	1.055

ID	Centroid y	Centroid z	Area (A)	y-Axis Mol (Iy)	z-Axis Mol (Iz)	Torsion Constant (J)	Principal Angle	Non Prismatic
1	2.500	2.500	3.280	12.600	12.600	19.900	0.000	N
2	5.950	1.985	4.160	2.360	88.600	0.070	0.000	N
3	6.850	2.500	6.490	7.000	199.000	0.208	0.000	N
4	8.000	8.000	256.000	5461.333	5461.333	9213.015	0.000	N
5	12.000	8.000	384.000	8192.000	18432.000	19244.519	0.000	N
6	1.500	1.500	2.750	3.495	3.495	5.449	0.000	N
7	1.750	1.750	12.250	12.505	12.505	21.096	0.000	N
8	1.750	0.750	5.250	0.984	5.359	2.875	0.000	N
9	2.750	0.750	8.250	1.547	20.797	5.124	0.000	N
10	6.950	5.000	17.900	107.000	640.000	2.190	0.000	N
11	7.000	7.250	26.500	362.000	999.000	4.060	0.000	N

ID	Area Red. Factor	Iy Red. Factor	Iz Red. Factor	Torsion Constant Red. Factor	Shear Area Y Red. Factor	Shear Area Z Red. Factor
1	-	-	-	-	-	-
2	-	-	-	-	-	-
3	-	-	-	-	-	-
4	-	-	-	-	-	-
5	-	-	-	-	-	-
6	-	-	-	-	-	-
7	-	-	-	-	-	-
8	-	-	-	-	-	-
9	-	-	-	-	-	-
10	-	-	-	-	-	-
11	-	-	-	-	-	-

POINT LOADS (kip)

ID	Load Group	Node	Member	Position (%)	X Magnitude	Y Magnitude	Z Magnitude
1	D1	2			0.000	-5.000	0.000

LOAD COMBINATIONS

ID	Name	Criteria	D1 Factor
1	1: 1.40D1 + 1.40SW1	Strength	1.400
2	2: 1.20D1 + 1.20SW1 + 1.60L1	Strength	1.200
3	4: 1.20D1 + 1.20SW1 + 1.60L1 + 0.30S1	Strength	1.200
4	9: 1.20D1 + 1.20SW1 + 1.00S1	Strength	1.200
5	10: 1.20D1 + 1.20SW1 + 1.00S1 + 1.00L1	Strength	1.200
6	11: 1.20D1 + 1.20SW1 + 1.00S1 + 0.50W1	Strength	1.200
7	15: 1.20D1 + 1.20SW1 + 1.00L1 + 1.00W1	Strength	1.200
8	17: 1.20D1 + 1.20SW1 + 1.00L1 + 1.00W1 + 0.30S1	Strength	1.200
9	23: 1.20D1 + 1.20SW1 + 1.00W1	Strength	1.200
10	28: 0.90D1 + 0.90SW1	Strength	0.900
11	29: 0.90D1 + 0.90SW1 + 1.60L1	Strength	0.900
12	31: 0.90D1 + 0.90SW1 + 1.60L1 + 0.30S1	Strength	0.900
13	36: 0.90D1 + 0.90SW1 + 1.00S1	Strength	0.900
14	37: 0.90D1 + 0.90SW1 + 1.00S1 + 1.00L1	Strength	0.900
15	38: 0.90D1 + 0.90SW1 + 1.00S1 + 0.50W1	Strength	0.900
16	42: 0.90D1 + 0.90SW1 + 1.00L1 + 1.00W1	Strength	0.900
17	44: 0.90D1 + 0.90SW1 + 1.00L1 + 1.00W1 + 0.30S1	Strength	0.900
18	50: 0.90D1 + 0.90SW1 + 1.00W1	Strength	0.900

LOAD CASES

Design Code: ASCE-7-2022-LRFD

Load Group	Design Load Case
D1	D

Bill of Materials

BILL OF MATERIALS FOR MEMBERS (ft, kip)

Section	Material	Quantity	Unit Length	Total Length	Unit Mass	Total Mass
10: W14x61	1: American Standard (ASTM) - ASTM A36 - Structural Carbon Steel - Standard	1	16.667	16.667	1.017	1.017
10: W14x61	1: American Standard (ASTM) - ASTM A36 - Structural Carbon Steel - Standard	1	16.667	16.667	1.017	1.017
11: W14x90	1: American Standard (ASTM) - ASTM A36 - Structural Carbon Steel - Standard	1	16.667	16.667	1.505	1.505
						3.539

SKYCIV FREE TRIAL EDITION

FREE TRIAL EDITION

Nodal Results

Load Case: D
= D1

NODE REACTIONS (kip, kip-ft)

Support ID	Node	X Force	Y Force	Z Force	X Moment	Y Moment	Z Moment
1	1	0.000	3.333	0.000	0.000	0.000	0.000
2	4	0.000	1.667	0.000	0.000	0.000	0.000
Reaction Sum		0.000	5.000	0.000			
Load Sum		0.000	-5.000	0.000			
Equilibrium		0.000	0.000	0.000			

MEMBER END FORCES AND MOMENTS (kip, kip-ft)

Member	Node	Axial Force	Y Shear	Z Shear	X Torsion	Y Moment	Z Moment
1	1	0.000	3.333	0.000	0.000	0.000	0.000
	2	0.000	3.333	0.000	0.000	0.000	55.556
2	3	0.000	-1.667	0.000	0.000	0.000	27.778
	4	0.000	-1.667	0.000	0.000	0.000	0.000
3	2	0.000	-1.667	0.000	0.000	0.000	55.556
	3	0.000	-1.667	0.000	0.000	0.000	27.778

NODAL DISPLACEMENTS (in)

Node	X Translation	Y Translation	Z Translation	Total Translation
1	0.000	0.000	0.000	0.000
2	0.000	-0.757	0.000	0.757
3	0.000	-0.652	0.000	0.652
4	0.000	0.000	0.000	0.000

Load Group: D1

NODE REACTIONS (kip, kip-ft)

Support ID	Node	X Force	Y Force	Z Force	X Moment	Y Moment	Z Moment
1	1	0.000	3.333	0.000	0.000	0.000	0.000
2	4	0.000	1.667	0.000	0.000	0.000	0.000
Reaction Sum		0.000	5.000	0.000			
Load Sum		0.000	-5.000	0.000			
Equilibrium		0.000	0.000	0.000			

MEMBER END FORCES AND MOMENTS (kip, kip-ft)

Member	Node	Axial Force	Y Shear	Z Shear	X Torsion	Y Moment	Z Moment
1	1	0.000	3.333	0.000	0.000	0.000	0.000
	2	0.000	3.333	0.000	0.000	0.000	55.556
2	3	0.000	-1.667	0.000	0.000	0.000	27.778
	4	0.000	-1.667	0.000	0.000	0.000	0.000
3	2	0.000	-1.667	0.000	0.000	0.000	55.556
	3	0.000	-1.667	0.000	0.000	0.000	27.778

NODAL DISPLACEMENTS (in)

Node	X Translation	Y Translation	Z Translation	Total Translation
1	0.000	0.000	0.000	0.000
2	0.000	-0.757	0.000	0.757
3	0.000	-0.652	0.000	0.652
4	0.000	0.000	0.000	0.000

Member Results

Load Case: D
= D1

INTERNAL MEMBER FORCES AND MOMENTS (ft, kip, kip-ft)

 = Maximum value of a result in the member/plate.
 = Minimum value of a result in the member/plate.

Member	Section	Station Location	Axial Force	Y Shear	Z Shear	X Torsion	Y Moment	Z Moment
1	10	0.000	0.000	3.333	0.000	0.000	0.000	0.000
1	10	2.083	0.000	3.333	0.000	0.000	0.000	6.944
1	10	4.167	0.000	3.333	0.000	0.000	0.000	13.889
1	10	6.250	0.000	3.333	0.000	0.000	0.000	20.833
1	10	8.333	0.000	3.333	0.000	0.000	0.000	27.778
1	10	10.417	0.000	3.333	0.000	0.000	0.000	34.722
1	10	12.500	0.000	3.333	0.000	0.000	0.000	41.667
1	10	14.583	0.000	3.333	0.000	0.000	0.000	48.611
1	10	16.667	0.000	3.333	0.000	0.000	0.000	55.556
2	10	0.000	0.000	-1.667	0.000	0.000	0.000	27.778
2	10	2.083	0.000	-1.667	0.000	0.000	0.000	24.306
2	10	4.167	0.000	-1.667	0.000	0.000	0.000	20.833
2	10	6.250	0.000	-1.667	0.000	0.000	0.000	17.361
2	10	8.333	0.000	-1.667	0.000	0.000	0.000	13.889
2	10	10.417	0.000	-1.667	0.000	0.000	0.000	10.417
2	10	12.500	0.000	-1.667	0.000	0.000	0.000	6.944
2	10	14.583	0.000	-1.667	0.000	0.000	0.000	3.472
2	10	16.667	0.000	-1.667	0.000	0.000	0.000	0.000
3	11	0.000	0.000	-1.667	0.000	0.000	0.000	55.556
3	11	2.083	0.000	-1.667	0.000	0.000	0.000	52.083
3	11	4.167	0.000	-1.667	0.000	0.000	0.000	48.611
3	11	6.250	0.000	-1.667	0.000	0.000	0.000	45.139
3	11	8.333	0.000	-1.667	0.000	0.000	0.000	41.667
3	11	10.417	0.000	-1.667	0.000	0.000	0.000	38.194
3	11	12.500	0.000	-1.667	0.000	0.000	0.000	34.722
3	11	14.583	0.000	-1.667	0.000	0.000	0.000	31.250
3	11	16.667	0.000	-1.667	0.000	0.000	0.000	27.778

GROUPS SUMMARY - INTERNAL MEMBER FORCES AND MOMENTS (kip, kip-ft)

Group Name	Type	Axial Force	Y Shear	Z Shear	X Torsion	Y Moment	Z Moment
N/A							

MEMBER DISPLACEMENTS (ft, in, rad)

Maximum value of a result in the member/plate.
Minimum value of a result in the member/plate.

Member	Station Location	Global X Translation	Global Y Translation	Global Z Translation	Total Translation	Global X Rotation	Global Y Rotation	Global Z Rotation
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	-0.005
1	2.083	0.000	-0.124	0.000	0.124	0.000	0.000	-0.005
1	4.167	0.000	-0.245	0.000	0.245	0.000	0.000	-0.005
1	6.250	0.000	-0.361	0.000	0.361	0.000	0.000	-0.004
1	8.333	0.000	-0.468	0.000	0.468	0.000	0.000	-0.004
1	10.417	0.000	-0.564	0.000	0.564	0.000	0.000	-0.004
1	12.500	0.000	-0.646	0.000	0.646	0.000	0.000	-0.003
1	14.583	0.000	-0.712	0.000	0.712	0.000	0.000	-0.002
1	16.667	0.000	-0.757	0.000	0.757	0.000	0.000	-0.001
2	0.000	0.000	-0.652	0.000	0.652	0.000	0.000	0.002
2	2.083	0.000	-0.595	0.000	0.595	0.000	0.000	0.002
2	4.167	0.000	-0.528	0.000	0.528	0.000	0.000	0.003
2	6.250	0.000	-0.453	0.000	0.453	0.000	0.000	0.003
2	8.333	0.000	-0.371	0.000	0.371	0.000	0.000	0.003
2	10.417	0.000	-0.283	0.000	0.283	0.000	0.000	0.004
2	12.500	0.000	-0.191	0.000	0.191	0.000	0.000	0.004
2	14.583	0.000	-0.096	0.000	0.096	0.000	0.000	0.004
2	16.667	0.000	0.000	0.000	0.000	0.000	0.000	0.004
3	0.000	0.000	-0.757	0.000	0.757	0.000	0.000	-0.001
3	2.083	0.000	-0.785	0.000	0.785	0.000	0.000	-0.001
3	4.167	0.000	-0.799	0.000	0.799	0.000	0.000	-0.000
3	6.250	0.000	-0.801	0.000	0.801	0.000	0.000	0.000
3	8.333	0.000	-0.791	0.000	0.791	0.000	0.000	0.001
3	10.417	0.000	-0.770	0.000	0.770	0.000	0.000	0.001
3	12.500	0.000	-0.739	0.000	0.739	0.000	0.000	0.001
3	14.583	0.000	-0.699	0.000	0.699	0.000	0.000	0.002
3	16.667	0.000	-0.652	0.000	0.652	0.000	0.000	0.002

MEMBER LOCAL DISPLACEMENTS (ft, in, rad)

Maximum value of a result in the member/plate.
Minimum value of a result in the member/plate.

Member	Station Location	Local X Translation	Local Y Translation	Local Z Translation	Local X Rotation	Local Y Rotation	Local Z Rotation
1	0.000	0.000	0.000	0.000	0.000	0.000	-0.005
1	2.083	0.000	-0.124	0.000	0.000	0.000	-0.005
1	4.167	0.000	-0.245	0.000	0.000	0.000	-0.005
1	6.250	0.000	-0.361	0.000	0.000	0.000	-0.004
1	8.333	0.000	-0.468	0.000	0.000	0.000	-0.004
1	10.417	0.000	-0.564	0.000	0.000	0.000	-0.004
1	12.500	0.000	-0.646	0.000	0.000	0.000	-0.003
1	14.583	0.000	-0.712	0.000	0.000	0.000	-0.002
1	16.667	0.000	-0.757	0.000	0.000	0.000	-0.001
2	0.000	0.000	-0.652	0.000	0.000	0.000	0.002
2	2.083	0.000	-0.595	0.000	0.000	0.000	0.002
2	4.167	0.000	-0.528	0.000	0.000	0.000	0.003
2	6.250	0.000	-0.453	0.000	0.000	0.000	0.003
2	8.333	0.000	-0.371	0.000	0.000	0.000	0.003
2	10.417	0.000	-0.283	0.000	0.000	0.000	0.004
2	12.500	0.000	-0.191	0.000	0.000	0.000	0.004
2	14.583	0.000	-0.096	0.000	0.000	0.000	0.004
2	16.667	0.000	0.000	0.000	0.000	0.000	0.004
3	0.000	0.000	-0.757	0.000	0.000	0.000	-0.001
3	2.083	0.000	-0.785	0.000	0.000	0.000	-0.001
3	4.167	0.000	-0.799	0.000	0.000	0.000	-0.000
3	6.250	0.000	-0.801	0.000	0.000	0.000	0.000
3	8.333	0.000	-0.791	0.000	0.000	0.000	0.001
3	10.417	0.000	-0.770	0.000	0.000	0.000	0.001
3	12.500	0.000	-0.739	0.000	0.000	0.000	0.001
3	14.583	0.000	-0.699	0.000	0.000	0.000	0.002
3	16.667	0.000	-0.652	0.000	0.000	0.000	0.002

Load Group: D1

INTERNAL MEMBER FORCES AND MOMENTS (ft, kip, kip-ft)

Maximum value of a result in the member/plate.
Minimum value of a result in the member/plate.

Member	Section	Station Location	Axial Force	Y Shear	Z Shear	X Torsion	Y Moment	Z Moment
1	10	0.000	0.000	3.333	0.000	0.000	0.000	0.000
1	10	2.083	0.000	3.333	0.000	0.000	0.000	6.944
1	10	4.167	0.000	3.333	0.000	0.000	0.000	13.889
1	10	6.250	0.000	3.333	0.000	0.000	0.000	20.833
1	10	8.333	0.000	3.333	0.000	0.000	0.000	27.778
1	10	10.417	0.000	3.333	0.000	0.000	0.000	34.722
1	10	12.500	0.000	3.333	0.000	0.000	0.000	41.667
1	10	14.583	0.000	3.333	0.000	0.000	0.000	48.611
1	10	16.667	0.000	3.333	0.000	0.000	0.000	55.556
2	10	0.000	0.000	-1.667	0.000	0.000	0.000	27.778
2	10	2.083	0.000	-1.667	0.000	0.000	0.000	24.306
2	10	4.167	0.000	-1.667	0.000	0.000	0.000	20.833
2	10	6.250	0.000	-1.667	0.000	0.000	0.000	17.361
2	10	8.333	0.000	-1.667	0.000	0.000	0.000	13.889
2	10	10.417	0.000	-1.667	0.000	0.000	0.000	10.417
2	10	12.500	0.000	-1.667	0.000	0.000	0.000	6.944
2	10	14.583	0.000	-1.667	0.000	0.000	0.000	3.472
2	10	16.667	0.000	-1.667	0.000	0.000	0.000	0.000
3	11	0.000	0.000	-1.667	0.000	0.000	0.000	55.556
3	11	2.083	0.000	-1.667	0.000	0.000	0.000	52.083
3	11	4.167	0.000	-1.667	0.000	0.000	0.000	48.611
3	11	6.250	0.000	-1.667	0.000	0.000	0.000	45.139
3	11	8.333	0.000	-1.667	0.000	0.000	0.000	41.667
3	11	10.417	0.000	-1.667	0.000	0.000	0.000	38.194
3	11	12.500	0.000	-1.667	0.000	0.000	0.000	34.722
3	11	14.583	0.000	-1.667	0.000	0.000	0.000	31.250
3	11	16.667	0.000	-1.667	0.000	0.000	0.000	27.778

GROUPS SUMMARY - INTERNAL MEMBER FORCES AND MOMENTS (kip, kip-ft)

Group Name	Type	Axial Force	Y Shear	Z Shear	X Torsion	Y Moment	Z Moment
N/A							

MEMBER DISPLACEMENTS (ft, in, rad)

Maximum value of a result in the member/plate.
Minimum value of a result in the member/plate.

Member	Station Location	Global X Translation	Global Y Translation	Global Z Translation	Total Translation	Global X Rotation	Global Y Rotation	Global Z Rotation
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	-0.005
1	2.083	0.000	-0.124	0.000	0.124	0.000	0.000	-0.005
1	4.167	0.000	-0.245	0.000	0.245	0.000	0.000	-0.005
1	6.250	0.000	-0.361	0.000	0.361	0.000	0.000	-0.004
1	8.333	0.000	-0.468	0.000	0.468	0.000	0.000	-0.004
1	10.417	0.000	-0.564	0.000	0.564	0.000	0.000	-0.004
1	12.500	0.000	-0.646	0.000	0.646	0.000	0.000	-0.003
1	14.583	0.000	-0.712	0.000	0.712	0.000	0.000	-0.002
1	16.667	0.000	-0.757	0.000	0.757	0.000	0.000	-0.001
2	0.000	0.000	-0.652	0.000	0.652	0.000	0.000	0.002
2	2.083	0.000	-0.595	0.000	0.595	0.000	0.000	0.002
2	4.167	0.000	-0.528	0.000	0.528	0.000	0.000	0.003
2	6.250	0.000	-0.453	0.000	0.453	0.000	0.000	0.003
2	8.333	0.000	-0.371	0.000	0.371	0.000	0.000	0.003
2	10.417	0.000	-0.283	0.000	0.283	0.000	0.000	0.004
2	12.500	0.000	-0.191	0.000	0.191	0.000	0.000	0.004
2	14.583	0.000	-0.096	0.000	0.096	0.000	0.000	0.004
2	16.667	0.000	0.000	0.000	0.000	0.000	0.000	0.004
3	0.000	0.000	-0.757	0.000	0.757	0.000	0.000	-0.001
3	2.083	0.000	-0.785	0.000	0.785	0.000	0.000	-0.001
3	4.167	0.000	-0.799	0.000	0.799	0.000	0.000	-0.000
3	6.250	0.000	-0.801	0.000	0.801	0.000	0.000	0.000
3	8.333	0.000	-0.791	0.000	0.791	0.000	0.000	0.001
3	10.417	0.000	-0.770	0.000	0.770	0.000	0.000	0.001
3	12.500	0.000	-0.739	0.000	0.739	0.000	0.000	0.001
3	14.583	0.000	-0.699	0.000	0.699	0.000	0.000	0.002
3	16.667	0.000	-0.652	0.000	0.652	0.000	0.000	0.002

MEMBER LOCAL DISPLACEMENTS (ft, in, rad)

 = Maximum value of a result in the member/plate.
 = Minimum value of a result in the member/plate.

Member	Station Location	Local X Translation	Local Y Translation	Local Z Translation	Local X Rotation	Local Y Rotation	Local Z Rotation
1	0.000	0.000	0.000	0.000	0.000	0.000	-0.005
1	2.083	0.000	-0.124	0.000	0.000	0.000	-0.005
1	4.167	0.000	-0.245	0.000	0.000	0.000	-0.005
1	6.250	0.000	-0.361	0.000	0.000	0.000	-0.004
1	8.333	0.000	-0.468	0.000	0.000	0.000	-0.004
1	10.417	0.000	-0.564	0.000	0.000	0.000	-0.004
1	12.500	0.000	-0.646	0.000	0.000	0.000	-0.003
1	14.583	0.000	-0.712	0.000	0.000	0.000	-0.002
1	16.667	0.000	-0.757	0.000	0.000	0.000	-0.001
2	0.000	0.000	-0.652	0.000	0.000	0.000	0.002
2	2.083	0.000	-0.595	0.000	0.000	0.000	0.002
2	4.167	0.000	-0.528	0.000	0.000	0.000	0.003
2	6.250	0.000	-0.453	0.000	0.000	0.000	0.003
2	8.333	0.000	-0.371	0.000	0.000	0.000	0.003
2	10.417	0.000	-0.283	0.000	0.000	0.000	0.004
2	12.500	0.000	-0.191	0.000	0.000	0.000	0.004
2	14.583	0.000	-0.096	0.000	0.000	0.000	0.004
2	16.667	0.000	0.000	0.000	0.000	0.000	0.004
3	0.000	0.000	-0.757	0.000	0.000	0.000	-0.001
3	2.083	0.000	-0.785	0.000	0.000	0.000	-0.001
3	4.167	0.000	-0.799	0.000	0.000	0.000	-0.000
3	6.250	0.000	-0.801	0.000	0.000	0.000	0.000
3	8.333	0.000	-0.791	0.000	0.000	0.000	0.001
3	10.417	0.000	-0.770	0.000	0.000	0.000	0.001
3	12.500	0.000	-0.739	0.000	0.000	0.000	0.001
3	14.583	0.000	-0.699	0.000	0.000	0.000	0.002
3	16.667	0.000	-0.652	0.000	0.000	0.000	0.002