

A

B

C

D

E

料号: PH40876A-R2×XX-XX
P/N.

REV	ECN	MARK	DESCRIPTION	DATE

SPECIFICATIONS

Rated Current : 1.5AMP
Contact Resistance: 20mΩ Max
Withstanding Voltage: 500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature: -40° to +105°


STANDARD: PA6T

Contact Material: Brass
Insulator Material: Polyester (UL 94V-0)
Contact Plating: Au or Sn Over Ni
Max Processing Temp: 230 °C for 30-60seconds
(260°C for 10 seconds)




Ordering Information

PH4087 6 A - R 2 × ** - **
① ②③ ④⑤ ⑥ ⑦

- ①: PH4087: Series NO
②: 6: Right angle DIP Type
③: A: Plug
④: R: RoHS
⑤: 2: Double Row
⑥: PIN POS: 01:2POS ~ 40:80POS
⑦: Plating: 01:Gold Flash 02:1u" Gold 03:1.5u" Gold
04:2u" Gold 05:3u" Gold 06:5u" Gold
07:10U" Gold 08:15U" Gold 09:Tin

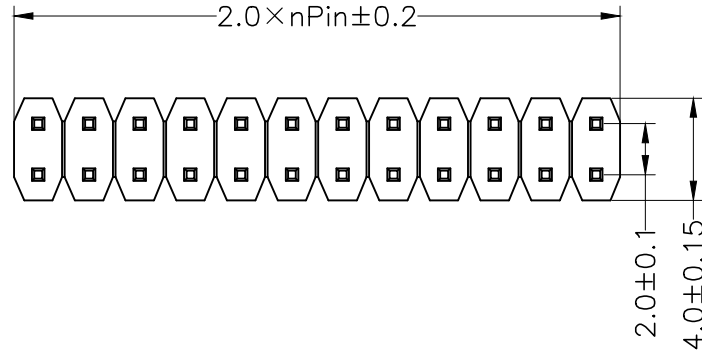

Dimension Antitheses List				
ITEM	PA	PC	H	L
Standard	3.9	2.8	2.0	8.7

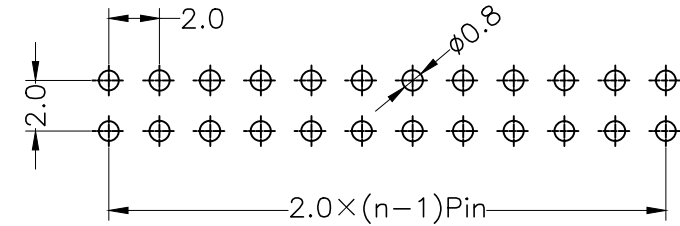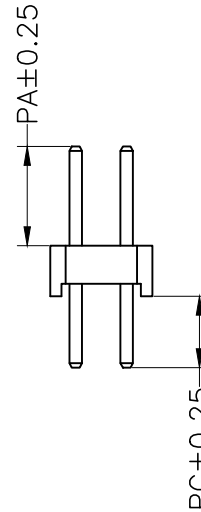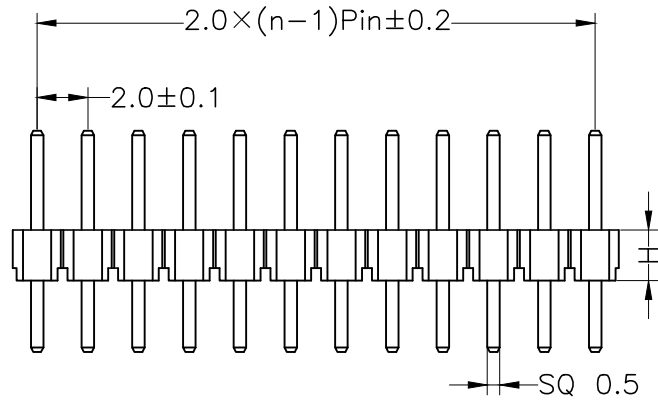

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

PD.011.0029
PH40876A-R2*15-01

比例 SCALE	单位 UNIT	一般公差 GENERAL TOLERANCE	投影法 PROJECTION METHOD	绘图 DR.	校图 CHK.	核准 APPD.	版本: REV.	品名: PH2.0Pitch 2XnPin TITLE H2.0 180° DIP
N/A	mm	*** ± 0.05 ± 0.5° ** ± 0.10 ± 1° * ± 0.20 ± 2° ± 0.30 ± 5°		ZHOU BING 2012.03.30	FU LONG 2012.03.30	YANG BINGQIANG 2012.03.30	页码: PAGE 1 of 1	料号: P/N. PH40876A-R2×XX-XX