


SERIES AM-50T
AIR AMPLIFIERS

ACCESSORIES
AIR AMPLIFIERS

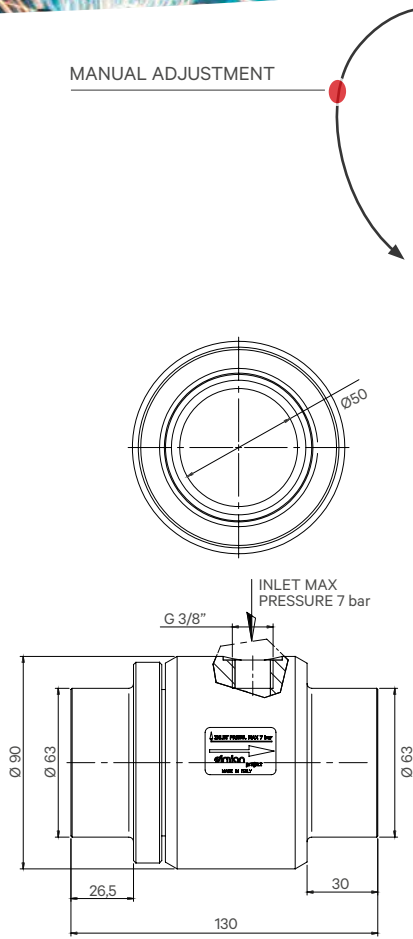

GENERAL FEATURES - AM-50T	
Materials	Aluminium
Air inlet port	G-3/8
Inlet diameter	Ø 63
Outlet diameter	Ø 63
Air supply pressure	max 7 bar
Recommended hose	Ø 12x1 - Ø 14x1
Weight	950 g

PERFORMANCES AND CONSUMPTION TABLE

OPENING 90°					
SUPPLY PRESSURE bar	CONSUMPTION NI/min	FLOW-RATE NI/min	AMPLIFICATION RATIO	VACUUM mbar	NOISE LEVEL dBA
2	900	2700	3,0	0	-
3	1100	3300	3,0	0	-
4	1300	3800	2,9	0	-
5	1470	4250	2,9	0	-
6	1650	4700	2,8	25	-
APERTURA 180°					
2	1450	3700	2,6	0	-
3	1700	4500	2,6	19	-
4	1950	5300	2,7	36	-
5	2200	5900	2,7	55	-
6	2450	6500	2,7	75	-





STRAIGHT PUSH-IN FITTING FOR AIR SUPPLY			
Part Number	Hose Ø	Thread	Air amplifier
S6510	6	1/8"	AM10-T
S6510	8	1/8"	AM10-T / AM15-T
S6510	10	1/8"	AM15-T
S6510	8	1/4"	AM20-T
S6510	10	1/4"	AM20-T / AM25-T / AM30-T
S6510	12	1/4"	AM25-T / AM30-T
S6510	12	3/8"	AM40-T / AM50-T
S6510	14	3/8"	AM40-T / AM50-T



ELBOW PUSH-IN FITTING FOR AIR SUPPLY			
Part Number	Hose Ø	Thread	Air amplifier
S6520	6	1/8"	AM10-T
S6520	8	1/8"	AM10-T / AM15-T
S6520	10	1/8"	AM15-T
S6520	8	1/4"	AM20-T
S6520	10	1/4"	AM20-T / AM25-T / AM30-T
S6520	12	1/4"	AM25-T / AM30-T
S6520	12	3/8"	AM40-T / AM50-T
S6520	14	3/8"	AM40-T / AM50-T



FIXATION BRACKET	
Part Number	Air amplifier
ABT-05T	AM-10T / AM-15T
ABT-05	AM-20T / AM-25T
On request, with fixation holes*.	

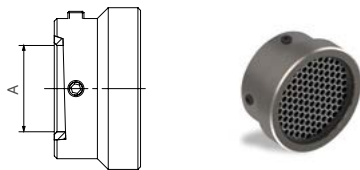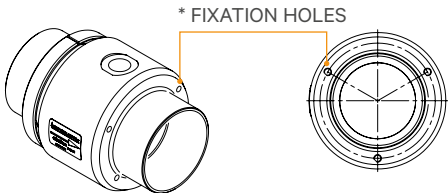

FILTERS FOR FIXATION TO CABINETS		
Part Number	Air amplifier	A Ø
AC32	AM-10T / AM-15T	19
AC31	AM-20T / AM-25T	32
AC26	AM-30T	38
AC43	AM-40T	50
AC44	AM-50T	63