

SERIES UGP 45A - UGP 45B

FLAT-FLOW NOZZLES



SERIES UGL



NOZZLE FOR RECTANGULAR PHOTOCELLS




UGP 45A



UGP 45B

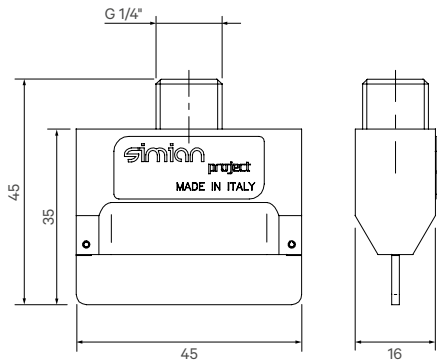

UGP 45A

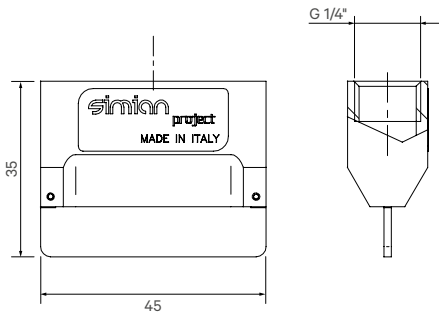

UGP 45B



GENERAL FEATURES - UGP 45A - UGP 45B

Material	Delrin and AISI304 s.s.
Inlet port	G 1/4" M (UGP 45A) G 1/4" F (UGP 45B)
Flow width	45 mm
Supply pressure	1 ÷ 7 bar
Weight	32 g (UGP 45A) 25 g (UGP 45B)

PERFORMANCES AND CONSUMPTION TABLE

PRESSURE bar	AIR CONSUMPTION NL/min	THRUST* Grams	NOISE LEVEL dBA
1	130	80	65
2	231	180	70
3	340	290	73
4	436	410	77
5	540	550	80
6	650	700	82
7	780	850	83

*Thrust force (in grams) measured at a distance of 200 mm.

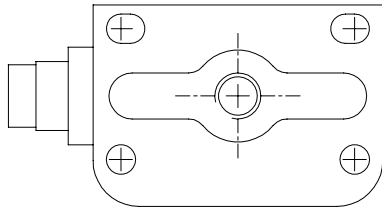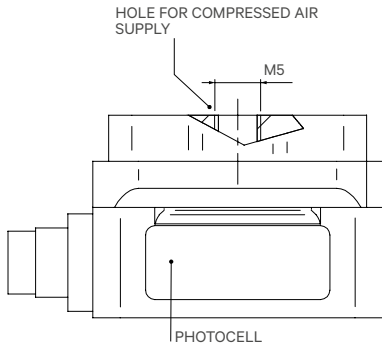

GENERAL FEATURES - UGL

Material	On request
Inlet port	Not included
Dimensions	On request

PERFORMANCES AND CONSUMPTION TABLE

PRESSURE bar	CONSUMPTION NL/MIN
0,2	13