


SPECIAL APPLICATIONS

AIR-SPEED 25 • SUCTION GUN

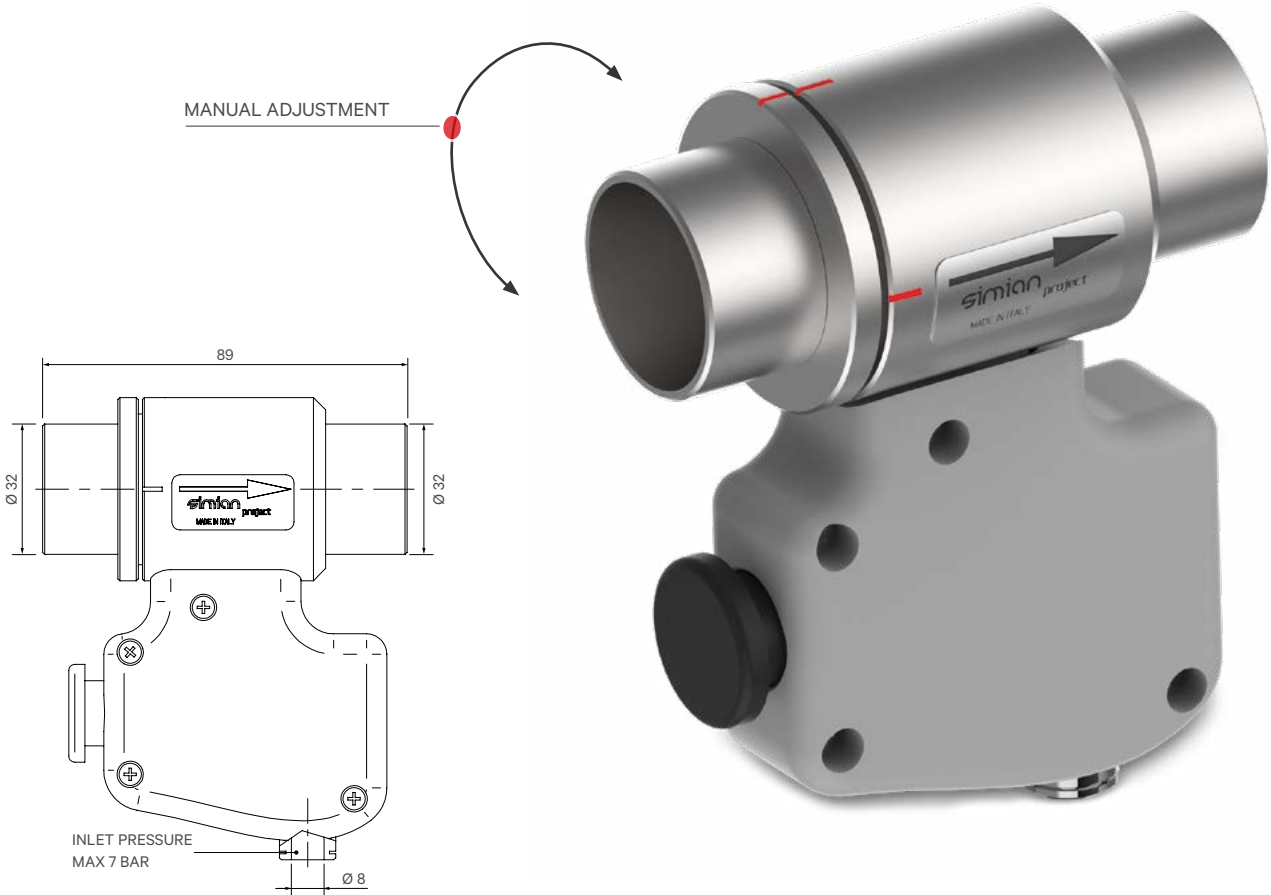

GENERAL FEATURES - AIR-SPEED 25

Materials	Aluminium
Supply connection	Ø 8 x 1
Inlet diameter	Ø 32
Outlet diameter	Ø 32
Air supply pressure	max 7 bar

On request, available in version for blowing.

SPECIAL APPLICATIONS

AIRCLEAN 30

FUNCTIONING PRINCIPLE
By opening the rear ball valve, the compressed air activates the **AM-30T** amplifier (recommended pressure: 3 - 5 bar), whose amplified and powerful flow gets out from the tapered outlet. The handle has length 1 m.

- BENEFITS**
- Manageability and robustness, as it is made of aluminium.
 - Reduction of consumption, thanks to the air amplifier.
 - High power of the air flow.



FIELDS OF USE

- Cleaning of large conveyor belts (waste sector, mining sector, etc.);
- Cleaning of hoppers in the construction industry, etc.;
- Cleaning of large components in the aeronautic, rail, and marine sectors;
- Cleaning of silos, metallic carpentry, etc.