


STAND-ALONE SERIES VR-400U-XTRONIC

ELECTRONICALLY-CONTROLLED PNEUMATIC COOLERS



GENERAL FEATURES - VR-400U XTRONIC	
Power supply	24 V DC
Recommended hose	Ø 8x1
Supply pressure	max 7 bar
Cooling power and performances	See VR-400U (page 16)
Probe length	1 m
Temperature range	-20°C +60°C
Humidity range	00% 100% RH
Accuracy	0.1°C , 0.1 % RH
Current capacity	max 10 A
Coil voltage and power	24 V - 3.1 W
Electric wires' section	0.75 mm
Weight	845 g

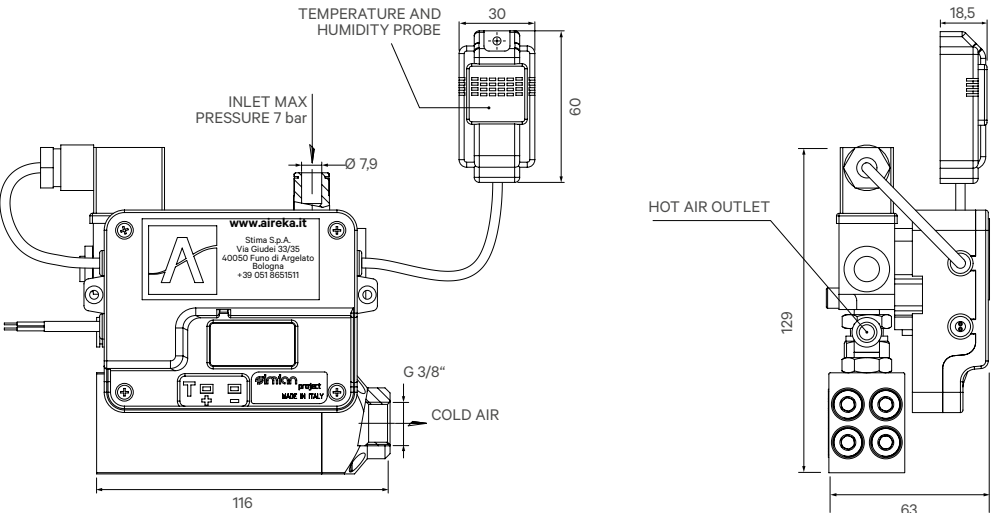

STAND-ALONE SERIES VRX-500 XTRONIC

ELECTRONICALLY-CONTROLLED PNEUMATIC COOLERS



GENERAL FEATURES - VRX-500 XTRONIC	
Supply voltage	24 V DC
Recommended hose	Ø 10x1
Supply pressure	max 7 bar
Cooling power and performances	See VR-400U (pag. 23)
Probe length	1 mt
Temperature range	-20°C +60°C
Humidity range	00% 100% RH
Accuracy	0.1°C , 0.1 % RH
Current capacity	max 10 A
Coil voltage and power	24 V - 3.1 W
Electric wires' section	0.75 mm
Weight	1430 g

