## MVHB-260 series

#### HAND LEVER VALVE








### **Specification**


Model	MVHB-260(V)-4TV MVHB-260(V)-4TV-SP	MVHB-260(V)-4TV* MVHB-260(V)-4TV*-SP
Bore No.	8A	
Port size	Rc1/4	
No. of port	5	
No.of position	2	3
Medium	Air	
Operating pressure range	0~0.8 MPa	
Effective orifice	18 mm²	
Ambient temperature	-5~+60°C (No freezing)	
Weight	219 g	278 g


#### Order example

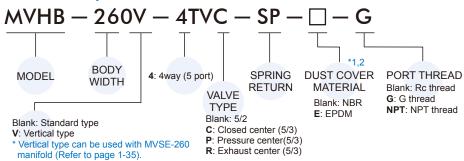


R: Exhaust center (5/3)

- \*1. NBR: Good oil resistance and abrasion resistance, not suitable for using in polar solvents.
  - EPDM: Excellent water resistance and chemical resistance, not suitable for using oil place.
- \*2. Suitability of material please refer to page 2-3~5.

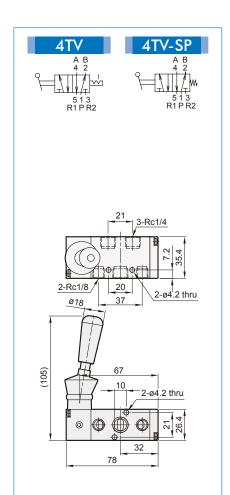

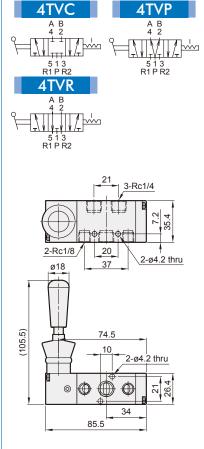

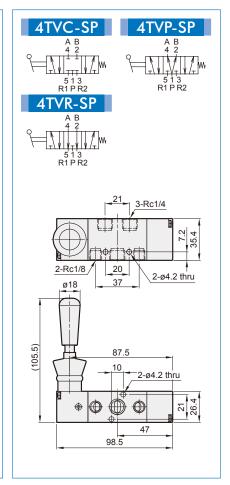



# MVHB-260 Dimensions – Vertical type



#### HAND LEVER VALVE

