
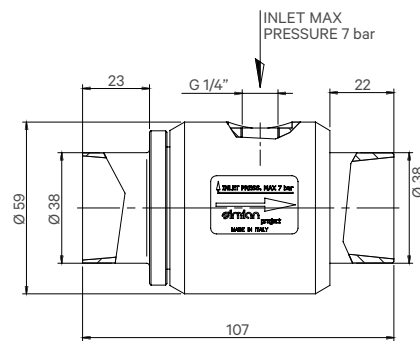



SERIES AM-30T
AIR AMPLIFIERS



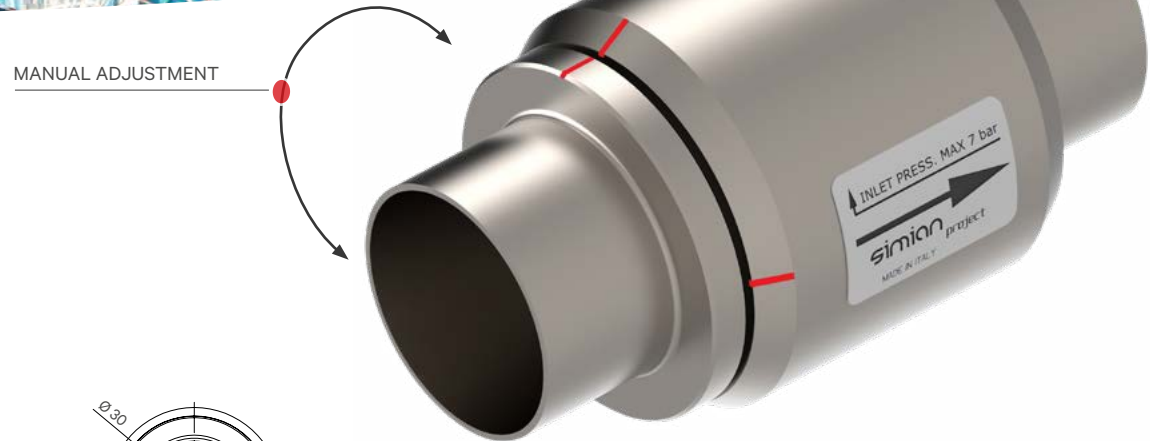


GENERAL FEATURES - AM-30T	
Materials	Aluminium
Air inlet port	G-1/4
Inlet diameter	Ø 38
Outlet diameter	Ø 38
Air supply pressure	max 7 bar
Recommended hose	Ø 10x1 - Ø 12x1
Weight	380 g

PERFORMANCES AND CONSUMPTION TABLE

OPENING 90°					
SUPPLY PRESSURE bar	CONSUMPTION NI/min	FLOW-RATE NI/min	AMPLIFICATION RATIO	VACUUM mbar	NOISE LEVEL dBA
2	333	3415	10,2	15	80
3	483	4081,7	8,5	24	82
4	610	4581,5	7,5	32	84
5	730	4998	6,8	41	86
6	833	5497,8	6,6	50	88
OPENING 180°					
2	766	4165	5,4	40	84
3	1116	4998	4,5	52	88
4	1416	5664,4	4,0	65	91
5	1790	6414	3,6	80	93
6	2200	6830,6	3,1	100	94

SERIES AM-40T
AIR AMPLIFIERS

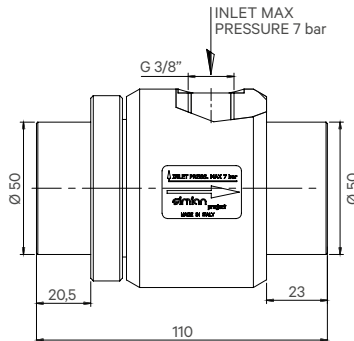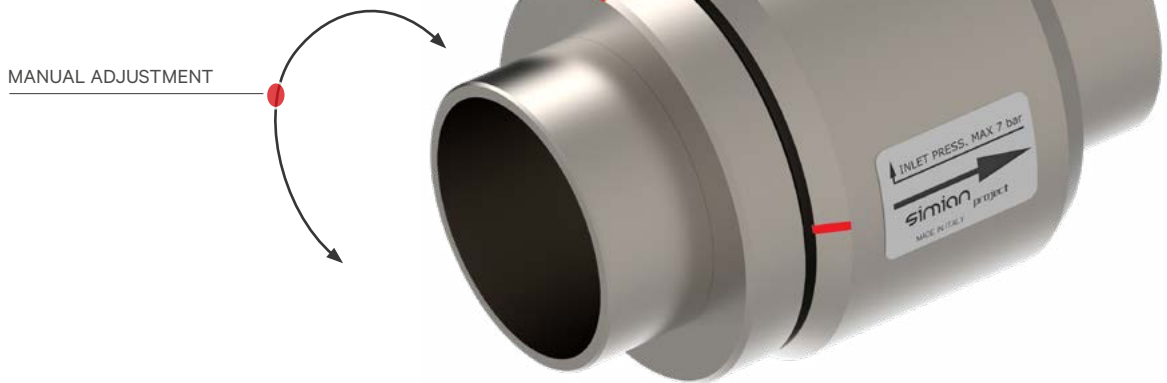

GENERAL FEATURES - AM-40T	
Materials	Aluminium
Air inlet port	G-3/8
Inlet diameter	Ø 50
Outlet diameter	Ø 50
Air supply pressure	max 7 bar
Recommended hose	Ø 12x1 - Ø 14x1
Weight	600 g

PERFORMANCES AND CONSUMPTION TABLE

OPENING 90°					
SUPPLY PRESSURE bar	CONSUMPTION NI/min	FLOW-RATE NI/min	AMPLIFICATION RATIO	VACUUM mbar	NOISE LEVEL dBA
2	483	3332	6,9	12	80
3	660	4248	6,4	20	83
4	850	4998	5,9	25	85
5	1025	5831	5,7	30	87
6	1210	6297	5,2	35	89
OPENING 180°					
2	1082	4998	4,6	28	87
3	1566	5831	3,7	38	91
4	2082	6580	3,2	50	93
5	2600	7663	2,9	63	95
6	3048	8663	2,8	75	97