


SERIES VR-300T • 3 OUTLETS  
MODULAR PNEUMATIC COOLERS

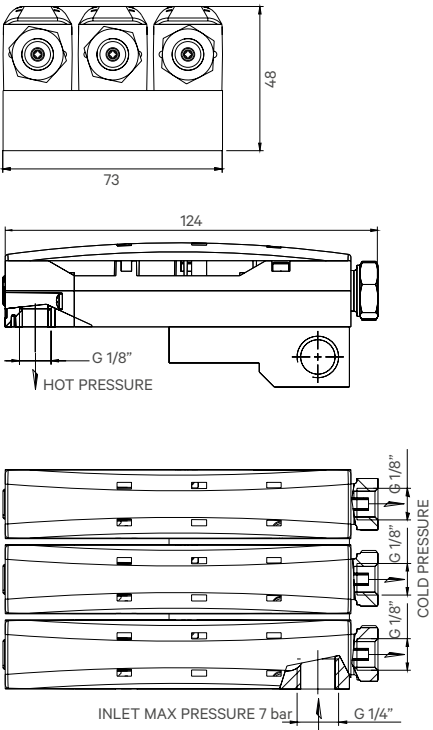

GENERAL FEATURES - VR-300T


Materials	Body and cover: Nylon 6.6
	Air connections and nozzles: brass
Air inlet port	G-1/4" F
Outlet port (cold flow)	3 x G-1/8" F
Exhaust port (hot flow)	3 x G-1/8" F
Recommended hose	Ø-8x1
Air supply pressure	1 ÷ 7 bar
Cooling power*	360 W - 300 Kcal/h - 1200 BTUH
Optional magnetic support	KACM-VR300

\*with inlet pressure 7 Bar and inlet temperature 20°C

PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

Pressure bar	Outlet temperature cold flow °C	Consumption NL/min
1	-1,5	96
2	-8	159
3	-15	222
4	-21,5	282
5	-24,5	345
6	-26,5	405
7	-28	462

SERIES VR-300U • SINGLE OUTLET  
MODULAR PNEUMATIC COOLERS

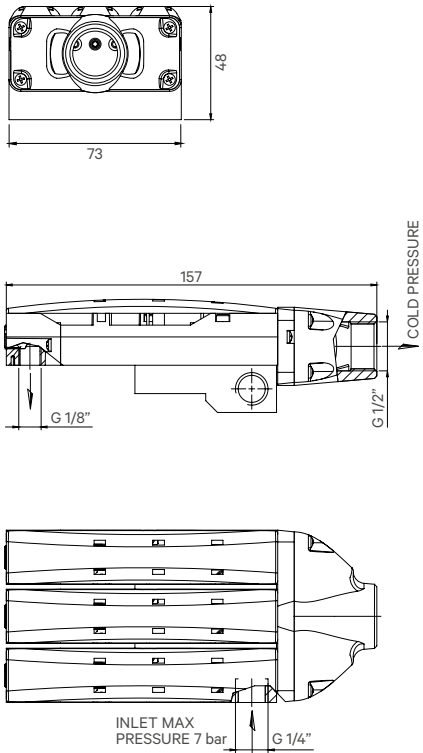

GENERAL FEATURES - VR-300U

Materials	Body and cover: Nylon 6.6
	Air connections and nozzles: brass
Air inlet port	G-1/4" F
Outlet port (cold flow)	1 x G-1/2" F
Exhaust port (hot flow)	3 x G-1/8" F
Recommended hose	Ø-8x1
Air supply pressure	3 ÷ 7 bar
Cooling power*	360 W - 300 Kcal/h - 1200 BTUH
Optional magnetic support	KACM-VR300

\*with inlet pressure 7 Bar and inlet temperature 20°C

PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

Pressure bar	Outlet temperature cold flow °C	Consumption NL/min
1	-1,5	96
2	-8	159
3	-15	222
4	-21,5	282
5	-24,5	345
6	-26,5	405
7	-28	462