

CONTROL UNITS XTRONIC2

1 / 2 / 3 SOLENOID VALVES



CONTROL UNIT XTRONIC2 C EV-1S/C




DESCRIPTION

Control box featuring:


1. Switch for automatic/manual operation
2. Solenoid valve
3. Electronic kit with 7-segment display
4. Temperature probe and safety fuses (high-temperature kit available on request).

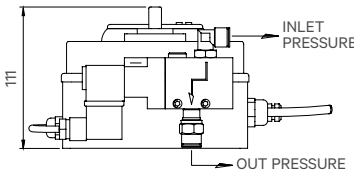

XTRONIC2 C-EV-1S/C
1 SOLENOID VALVE



XTRONIC2 C-2EV-1S/C
2 SOLENOID VALVES

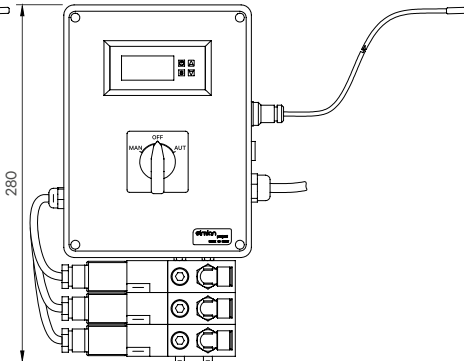

XTRONIC2 C-3EV-1S/C
3 SOLENOID VALVES

CONTROL UNITS XTRONIC 345 B

PNEUMATIC COOLERS



GENERAL FEATURES - XTRONIC 345 B

Supply voltage	24 V DC
Probe length	1 m
Temperature range	-20°C +60°C
Humidity range	00% 100% RH
Accuracy	0.1°C , 0.1 % RH
Current capacity	max 10 A
Coil voltage and power	24 V - 3.1 W
Electric wires' section	0.75 mm
Supply cable length	1.5 m
Application	Inside cabinets

