





HAHN oil dampers are used for slowing down moving weights.

- Oil dampers are closed, maintenance-free hydraulic elements which are used for the smooth slowing of feed units, linear drive units, flaps, etc.

Fixed dampers work in extension, compression or in both directions and can hold up from 5N to 2500N. All fixed dampers are available in different sizes in steel and stainless steel AISI 303/304 and AISI 316L/316Ti.

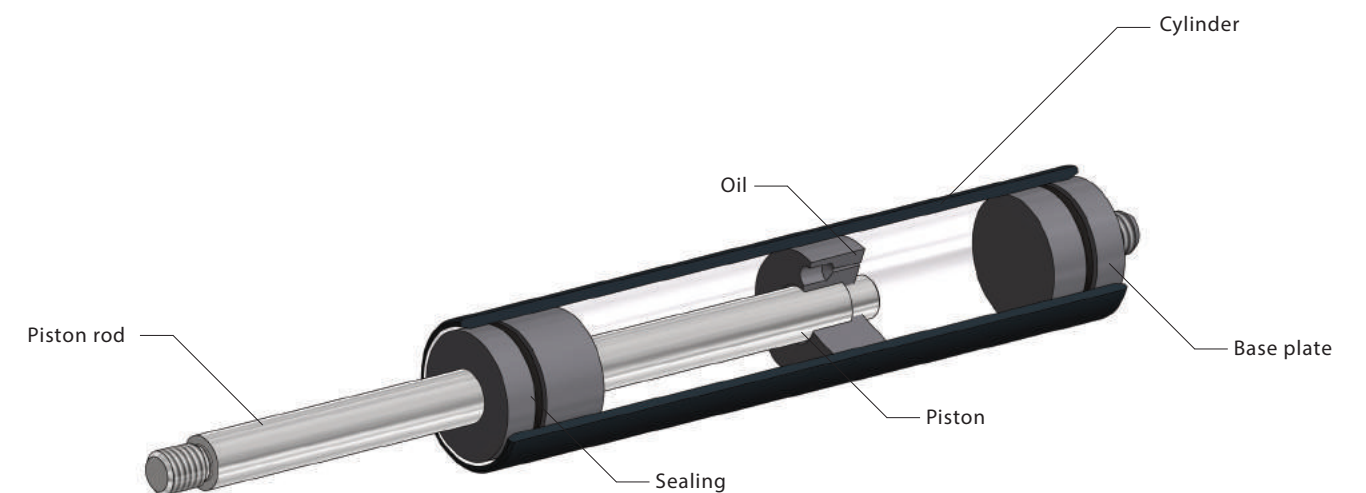

- The adjustable dampers (HB dampers) can be used on both sides or on one side. The ready-to-install and closed Systems provide a constant feed rate and are adjustable. Decisive here is the setting segment on the piston, which makes adjustment more easy.

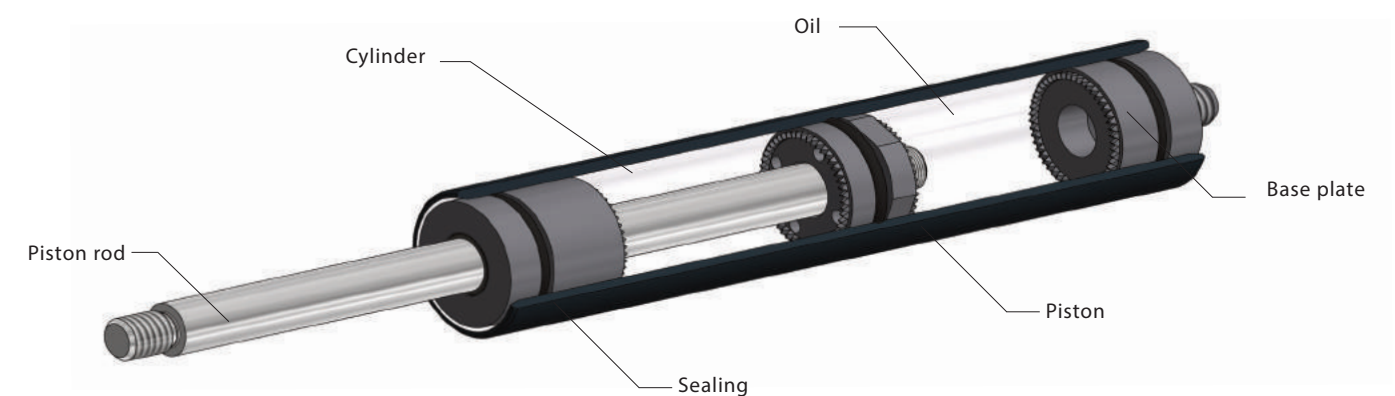

Oil dampers



Standard product range

Type	Ø Rod	Ø Cylinder	Stroke	Standard length	Damping force	Damping
D 04-12	4 mm	12 mm	10 - 200 mm	2 x stroke + 32	5 - 100 N	comp./ext./both-way
D 06-19	6 mm	19 mm	20 - 300 mm	2 x stroke + 35	40 - 400 N	comp./ext./both-way
D 08-23	8 mm	23 mm	40 - 500 mm	2 x stroke + 40	50 - 800 N	comp./ext./both-way
D 10-28	10 mm	28 mm	40 - 500 mm	2 x stroke + 45	120 - 1200 N	comp./ext./both-way
D 14-40	14 mm	40 mm	50 - 600 mm	2 x stroke + 60	400 - 2500 N	comp./ext./both-way

Thread rod	Thread cylinder	Extras	Steel	AISI 303/304	AISI 316L/316Ti
M 3.5	M 3.5	-	•	-	o. r.
M 5	M 5	6, 7	•	•	•
M 8	M 8	6, 7	•	•	o. r.
M 8	M 8	6, 7	•	•	o. r.
M 10	M 10	1, 6, 7	•	•	•