
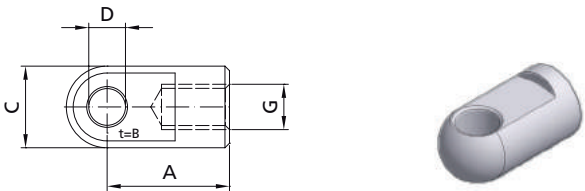


Fittings


With a broad range of fittings, brackets and special accessories, the application options for HAHN gas springs can be combined and extended in every possible way:

- Various fittings such as fork heads, hinged eyelets, hinged joints etc. are suitable for all mounting applications in combination with the matching brackets for the product. Depending on the individual case, HAHN supplies a variety of different fittings so that customers can select the respectively best solutions from this intelligent modular system.

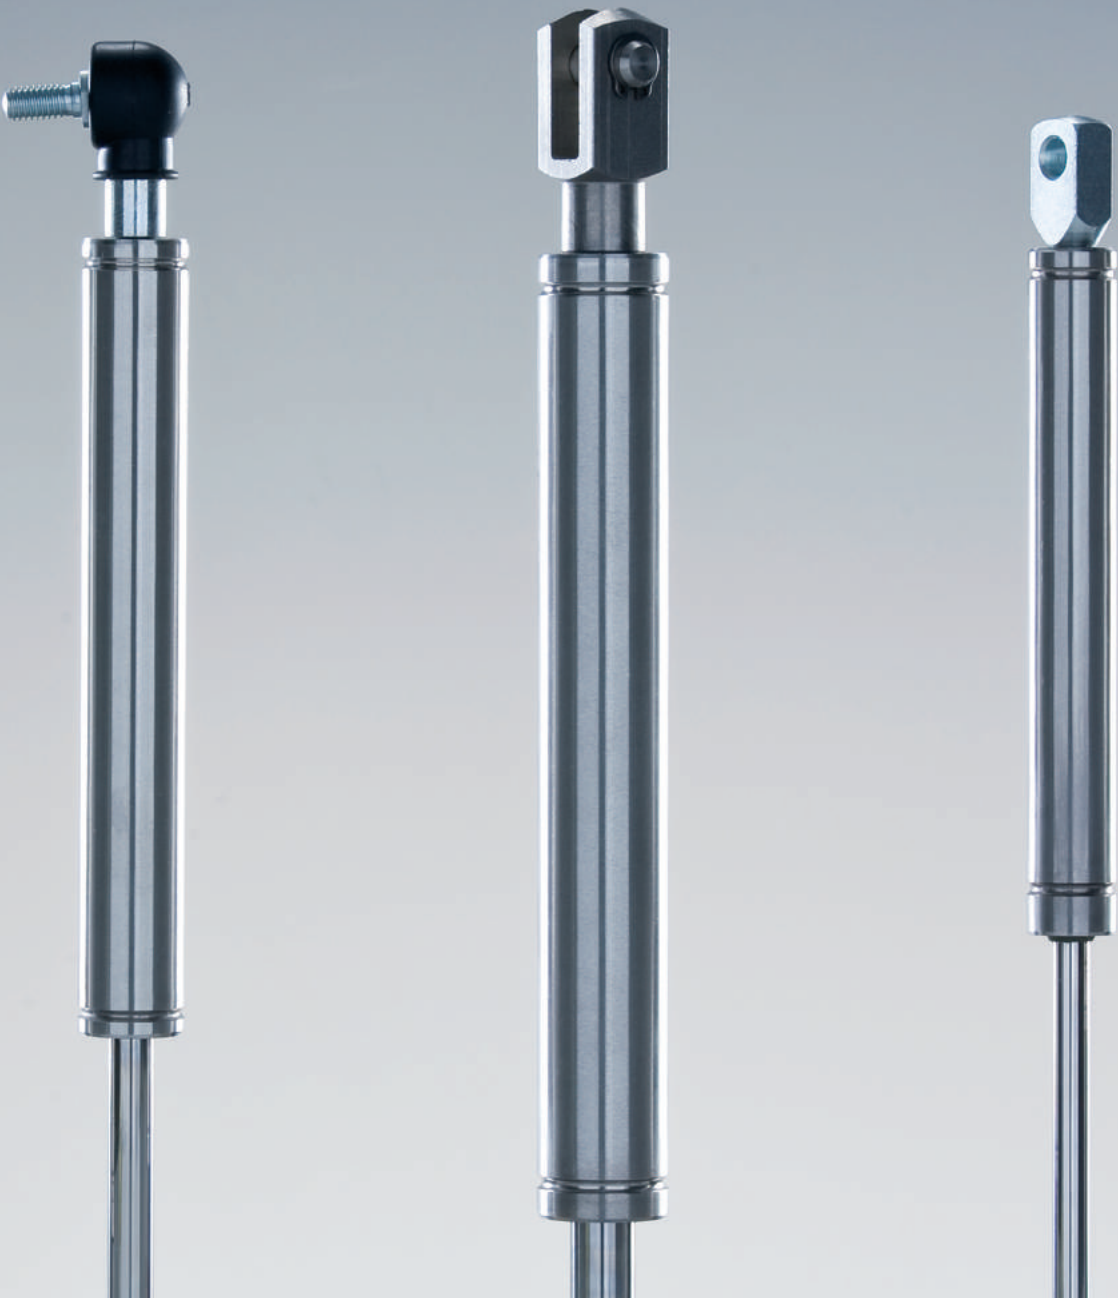

Eyelets


Type	Thread (G)	Installation length (A)	Thickness (B)	Width (C)	Cross hole Ø (D)	Steel	AISI 303/304	AISI 316L/316Ti	Plastic
AU 08	M 2	8 mm	2,5 mm	4 mm	2.1 mm	•	-	-	-
AU 11	M 3.5	12 mm	4 mm	8 mm	4.1 mm	•	-	-	-
AS 20	M 5	20 mm	3 mm	12 mm	6.1 mm	•	•	-	-
AU 16	M 5	16 mm	6 mm	10 mm	6.1 mm	•	•	•	-
AR 16	M 5	16 mm	10 mm	15 mm	8.1 mm	•	-	-	-
AX 16	M 5	16 mm	3 mm	10 mm	6,1 mm	•	-	-	-
AK 17	M 8	17 mm	14 mm	14 mm	8.1 mm	-	-	-	•
AK 21	M 8	21 mm	18 mm	18 mm	8.1 mm	-	-	-	•
AR 16	M 8	16 mm	10 mm	15 mm	8.1 mm	•	-	-	-
AR 19	M 8	19 mm	10 mm	15 mm	8.1 mm	•	-	-	-
AR 19	M 8	19 mm	10 mm	15 mm	10.1 mm	•	-	-	-
AR 27	M 8	27 mm	10 mm	15 mm	8.1 mm	•	-	-	-
AS 19	M 8	19 mm	8 mm	14 mm	8.1 mm	•	-	-	-
AS 24	M 8	24 mm	6 mm	14 mm	8.1 mm	•	-	-	-
AS 30	M 8	30 mm	5 mm	18 mm	8.1 mm	•	-	-	-
AU 19	M 8	19 mm	10 mm	14 mm	8.1 mm	•	•	•	-
AU 19	M 8	19 mm	10 mm	14 mm	6.1 mm	•	-	-	-
AX 24	M 8	24 mm	5 mm	14 mm	8,1 mm	•	-	-	-
AK 21	M 10	21 mm	18 mm	18 mm	8.1 mm	-	-	-	•
AS 27	M 10	27 mm	14 mm	18 mm	8.1 mm	•	-	-	-
AU 27	M 10	27 mm	10 mm	18 mm	8.1 mm	•	•	•	-
AU 27	M 10	27 mm	10 mm	18 mm	10.1 mm	•	•	•	-
AU 42	M 14 x 1.5	42 mm	14 mm	25 mm	14.1 mm	•	•	•	-

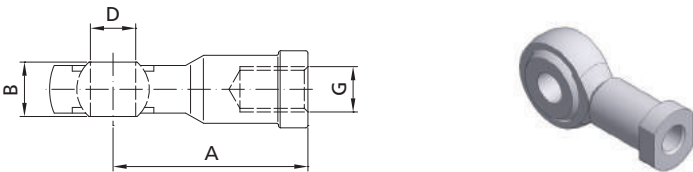

Hinged joints


Type	Thread (G)	Installation length (A)	Thickness (B)	Width	Cross hole Ø (D)	Steel	AISI 303/304	AISI 316L/316Ti	Plastic
AG 12	M 2	12.5 mm	4 mm	-	2 mm	-	-	-	•
AG 27	M 5	27 mm	8 mm	9 mm	5 mm	•	•	o. r.	-
AG 36	M 8	36 mm	12 mm	13 mm	8 mm	•	•	o. r.	-
AG 43	M 10	43 mm	14 mm	17 mm	10 mm	•	•	o. r.	-
AG 57	M 14 x 1.5	57 mm	19 mm	22 mm	14 mm	•	•	o. r.	-

Fittings

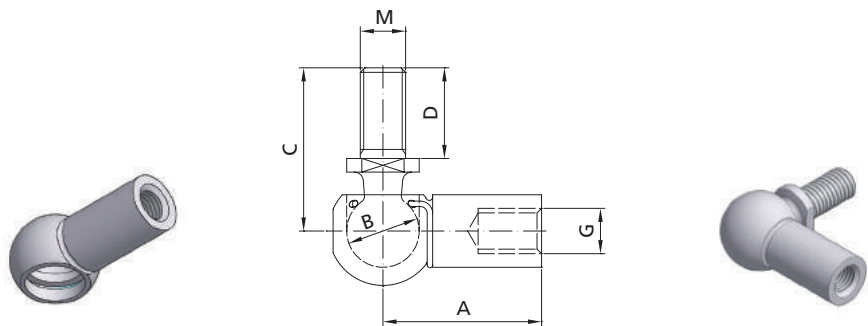


Ball joints and sockets

Type	Thread (G)	Installation length (A)	Socket diameter (B)	Bolt length (C)	Thread (MxD)	Steel	AISI 303/304	AISI 316L/316Ti
PF 12	M 2	12.5 mm	4 mm	12.5 mm	-	•	-	-
WG 12	M 2	12.5 mm	4 mm	12.5 mm	M 2 x 7.5	•	-	-
PX 18	M 3.5	18 mm	8 mm	-	-	•	-	-
WX 18	M 3.5	18 mm	8 mm	19 mm	M 4 x 10	•	-	-
PF 22	M 5	22 mm	8 mm	-	-	•	o. r.	o. r.
PX 22	M 5	22 mm	10 mm	-	-	•	-	-
WD 22	M 5	22 mm	10 mm	19 mm	M 8 x 12	•	-	-
WG 22	M 5	22 mm	8 mm	19 mm	M 5 x 10	•	•	•
WX 22	M 5	22 mm	10 mm	23 mm	M 8 x 12	•	•	-
WY 22	M 5	22 mm	10 mm	23 mm	M 6 x 12	•	-	-
PF 18	M 8	18 mm	10 mm	-	-	•	-	-
PF 30	M 8	30 mm	13 mm	-	-	•	o. r.	o. r.
WD 30	M 8	30 mm	13 mm	29 mm	M 8 x 16	•	-	-
WG 18	M 8	18 mm	10 mm	23 mm	M 8 x 12	•	•	-
WG 30	M 8	30 mm	13 mm	29 mm	M 8 x 16	•	•	•
WS 35	M 8	35 mm	16 mm	36 mm	M 10 x 20	•	-	-
WX 30	M 8	30 mm	13 mm	29 mm	M 10 x 16	•	-	-
PF 35	M 10	35 mm	16 mm	-	-	•	-	-
WG 35	M 10	35 mm	16 mm	36 mm	M 10 x 20	•	•	•
WG 45	M 14 x 1.5	45 mm	19 mm	48 mm	M 14 x 1,5 x 28	•	•	•

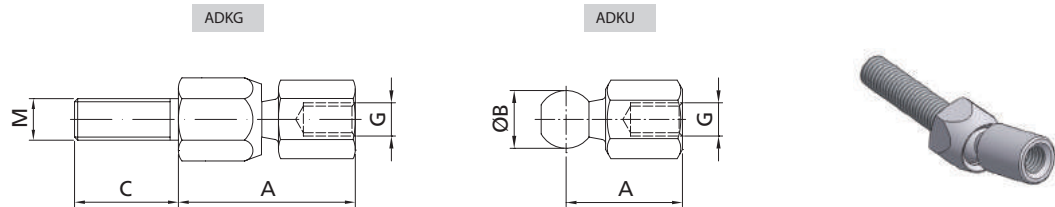


Axial joints

Type	Thread (G)	Installation length (A)	Ball diameter (B)	Bolt (MxC)	Steel	AISI 303/304	AISI 316L/316Ti
ADKG	M 5	28 mm	8 mm	M 8 x 35	•	-	-
ADKU	M 5	20 mm	8 mm	-	•	-	-
ADKG	M8	31 mm	10 mm	M 8 x 35	•	-	o. r.
ADKU	M 8	23 mm	10 mm	-	•	-	-
ADKG	M10	43 mm	14 mm	M 10 x 25	•	-	o. r.
ADKU	M 10	28 mm	14 mm	-	•	-	-
ADKG	M 14 x 1.5	56 mm	20 mm	M 14 x 1.5 x 40	•	-	-
ADKU	M 14 x 1.5	35 mm	20 mm	-	•	-	-

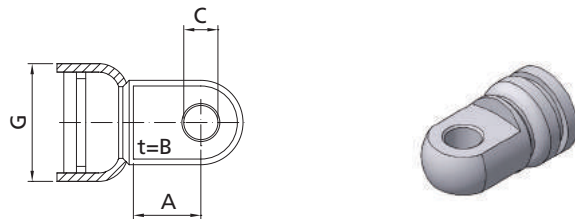

Base plate eyelet

Type	For cylinder Ø (G)	Installation length (A)	Thickness (B)	Cross hole Ø (C)	Steel	AISI 303/304	AISI 316L/316Ti
AB 04	6 mm	4 mm	2.5 mm	2.1 mm	•	-	-
AB 07	10 mm	7 mm	4 mm	4.1 mm	•	-	-
AB 07	12 mm	7 mm	4 mm	4.1 mm	•	-	-
AB 09	15 mm	9 mm	6 mm	6.1 mm	•	-	-
AT 09	15 mm	9 mm	3 mm	6,1 mm	•	-	-
AB 11	19 mm	11 mm	10 mm	6.1 mm	•	-	-
AB 11	19 mm	11 mm	10 mm	8.1 mm	•	-	-
AB 11	23 mm	11 mm	10 mm	8.1 mm	•	-	-
AT 11	19 mm	11mm	5 mm	8,1 mm	•	-	-
AB 11	23 mm	11 mm	10 mm	10.1 mm	•	-	-
AB 16	28 mm	16 mm	10 mm	8.1 mm	•	-	-
AB 16	28 mm	16 mm	10 mm	10.1 mm	•	-	-
AZ 20	40 mm	20 mm	14 mm	14.1 mm	•	•	-

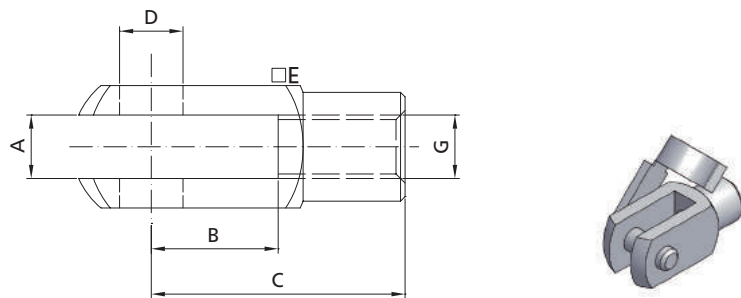

Forks

Type	Thread (G)	Size (A x B)	Installation length (C)	Width (E)	Bolt Ø (D)	Steel	AISI 303/304	AISI 316L/316Ti
GA16	M 3.5	4 x 8 mm	16 mm	8 mm	4 mm	•	-	-
GG 16*	M 3.5	4 x 8 mm	16 mm	8 mm	4 mm	•	-	-
GA 20	M 5	5 x 10 mm	20 mm	10 mm	5 mm	•	•	-
GG 20*	M 5	5 x 10 mm	20 mm	10 mm	5 mm	•	•	•
GA 32	M 8	8 x 16 mm	32 mm	16 mm	8 mm	•	•	-
GG 32*	M 8	8 x 16 mm	32 mm	16 mm	8 mm	•	•	•
GS 40	M 8	10 x 20 mm	40 mm	20 mm	10 mm	•	-	-
GA 40	M 10	10 x 20 mm	40 mm	20 mm	10 mm	•	•	-
GG 40*	M 10	10 x 20 mm	40 mm	20 mm	10 mm	•	•	•
GS 32	M 10	8 x 16 mm	32 mm	16 mm	8 mm	•	-	-
GX 32	M 10 x 1	8 x 16 mm	32 mm	16 mm	8 mm	•	-	-
GA 56	M 14 x 1.5	14 x 28 mm	56 mm	27 mm	14 mm	•	•	-
GG 56*	M 14 x 1.5	14 x 28 mm	56 mm	27 mm	14 mm	•	•	•
GA 80	M 20	20 x 40 mm	80 mm	40 mm	20 mm	•	-	-
GA 99	M 24	25 x 50 mm	99 mm	50 mm	25 mm	•	-	-

* Fork joint steel with ES-bolts, AISI 303/304 with Ben bolts, AISI 316L/316Ti with eyebolts.