



Lever releases for locking gas springs

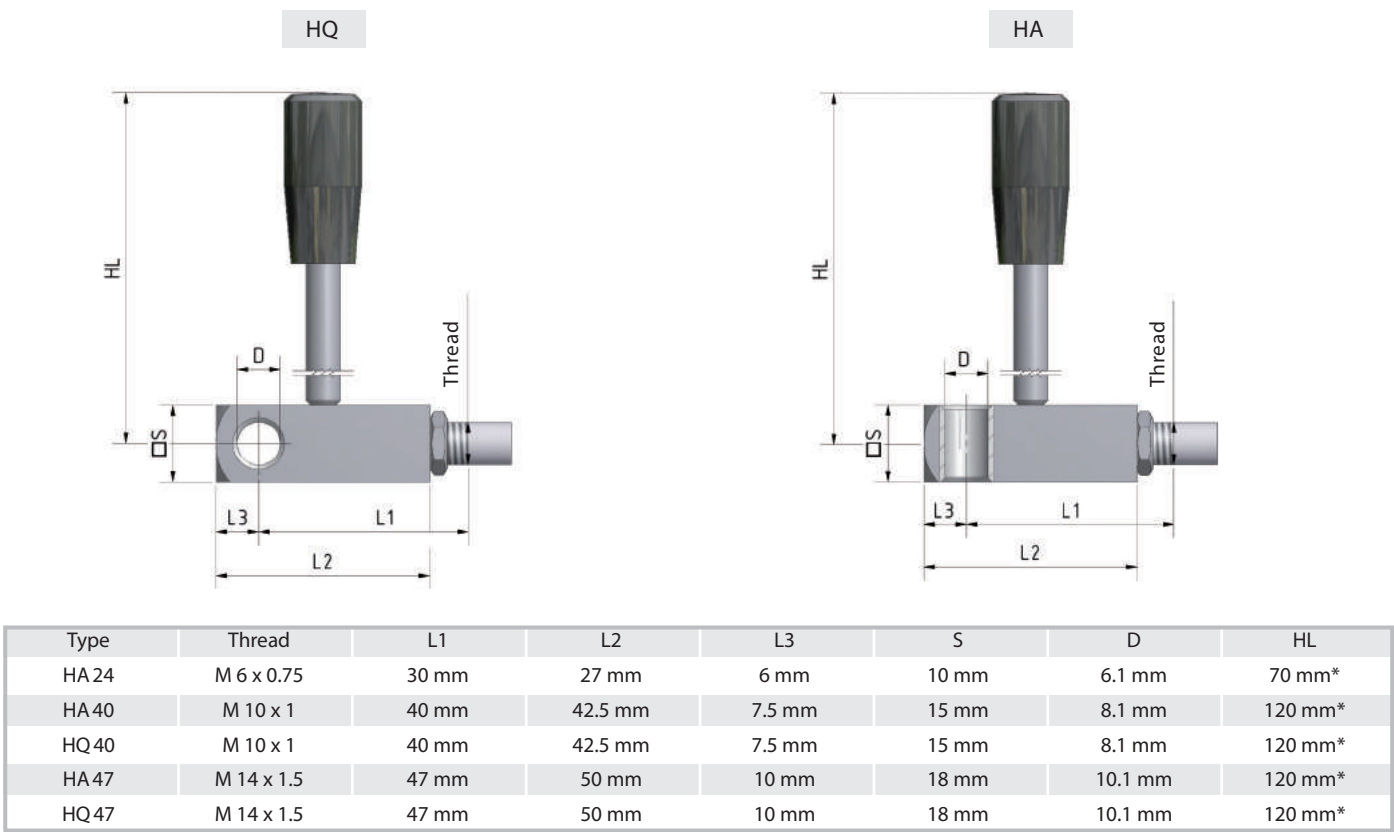

* Other lever lengths on request

Release head	Aluminium anodised
Operating lever	Steel zinc-plated (for HA24, lever is steel/black oxide)
Cylinder button	Plastic (HA24 without cylinder button)

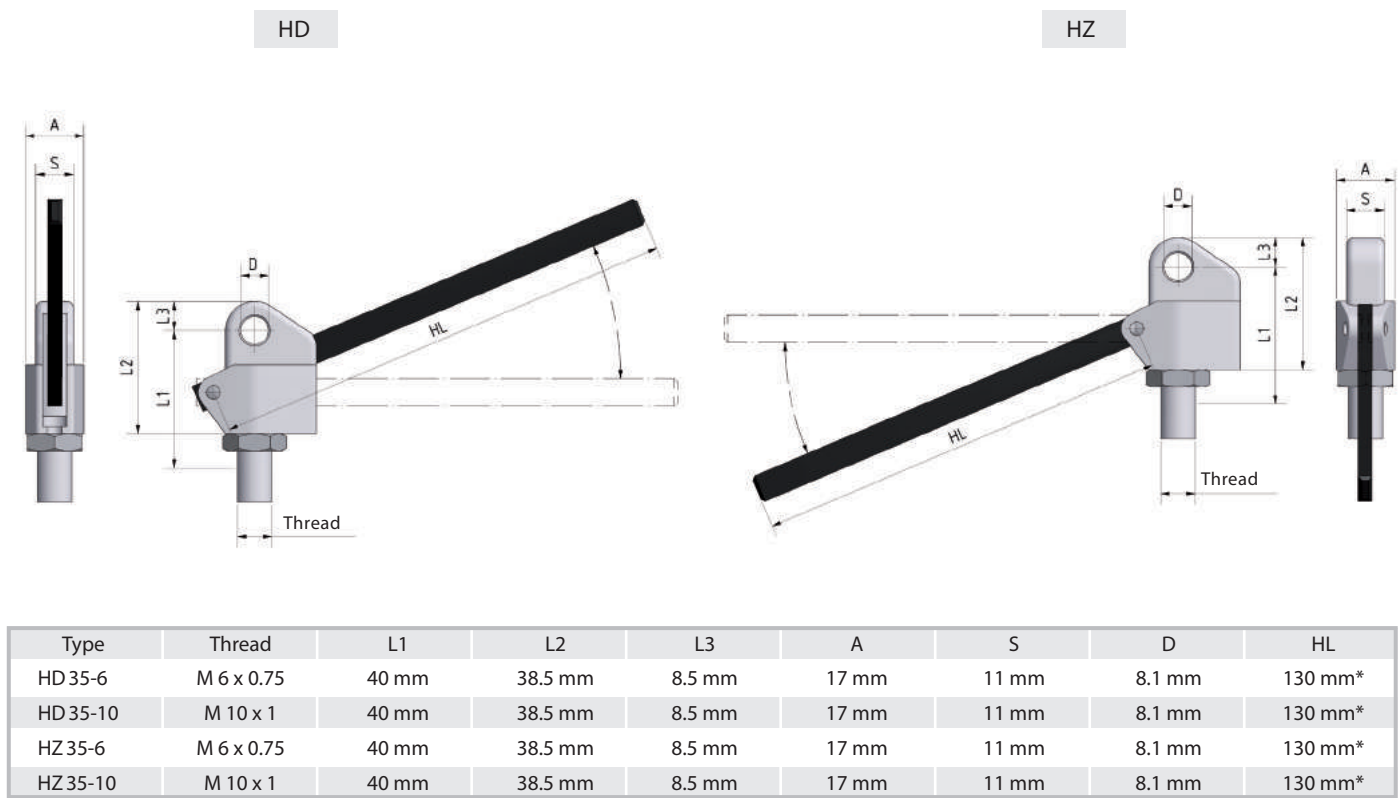


* Other lever lengths on request

Release head	Aluminium die casting
Operating lever	Steel/black oxide


Bowden cable releases for locking gas springs

HAHN locking gas springs can also be mechanically released and locked over larger distances by means of Bowden cable releases. They are characterised by optimum force transmission, high durability and absolute operational reliability.

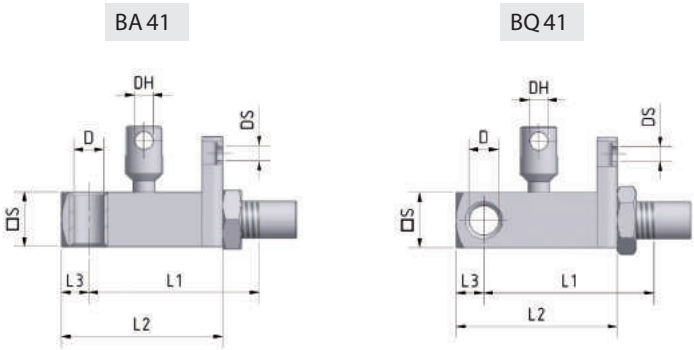

Release head Aluminium anodised
Operating lever Steel zinc-plated
Shoe Steel plate zinc-plated

Type	Thread	L1	L2	L3	S	D	DH	DS
BA 41	M 10 x 1	41 mm	43.5 mm	7.5 mm	15 mm	8.1 mm	5.1 mm	4.1 mm
BQ 41	M 10 x 1	41 mm	43.5 mm	7.5 mm	15 mm	8.1 mm	5.1 mm	4.1 mm

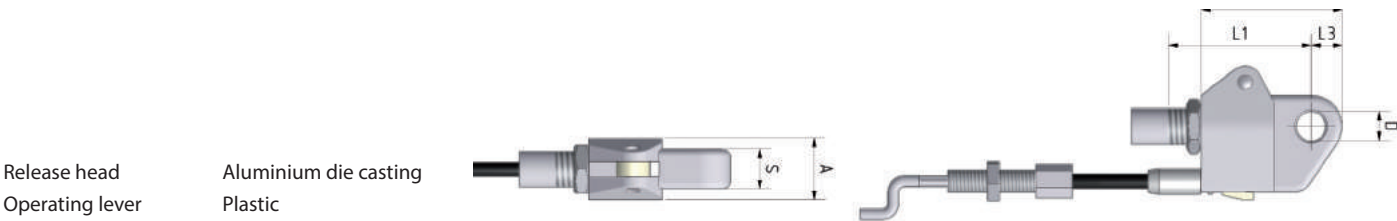


Release head Aluminium die casting
Operating lever Plastic

Type	Thread	L1	L2	L3	A	D	S
BD 35-10	M 10 x 1	40 mm	38.5 mm	8.5 mm	17 mm	8.1 mm	11 mm

Additional part: Adapter for M6 thread can be ordered
Bowden cables with Z hooks matching the Bowden cable release BD35 in the standard lengths: 500, 750, 1000, 1250 and 1500 mm.

Hydraulic release system HY for locking gas springs

HY 1 · 1 Release for 1 spring

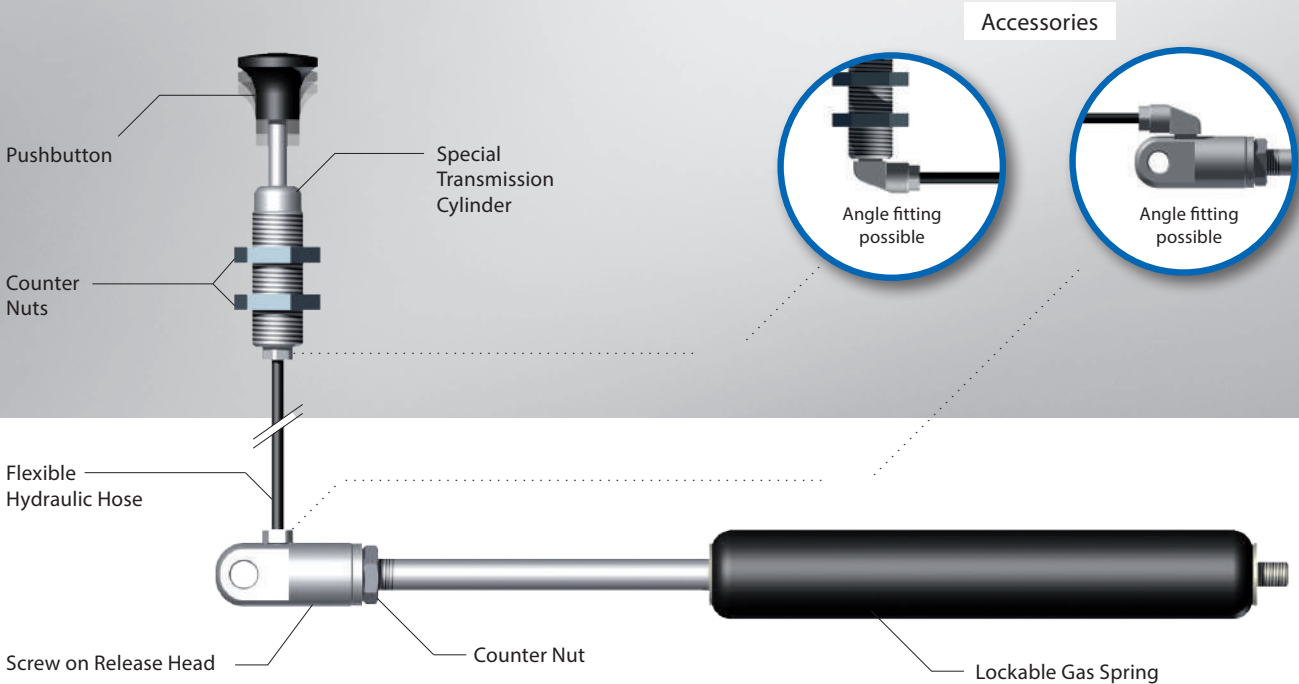

The HAHN Hydraulic Release System is especially made and adapted for your applications and requests.

You are getting a ready-to-install and maintenance-free system with a lot of advantages. Until now, the design and function of your latest designs and developments has been limited by cable controls and lever releases. The HY Release System gives more flexibility, just from the touch of a pushbutton.

- Application Range:
- Furniture
 - Massage Couches
 - Hospital Beds
 - Operation Panels
 - Table Adjustments
 - Safety Systems
 - Handling Systems
 - Medicine Devices
 - Quick Adjustment of Seats for Heavy Plant Machinery, Cranes, Tractors etc.

HY 2 · 1 Release for 2 springs



HY 3 · 2 Releases for 1 spring



HY 4 · 2 Releases for 2 springs

