


Solenoid & Pilot Actuated Spool Valves



40mm Body Width

5Port 2Position Solenoid Valve





Single Solenoid
SIV411-IP-SD2-***



External Pilot
SIV411-EP-SD2-***




Double Solenoid
SIV420-IP-SC2-CN2-***

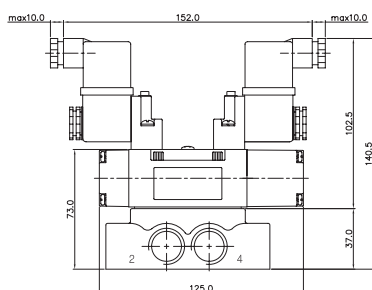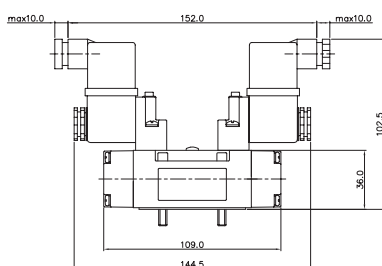


5Port 3Position Solenoid Valve


Closed Center
SIV433-IP-SC2-CN2-***



Exhaust Center
SIV443-IP-SC2-CN2-***





Pressure Center
SIV453-IP-SC2-CN2-***







5Port 2Position Pneumatic Valve

Single Pneumatic
SIP411

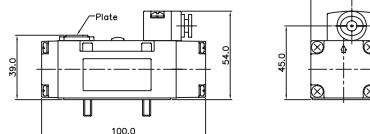


Double Pneumatic
SIP420




5Port 3Position Pneumatic Valve


Closed Center
SIP433



Exhaust Center
SIP443



Pressure Center
SIP453




Sub Base Ordering Code

SIB4 1 - S		
Base Series	Port & Thread	Function
SIB4	0 None	S Single Station Sub Base, Without Pilot Ports
SIV400 Solenoid Valve	1 G 1/4	SP Single Station Sub Base, With Pilot Ports
	2 G 3/8	
	3 G 1/2	
	6 NPT 1/4	
	7 NPT 3/8	
	8 NPT 1/2	

SIB40 SINGLE SUB BASE



(SIV400 Solenoid & Pneumatic Valve Use Sub Base)

Single Station Sub Base Dimension



Sub Base Gasket
(Material: NBR)

Sub Base
(Material: Al)

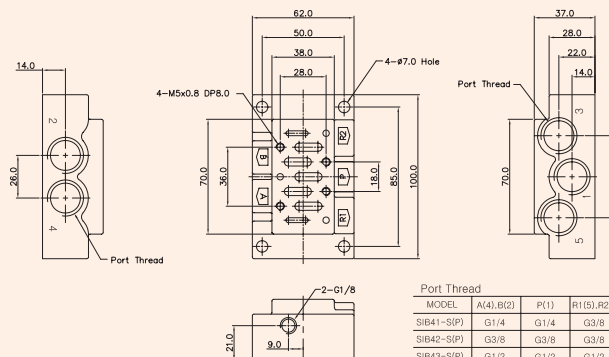

MODEL	A(4), B(2)	P(1)	R(1), R2(3)
SIB41-S(P)	G1/4	G1/4	G3/8
SIB42-S(P)	G3/8	G3/8	G3/8
SIB43-S(P)	G1/2	G1/2	G1/2