


SC200. M5

"C" COMPACT Series

Solenoid / Pneumatic Valves

- 5/2, 5/3-M5, 3/2-M3 ■ 10mm Body Width
- Manifold or Sub-Base Type
- High Efficiency, Space Economy Type
- Transition Flow 130ℓ/min (5bar)

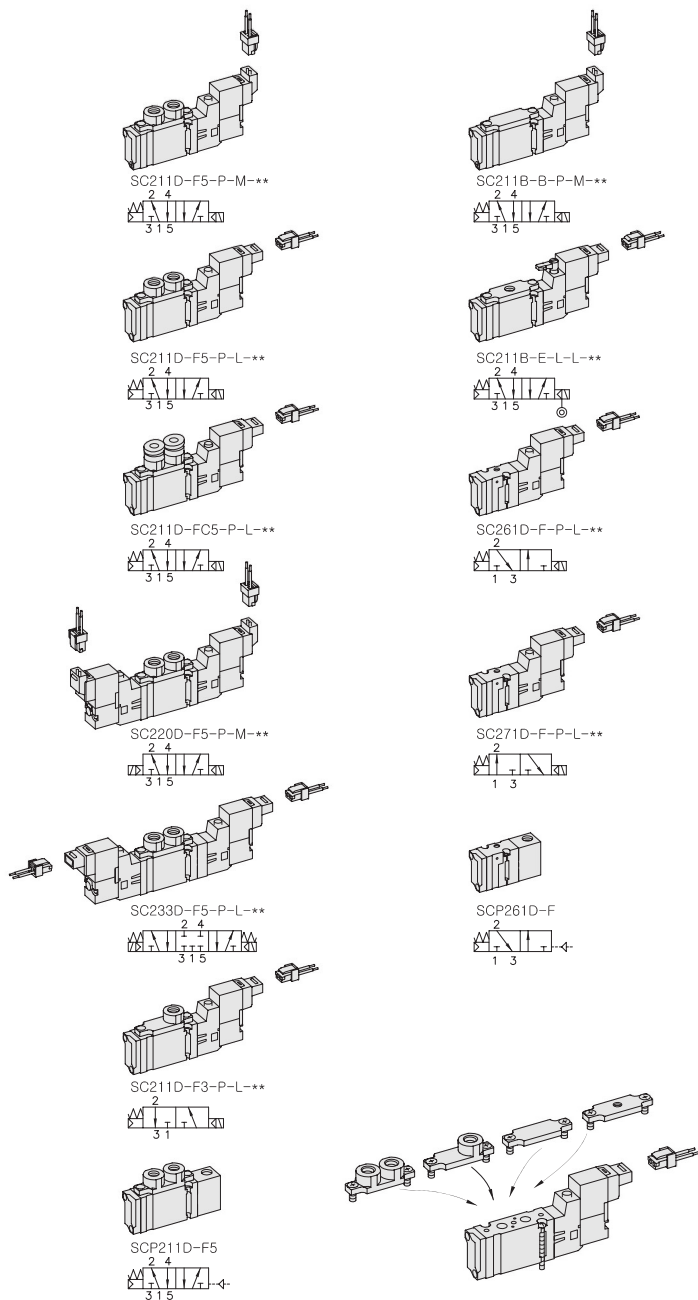


** : Voltage Selection (see page 10)

SPECIFICATION

ITEM	SERIES FUNCTION	SOLENOID, PNEUMATIC	
		5, 3Port 2Position	5Port 3Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		2.0~7.0	2.5~7.0
Eff. Sectional Area(mm ²) -5bar		2.3	1.8
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		20ms or Less	30ms or Less
Max. Working Frequency		10c/sec	8c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		DC:10% or Less	
Power Consumption(DC)		Holding-DC: 0.65W (24V:27.0mA/12V:54.0mA)	


Transition Capacity Graph

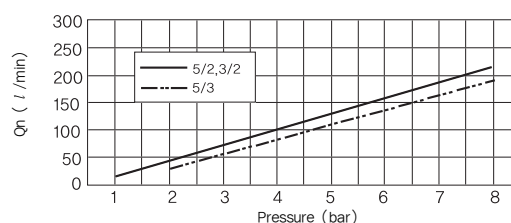

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast
- Pilot Parts : Glass Filled Nylon
- Armature : Stainless Steel
- Armature Seals : Viton

Port Plate Ordering Code (Material : Zinc)

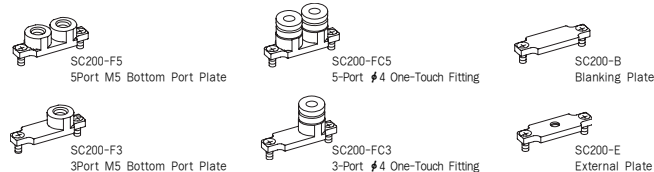

* The specification on each item can be amended without any prenotice to improve a performance.
* The specification on each item can be different from actual specification.

ORDERING NO.

SC2 1 1 D - F5 - P - L - D4

Valve Series	Function	Return Method		Port Type		Port Plate & Thread		Manual Operator		Solenoid Coil Type		Voltage	
SC2 : Solenoid Valve	1 5/2 Single	0	None	D	Manifold	0	None	0	None	0	None	0	None
	2 5/2 Double	1	Air + Spring	B	Sub-Base	F5	5-Port M5×0.8	P	Push Non-Locking	L	90 Degree Plug-in Wire Assembly with LED	D4	DC 24V
	3 5/3 Closed Center	2	Air			F3	3-Port M5×0.8					D2	DC 12V
	4 5/3 Open Center	3	Spring			FN5	5-Port NPT M5×0.8	L	Lever Locking	M	180 Degree Plug-in Wire Assembly with LED		
SCP2 : Pneumatic Valve	5 5/3 Pressure Center					FN3	3-Port NPT M5×0.8						
	6 3/2 Normally Closed					FC5	5-Port φ4 One-Touch Fitting						
	7 3/2 Normally Open					FC3	3-Port φ4 One-Touch Fitting						
						E	External End Plate, Plate M3×0.5						
						B	Blanking End Plate						