


SCE500. 3/8

"E" ECONOMY Series
Solenoid / Pneumatic Valves

- 5/2, 5/3, 3/2-3/8 ■ 26mm Body Width
- Sub-Base or Manifold Mounting Type
- High Efficiency, Expense Reduction Type
- Transition Flow 2200ℓ/min (5bar)

SPECIFICATION


ITEM	FUNCTION	SOLENOID, PNEUMATIC	
		5, 3 Port 2 Position	5 Port 3 Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Sectional Area(mm ²) -5bar		40.0	30.0
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		30ms or Less	40ms or Less
Max. Working Frequency		5c/sec	3c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:5.5VA(60Hz) / DC:2.5W	

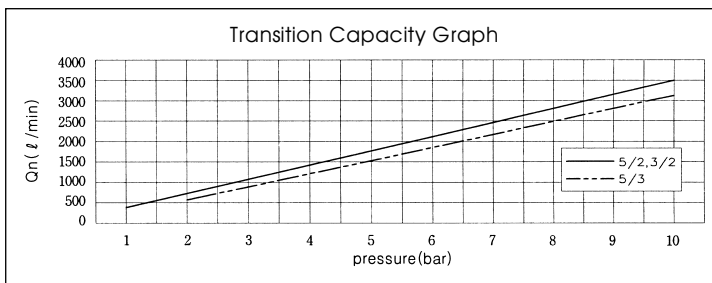

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast
- Pilot Parts : Glass Filled Nylon
- Armature : Stainless Steel
- Armature Seals : Viton

Port Plate Ordering Code (Material : Zinc)

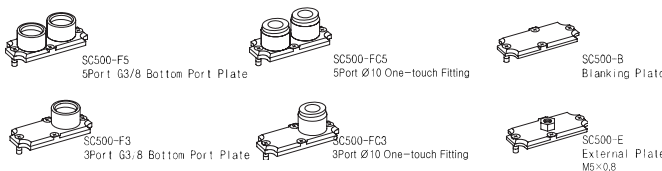

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

ORDERING NO.

SCE5														1		1		B		-		F		-		P		-		SC2		-		CN2		-		D4	
Valve Series				Function				Return Method				Port Type				Port Plate & Thread				Manual Operator				Solenoid Coil Type				Connector Type				Voltage							
SCE5 : Solenoid Valve				1	5/2 Single			0	None			D	Manifold			F	G3/8			0	None			0	None			0	None										
				2	5/2 Double			1	Air + Spring			B	Sub-Base			FN	NPT 3/8			P	Push			SC2	3 Pin Connector Coil			CN2	Normal Connector			A2	AC 230V						
				3	5/3 Closed Center			2	Air							FC	ø 10 One-Touch Fitting				Non-Locking			SG2	Grommet / Flying Leads			CD2	Connector With LED			A1	AC 110V						
				4	5/3 Open Center			3	Spring											L	Lever Locking			SD2	Grommet / Flying Leads With LED			CZ2	Connector With LED & Surge Suppressor			A4	AC 24V						
SCEP5 : Pneumatic Valve				5	5/3 Pressure Center											B	Blanking End Plate																			D4	DC 24V		
				6	3/2 Normally Closed											E	External End Plate, Plate M5×0.8																			D2	DC 12V		
				7	3/2 Normally Open																																		