



FT Series

Foot Treadle Operated
Air Return & Spring Return Spool Valves



- 5/2, 5/3
- Pilot Type - 1/4, 3/8
- Direct Operation Type - 1/2
- Excellent Durability



FT410-S
2 4
3 1 5




FT510-S
2 4
3 1 5

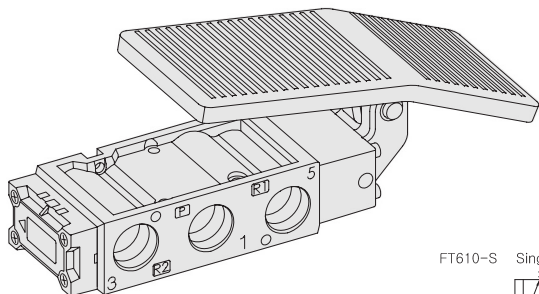

SPECIFICATION

ITEM	FUNCTION	SERIES	
		FT410-S	FT510-S
Fluids		Compressed Air & Inert Gases	
Port Size		1/4	3/8
Pressure(bar)		1.5~8.0	
Eff. Sectional Area(mm ²)-5bar		19.0	35.0
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Lubrication		Not Required(Use ISO VG32 #)	

Transition Capacity Graph

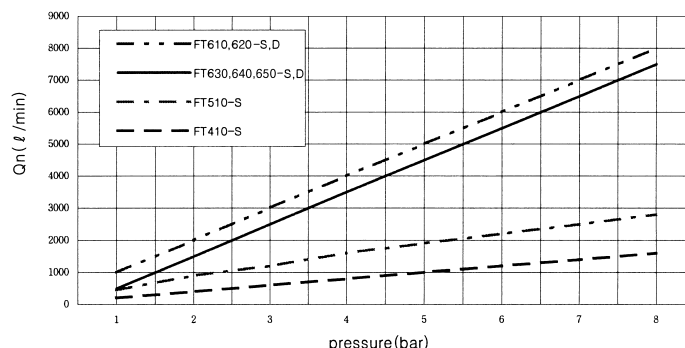

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast
- Pilot parts : Glass Filled Nylon
- Foot Upper Plate : Die-Cast Aluminium
- Foot Low Plate : Zinc Pressure Die-Cast

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

ORDERING NO.

FT4 1 0 - S

Valve Series

FT4 :
1/4-Port Body
FT5 :
3/8-Port Body
FT6 :
1/2-Port Body

Function

1	5/2 Single
2	5/2 Double
3	5/3 Closed Center
4	5/3 Open Center
5	5/3 Pressure Center

Port Size & Thread

0	G
1	NPT

Return Method

S	Spring Return
D	Detented