




YSV20

Direct Actuated
15mm Micro Solenoid Valves



- 3/2- Direct Operation Type
- Manifold Mounting Type
- Orifice $\varnothing 1.1\text{mm}$





YSV20-DP-SD-***





YSV20-DP-SC-CN1-***

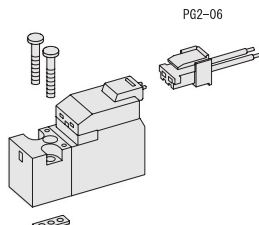

YSV20-DP-SM-***

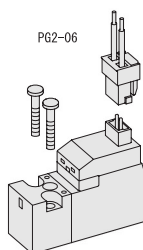

YSV20-DP-SL-***

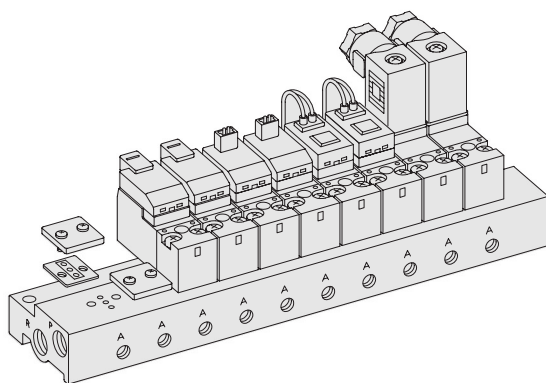


***: Voltage Selection

SPECIFICATION

SERIES	YSV20
ITEM / FUNCTION	3/2-N.C
Fluids	Compressed Air & Inert Gases
Pressure(bar)	0~8.0
Orifice(mm)	P = $\varnothing 1.1$, R = $\varnothing 1.5$
Ambient & Fluid Temp.	5~60°C (41~140°F)
Response Time(5bar)	20ms or Less
Max. Working Frequency	10c/sec
Lubrication	Not Required(Use ISO VG32 #)
Manual Override	Push Button
Coil Insulation Class	F-Class or Equivalent
Permissible Voltage Variation	±10% of Rated Voltage
Off Min. Residual Voltage	AC:20% or Less / DC:10% or Less
Power Consumption	AC:3.5VA(60Hz) / DC:2.5W


Transition Capacity Graph

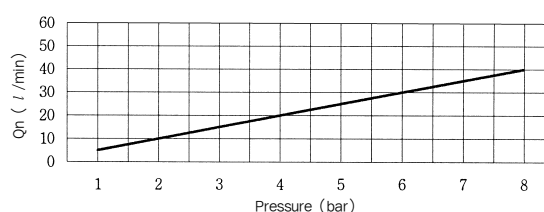

The Material of Parts


- Pilot Parts : Glass Filled Nylon
- Spring : Stainless
- Seals : NBR
- Armature : Stainless Steel
- Indicator Cap : Polycarbonate
- Lead Wire : AWG-no.24
- Lead Wire Packing : Viton

Plug Connector With Clip



Ordering Code
PG2-06 (L : 600mm)
PG2-10 (L : 1,000mm)

Blanking Plate (Material : STS304)





Ordering Code
YMF20 - BLK

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

ORDERING NO.





YSV2 0 - D P - SC - CN1 - D4

Valve Series	Function	Pilot Source	Manual Operator	Solenoid Coil Type	Connector Type	Voltage
YSV2 : Solenoid Valve	0 3/2 Normally Closed Spring Return	D Direct Operated	P Push Non-Locking	0 None SC 3 Pin Connector Coil SG Grommet /Flying Leads SD Grommet /Flying Leads With LED SL 90 Degree Plug-in Wire Assembly with LED SM 180 Degree Plug-in Wire Assembly with LED	0 None CN1 Normal Connector CD1 Connector With LED CZ1 Connector With LED & Surge Suppressor	0 None A2 AC 220V A1 AC 110V D4 DC 24V D2 DC 12V




Direct Solenoid Actuated Valves


15mm Micro





Normally Closed Type

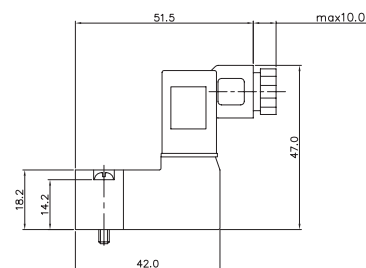




YSV20-DP-SC-CN1-***
Normally Closed




YSV20-DP-SD-***
Normally Closed




YSV20-DP-SL-***
Normally Closed



Sealing Area





YSV20-DP-SM-***
Normally Closed



YMF20 MANIFOLD BLOCK

(YSV20 Solenoid Valve Use)

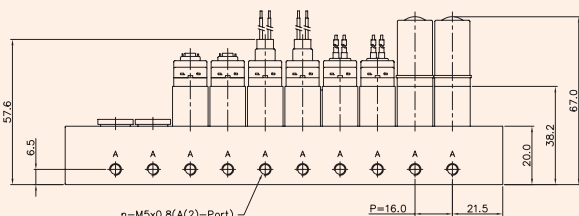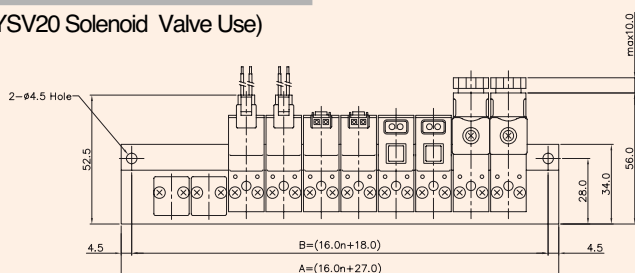

3-PORT MANIFOLD BLOCK DIMENSION		n=STATION					
ITEM		2	4	6	8	10	14
B		50.0	82.0	114.0	146.0	178.0	242.0
A		59.0	91.0	123.0	155.0	187.0	251.0

Manifold Block Ordering Code

YMF 20		2	
Symbol		Manifold Station	
YMF20	3 Way	02	2-Station
		04	4-Station
		06	6-Station
		08	8-Station
		10	10-Station
		12	12-Station
		14	14-Station

Blanking Plate Ordering Code

YMF20-BLK	
Blanking Plate. (Material: STS304)	
Manifold Plate. (Material: STS304)	
Manifold Gasket. (Material: NBR)	

