

Booster Series


Direct Compressed Type
Precompressed Type

■ Heavy Pressure Rate - 11 : 1
25 : 1

■ Overflowing Oil Gauge
70cm³ (70cc)


Direct Compressed Type

YNBH3-40 (11:1)
YNBH3-60 (25:1)



Precompressed Type

YNPH3-40 (11:1)
YNPH3-60 (25:1)



Converter is Optional


SPECIFICATION

ITEM	SERIES	YNBH3-40 YNPH3-40	YNBH3-60 YNPH3-60
Heavy Pressure Rate		11 : 1	25 : 1
Overflowing Oil Gauge		70cm ³ (70cc)	70cm ³ (70cc)
Overflowing Oil Pressure at the Time of Application Maximum air Pressure Temperature		77kgf/cm ²	175kgf/cm ²
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Operation Oil		Cosmomiter 10(cosmo gasolin), Tough spendux oil(made in Julkwang Tongsan Co.)	
Air Pressure Department	Fluid	Air	
	Oil-Feeding	Not Require	
	Pressure	3~7bar	
	Oil	Tubin oil, Oil Equivalent to ISO VG 32#	
Weight(direct pressure)		8.0kgf	10.0kgf

The Material of Parts

- Rod Cover : Die-Cast Aluminium
- Tie Rod : Carbon Iron
- Head Cover : Die-Cast Aluminium
- Hex Nut : Carbon Iron
- Tube : Aluminium Extruding

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

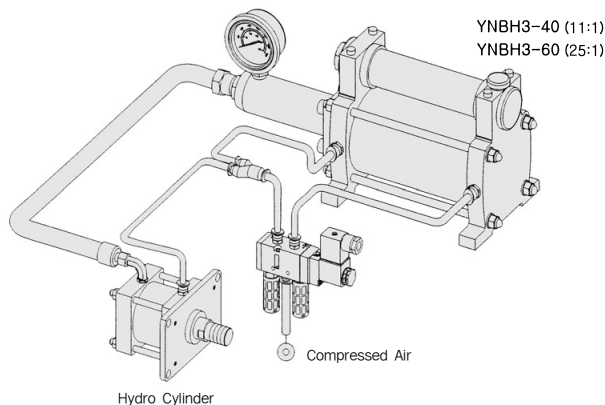


Hydro Cylinder

YNBH3-40 (11:1)
YNBH3-60 (25:1)

Compressed Air

Direct Compressed Type

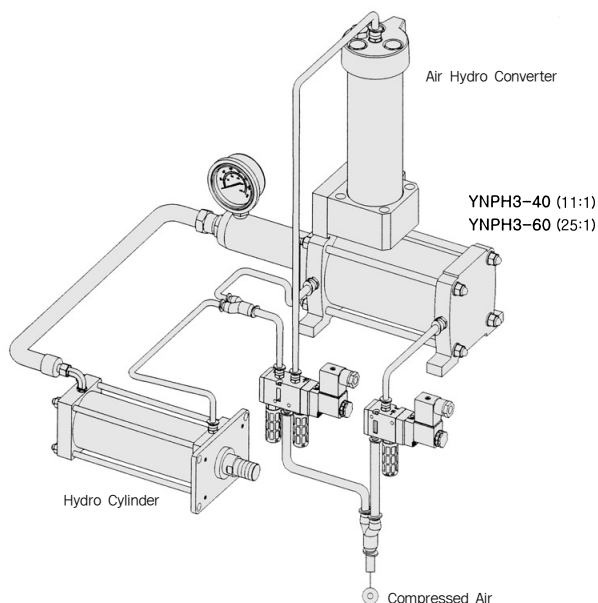

Air Hydro Converter

YNPH3-40 (11:1)
YNPH3-60 (25:1)

Hydro Cylinder

Compressed Air

Precompressed Type

ORDERING NO.

YNBH 3 - 40 - 70

Booster Series



YNBH3	Direct Compressed Type
YNPH3	Precompressed Type

Heavy Pressure Rate

40	(11:1)
60	(25:1)




Overflowing

70	70CC
100	100CC

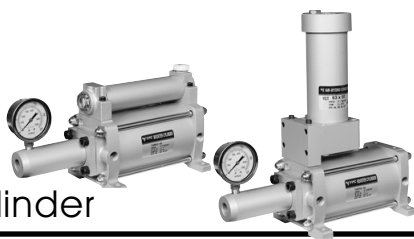

Booster Cylinder



11 : 1, 25 : 1

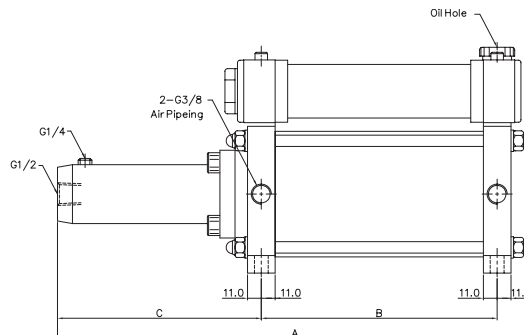

MODEL NO.	A	B	C	F	G	J	K	L	M
YNBH3-40-70	378	188	162.5	155	130	180	120	60	14
YNBH3-40-100	478	238	212.5						
YNBH3-60-70	378	188	162.5						
YNBH3-60-100	478	238	212.5	225	190	227	137	90	16


Precompressed Type

MODEL NO.	A	B	C	F	G	J	K	L	M
YNPH3-40-70	378	188	162.5	155	130	196	136	60	14
YNPH3-40-100	478	238	212.5						
YNPH3-60-70	378	188	162.5						
YNPH3-60-100	478	238	212.5	225	190	245	156	90	16

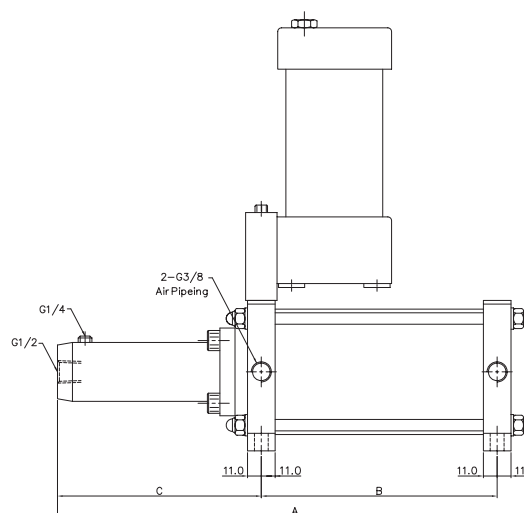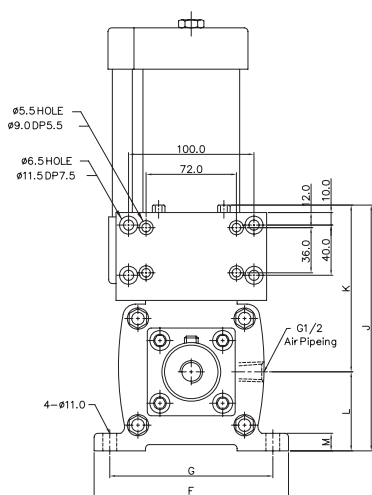


► Ending stroke

After finished work, compressor of oil cylinder has been restored to air pressure by converting valve, and all the stroke is returned original state, then is prepared to travel stroke.

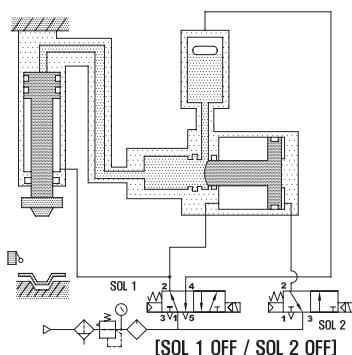

► Precompressed Travelling stroke

By using compressor, high compressed oil should be travelled to the hydraulic to get output.

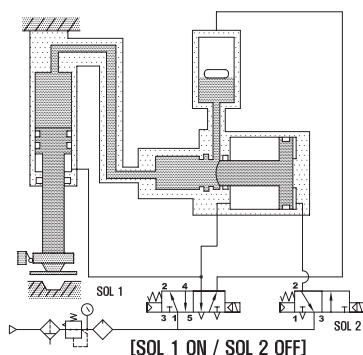

► Travelling stroke

By using common converter it has been changed from "low-compressed air pressure" to "oil pressure" at the time of 1:1 pressure.

