


KMV Series

Knob Push / Pull Manually
Actuated Spool Valves


- 5/2, 3/2 - 1/8, 1/4
- Direct Operation Type
- Simple Operation
- Space Economy Type

SPECIFICATION


ITEM	SERIES	KMV300	KMV400
	FUNCTION	5/2-Way	5/2, 3/2-Way
Fluids	Compressed Air & Inert Gases		
Port Size		1/8	1/4
Pressure(bar)	0~8.0		
Eff. Sectional Area(mm ²)-5bar		13.5	18.0
Ambient & Fluid Temp.	5~60°C (41~140°F)		
Lubrication	Not Required(Use ISO VG32 #)		



KMV310-S
2 4
3 1 5




KMV310-S-P
2 4
3 1 5




KMV310-DA
2 4
3 1 5




KMV310-D
2 4
3 1 5




KMV310-D-P
2 4
3 1 5



KMV410-S
2 4
3 1 5




KMV410-S-P
2 4
3 1 5




KMV410-DA
2 4
3 1 5



KMV410-D
2 4
3 1 5



KMV410-D-P
2 4
3 1 5



KMV460-S
OUT
NC NO




KMV460-D
OUT
NC NO



KMV460-DA
OUT
NC NO

Transition Capacity Graph

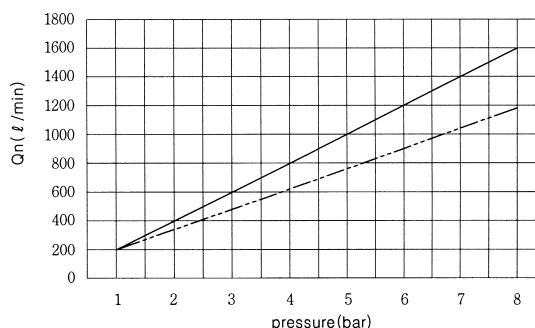

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Cap : Zinc Pressure Die-Cast
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Lever Parts : Steel, NBR, Aluminium
- Standing Plate : Steel Plate

Standing Plate (Material : SCP1)



Ordering Code
KMV-P

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

ORDERING NO.

KMV3

1

0

-

S

-

P

Valve Series

KMV3 :
1/8-Port Body

KMV4 :
1/4-Port Body

Function

1	5/2 Single
6	3/2 Normally Closed

Port Size & Thread


0	G
1	NPT

Return Method

S	Push, Spring Return
D	Push, Full
DA	Push, Air Return

Plate

P	Standing Plate
---	----------------




Knob Push / Pull Manually Actuated Valves

Port Thread 1/8, 1/4


5/2-Way, Spring Return & Push Pull & Air Return Operation Thread-G1/8

ITEM	KMV310-S	KMV310-D
T ₁	4.0mm	4.0mm
F ₁	4.5kg	2.0kg

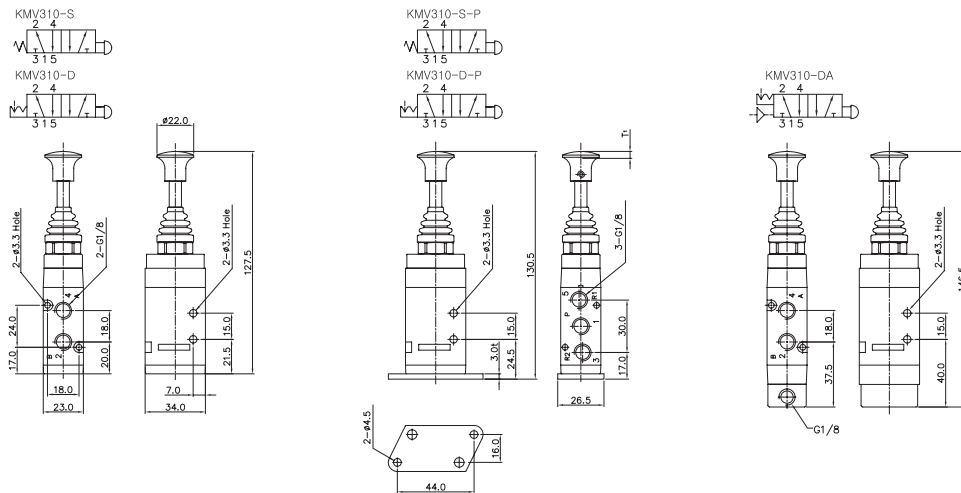

5/2-Way, Spring Return & Push Pull & Air Return Operation Thread-G1/4

ITEM	KMV410-S	KMV420-D
	KMV460-S	KMV460-D
T ₁	4.0mm	4.0mm
F ₁	4.5kg	2.0kg

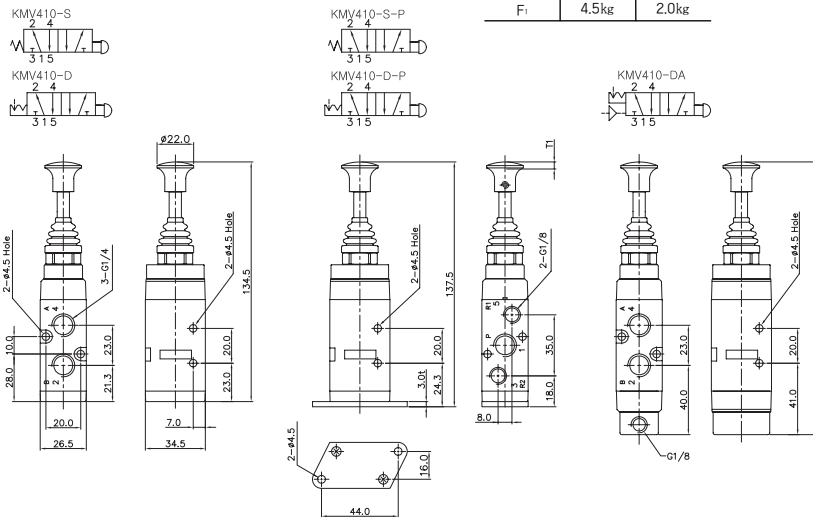

3/2-Way, Spring Return & Push Pull & Air Return Operation Thread-G1/4

