

HLV Series


Hand Lever Operated
Spool Valves

- Direct Operation Type
- 5/2, 5/3, 3/2
- 1/8, 1/4, 3/8, 1/2
- High Flow Capacity

SPECIFICATION

SERIES	HLV300	HLV400	HLV500	HLV600
ITEM	FUNCTION	5/2, 5/3-Way	5/2, 5/3, 3/2-Way	5/2, 5/3-Way
Fluids	Compressed Air & Inert Gases			
Port Size	1/8	1/4	3/8	1/2
Pressure(bar)	0~8.0			
Eff. Sectional Area(mm ²)-5bar	13.5	18.0	35.0	90.0
Ambient & Fluid Temp.	5~60°C (41~140°F)			
Lubrication	Not Required(Use ISO VG32 #)			

Transition Capacity Graph

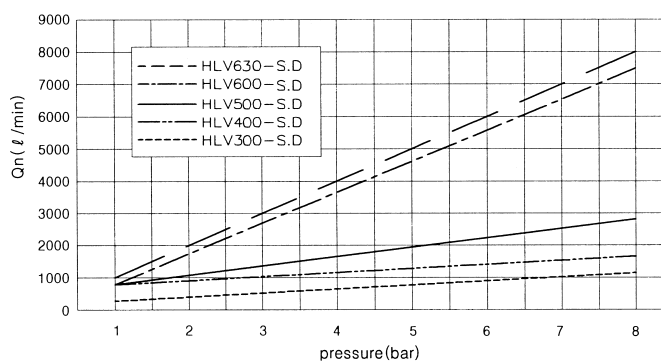

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Lever Parts : Steel, NBR, Plastic

※ The specification on each item can be amended without any prenotice to improve a performance.
 ※ The specification on each item can be different from actual specification.

ORDERING NO.

HLV3

1

0

-

S

Valve Series

HLV3:
1/8-Port Body
HLV4:
1/4-Port Body
HLV5:
3/8-Port Body
HLV6:
1/2-Port Body

Function


1	5/2 Single
2	5/2 Double
3	5/3 Closed Center
4	5/3 Open Center
5	5/3 Pressure Center
6	3/2 Normally Closed

Port Size & Thread

0	G
1	NPT

Return Method


S	Single Spring Return
D	Double Detented




Hand Lever Operated Spool Valves

Port Thread 1/8, 1/4, 3/8, 1/2


5/2-Way, Hand Lever Manually Actuated Valve Thread-G1/8

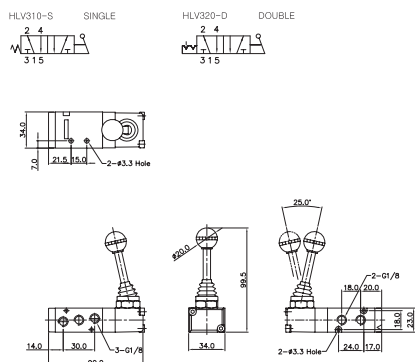


5/3-Way, Hand Lever Manually Actuated Valve Thread-G1/8

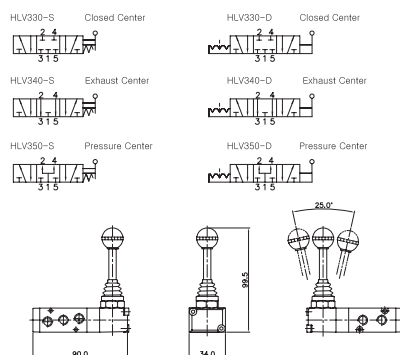


5/2-Way, Hand Lever Manually Actuated Valve Thread-G1/4

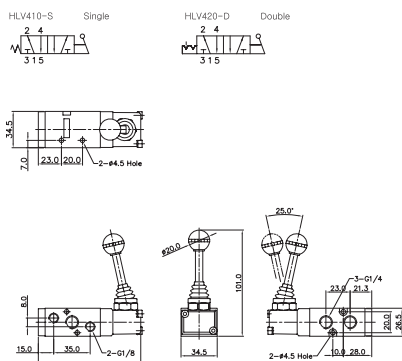


5/3-Way, Hand Lever Manually Actuated Valve Thread-G1/4

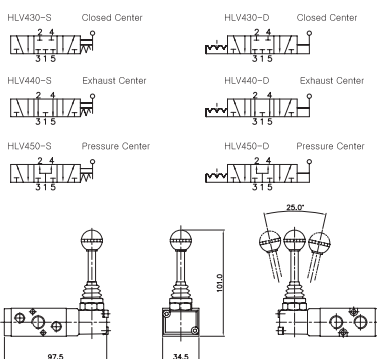


3/2-Way, Hand Lever Manually Actuated Valve Thread-G1/4

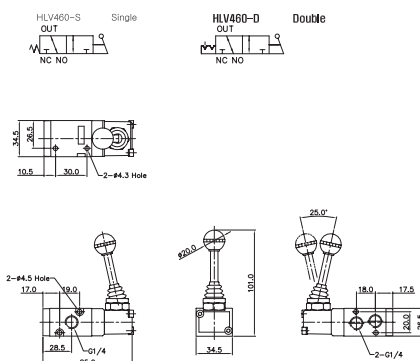


5/2-Way, Hand Lever Manually Actuated Valve Thread-G3/8

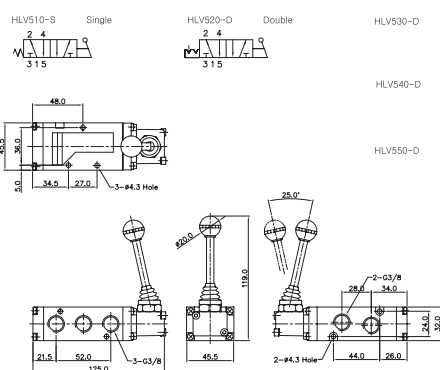


5/3-Way, Hand Lever Manually Actuated Valve Thread-G3/8

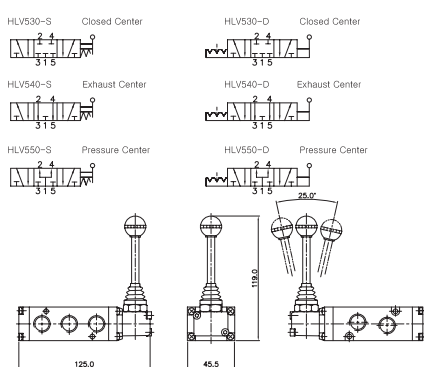

3/2-Way, Hand Lever Manually Actuated Valve Thread-G3/8

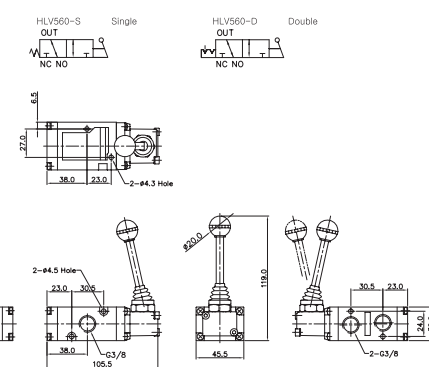

5/2-Way, Hand Lever Manually Actuated Valve Thread-G1/2

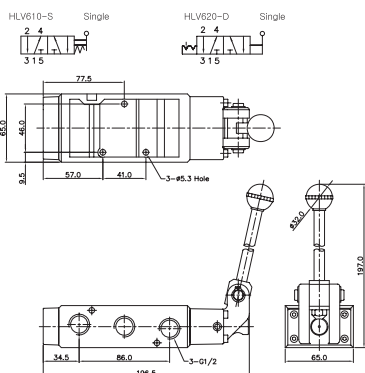

5/3-Way, Hand Lever Manually Actuated Valve Thread-G1/2

