


SC200. M5

"C" COMPACT Series

Solenoid / Pneumatic Valves

- 5/2, 5/3-M5, 3/2-M3 ■ 10mm Body Width
- Manifold or Sub-Base Type
- High Efficiency, Space Economy Type
- Transition Flow 130ℓ/min (5bar)

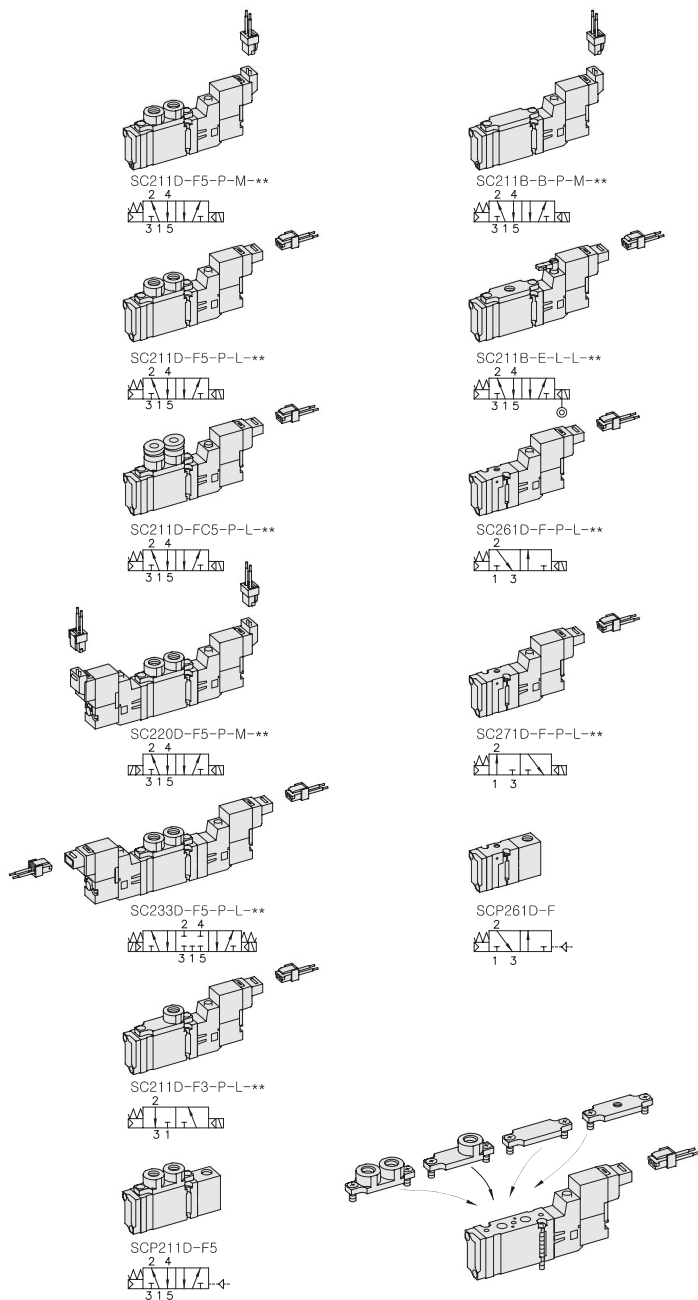


** : Voltage Selection (see page 10)

SPECIFICATION

ITEM	SERIES FUNCTION	SOLENOID, PNEUMATIC	
		5, 3Port 2Position	5Port 3Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		2.0~7.0	2.5~7.0
Eff. Sectional Area(mm ²) -5bar		2.3	1.8
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		20ms or Less	30ms or Less
Max. Working Frequency		10c/sec	8c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		DC:10% or Less	
Power Consumption(DC)		Holding-DC: 0.65W (24V:27.0mA/12V:54.0mA)	


Transition Capacity Graph

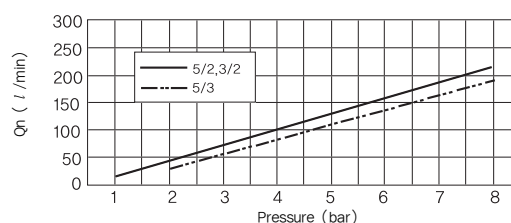

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast
- Pilot Parts : Glass Filled Nylon
- Armature : Stainless Steel
- Armature Seals : Viton

Port Plate Ordering Code (Material : Zinc)

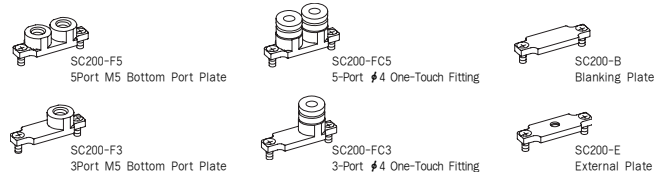


* The specification on each item can be amended without any prenotice to improve a performance.
* The specification on each item can be different from actual specification.

ORDERING NO.

SC2 1 1 D - F5 - P - L - D4

Valve Series	Function	Return Method		Port Type		Port Plate & Thread		Manual Operator		Solenoid Coil Type		Voltage	
SC2 : Solenoid Valve	1 5/2 Single	0	None	D	Manifold	0	None	0	None	0	None	0	None
	2 5/2 Double	1	Air + Spring	B	Sub-Base	F5	5-Port M5×0.8	P	Push Non-Locking	L	90 Degree Plug-in Wire Assembly with LED	D4	DC 24V
	3 5/3 Closed Center	2	Air			F3	3-Port M5×0.8					D2	DC 12V
	4 5/3 Open Center	3	Spring			FN5	5-Port NPT M5×0.8	L	Lever Locking	M	180 Degree Plug-in Wire Assembly with LED		
SCP2 : Pneumatic Valve	5 5/3 Pressure Center					FN3	3-Port NPT M5×0.8						
	6 3/2 Normally Closed					FC5	5-Port φ4 One-Touch Fitting						
	7 3/2 Normally Open					FC3	3-Port φ4 One-Touch Fitting						
						E	External End Plate, Plate M3×0.5						
						B	Blanking End Plate						




Solenoid & Pilot Actuated Spool Valves


Port Thread M5, M3

5Port 2Position Solenoid Valve (Manifold)

Single Solenoid
SC211D-F5-P-L-***
2 4
3 1 5




Double Solenoid
SC220D-F5-P-L-***
2 4
3 1 5




5Port 3Position Solenoid Valve (Manifold)

Closed Center
SC233D-F5-P-M-***
2 4
3 1 5
Exhaust Center
SC243D-F5-P-M-***
2 4
3 1 5
Pressure Center
SC253D-F5-P-M-***
2 4
3 1 5




3Port 2Position Solenoid Valve (Manifold)

Single Solenoid
SC261D-F-P-L-***
2
1 3




5Port 2Position Solenoid Valve (Sub-Base)

Single Solenoid
SC211B-B-P-L-***
2 4
3 1 5




Double Solenoid
External Pilot
SC220B-E-P-M-***
2 4
3 1 5




5Port 3Position Solenoid Valve (Sub-Base)

Closed Center
SC233B-B-P-L-***
2 4
3 1 5
Exhaust Center
SC243B-B-P-L-***
2 4
3 1 5
Pressure Center
SC253B-B-P-L-***
2 4
3 1 5



5Port 2Position Pneumatic Valve


Single Pneumatic
SCP211D-F5
2 4
3 1 5



Single Pneumatic
SCP211B-B
2 4
3 1 5




Double Pneumatic
SCP220D-F5
2 4
3 1 5




5Port 3Position Pneumatic Valve

Closed Center
SCP233B-B
2 4
3 1 5
Exhaust Center
SCP243B-B
2 4
3 1 5
Pressure Center
SCP253B-B
2 4
3 1 5



3Port 2Position Pneumatic Valve



Single Pneumatic
SCP261D
2
1 3



SCB20 SINGLE, DOUBLE MANIFOLD BLOCK

(SC200 Solenoid & Pneumatic Valve Use)

Manifold Block Dimension

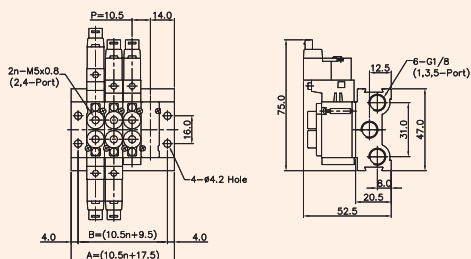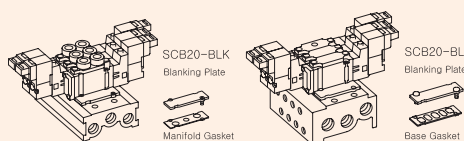


5PORT MANIFOLD BLOCK DIMENSION n=STATION


ITEM	n	2	4	6	8	10
A		30.5	51.5	72.5	93.5	114.5
B		38.5	59.5	80.5	101.5	122.5

3PORT MANIFOLD BLOCK DIMENSION n=STATION

ITEM	n	2	4	6	8	10
A		28.5	49.5	70.5	91.5	112.5
B		35.5	56.5	77.5	98.5	119.5




Double Modular Manifold Block Dimension

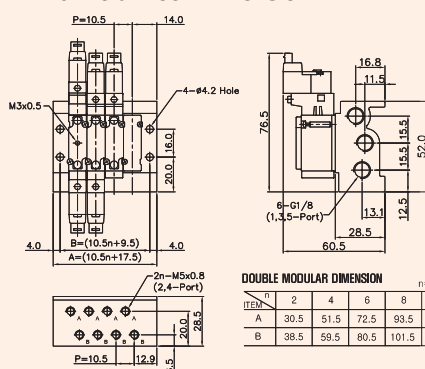

DOUBLE MODULAR DIMENSION n=STATION

ITEM	n	2	4	6	8	10
A		30.5	51.5	72.5	93.5	114.5
B		38.5	59.5	80.5	101.5	122.5



Manifold Block Dimension

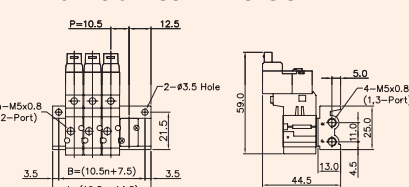

Manifold Ordering Code

SCB2		1 - D - M04			
Series	Port & Thread	Function	Manifold Station		
SCB2	0 None	0 None	M02	2-Station	
SC200 Solenoid Valve	1 G	S Single Station Sub Base, 1/8 Port Without Pilot Ports	M04	4-Station	
	2 NPT	D Manifold, Port 1/8	M06	6-Station	
		DB Double Modular Manifold Block, M5 Port	M08	8-Station	
		DC4 Double Modular Manifold Block, 1/4 Fitting	M10	10-Station	
		D3 Manifold, M5 Port Without Pilot Ports(3/2Way)			

Single Station Sub Base Dimension (SCB21-S)

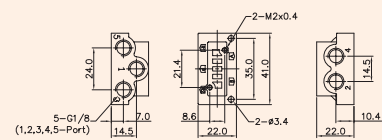

Ordering Code
SCB26-BLK
Blanking Plate
Material: STS304
Manifold Gasket.
(Material: NBR)

Ordering Code
SCB20-BLK
Blanking Plate
(Material: STS304)
Manifold Gasket.
Base Gasket.
(Material: NBR)