


SC400. 1/4

"C" COMPACT Series
Solenoid / Pneumatic Valves

- 5/2, 5/3-1/4, 3/2-1/8 ■ 18mm Body Width
- Manifold or Sub-Base Type
- High Efficiency, Space Economy Type
- Transition Flow 900ℓ/min (5bar)

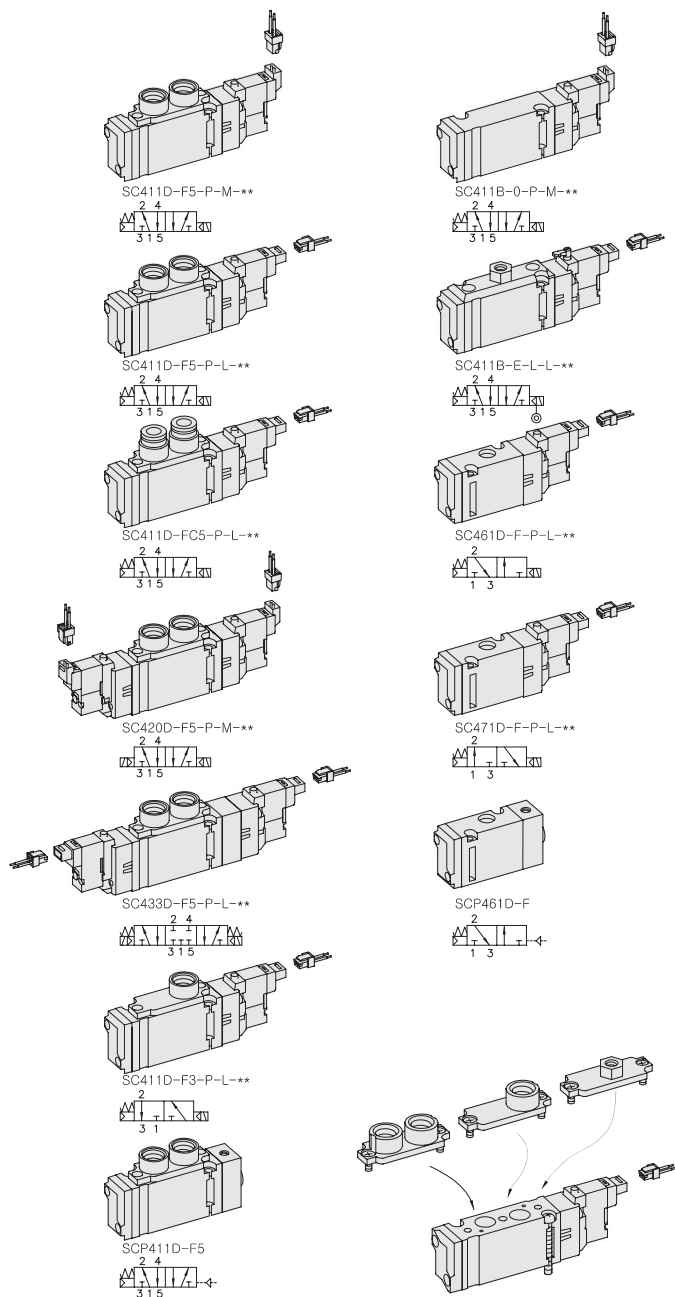


** : Voltage Selection (see page 10)

SPECIFICATION

ITEM	SERIES FUNCTION	SOLENOID, PNEUMATIC	
		5, 3Port 2Position	5Port 3Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~7.0	2.0~7.0
Eff. Sectional Area(mm ²) -5bar		16.0	12.0
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		25ms or Less	35ms or Less
Max. Working Frequency		5c/sec	3c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		DC:10% or Less	
Power Consumption(DC)		Holding-DC: 0.65W (24V:27.0mA/12V:54.0mA)	


Transition Capacity Graph

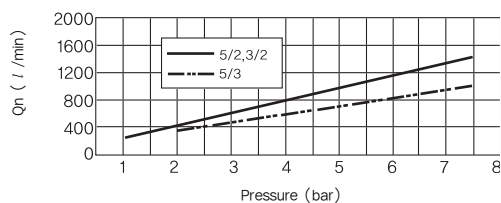

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Cap : Zinc Pressure Die-Cast
- Spool : Aluminium
- Pilot Parts : Glass Filled Nylon
- Seals : NBR
- Armature : Stainless Steel
- Spring : Stainless
- Armature Seals : Viton

Port Plate Ordering Code (Material : Zinc)

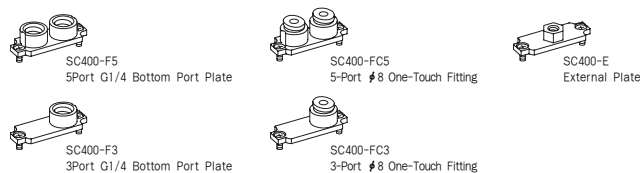


- * The specification on each item can be amended without any prenotice to improve a performance.
- * The specification on each item can be different from actual specification.

ORDERING NO.

SC4 1 1 D - F5 - P - L - D4

Valve Series	Function	Return Method		Port Type		Port Plate & Thread		Manual Operator		Solenoid Coil Type		Voltage	
SC3 : Solenoid Valve	1 5/2 Single	0	None	D	Manifold	0	None	0	None	0	None	0	None
	2 5/2 Double	1	Air + Spring	B	Sub-Base	F5	5-Port G1/4	P	Push	L	90 Degree Plug-in Wire Assembly with LED	D4	DC 24V
	3 5/3 Closed Center	2	Air			F3	3-Port G1/4		Non-Locking			D2	DC 12V
SCP3 : Pneumatic Valve	4 5/3 Open Center	3	Spring			FN5	5-Port NPT1/4	L	Lever Locking	M	180 Degree Plug-in Wire Assembly with LED		
	5 5/3 Pressure Center					FN3	3-Port NPT1/4						
	6 3/2 Normally Closed					FC5	5-Port #8 One-Touch Fitting						
	7 3/2 Normally Open					FC3	3-Port #8 One-Touch Fitting						
						E	External End Plate, Plate M5×0.8						




Solenoid & Pilot Actuated Spool Valves

Port Thread 1/4, 1/8

5Port 2Position Solenoid Valve (Manifold)



Single Solenoid

SC411D-F5-P-L-***



Double Solenoid


SC420D-F5-P-L-***



5Port 3Position Solenoid Valve (Manifold)


Closed Center

SC433D-F-P-M-***




Exhaust Center

SC443D-F5-P-M-***



Pressure Center



SC453D-F5-P-M-***



3Port 2Position Solenoid Valve (Manifold)

Single Solenoid


SC461D-F-P-L-***



5Port 2Position Solenoid Valve (Sub-Base)

Single Solenoid


SC411B-0-P-L-***



Double Solenoid

External Pilot


SC420B-E-P-L-***



5Port 3Position Solenoid Valve (Sub-Base)


Closed Center

SC433B-0-P-L-***





Exhaust Center

SC443B-0-P-L-***



Pressure Center


SC453B-0-P-L-***



5Port 2Position Pneumatic Valve



Single Pneumatic

SCP411D-F5




Single Pneumatic

SCP411B



Double Pneumatic



SCP420D-F5



5Port 3Position Pneumatic Valve



Closed Center

SCP433B





Exhaust Center

SCP443B



Pressure Center




SCP453B



3Port 2Position Pneumatic Valve

Single Pneumatic


SCP461D




SCB40 SINGLE, DOUBLE MANIFOLD BLOCK

(SC400 Solenoid & Pneumatic Valve Use)

Manifold Block Dimension

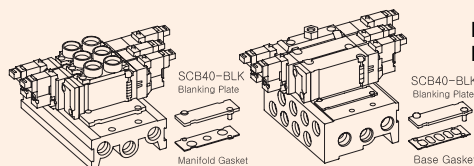



Double Modular Manifold Block Dimension

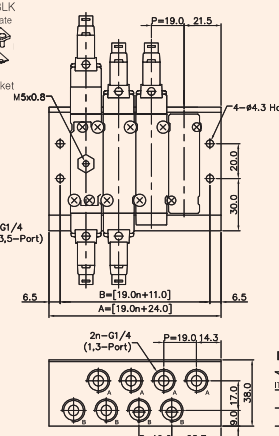


Manifold Ordering Code

SCB4 1 - D - M04			
Series	Port & Thread	Function	Manifold Station
SCB3	0 None	0 None	M02 2-Station
SC400 Solenoid Valve	1 G	S Single Station Sub Base, 1/4 Port Without Pilot Ports	M04 4-Station
	2 NPT	D Manifold, Port 1/4	M06 6-Station
		DB Double Modular Manifold Block, 1/4 Port	M08 8-Station
		DC8 Double Modular Manifold Block, Ø 8 Fitting	M10 10-Station
		D3 Manifold, Port 1/8 (3/2Way)	

Single Station Sub Base Dimension (SCB41-S)

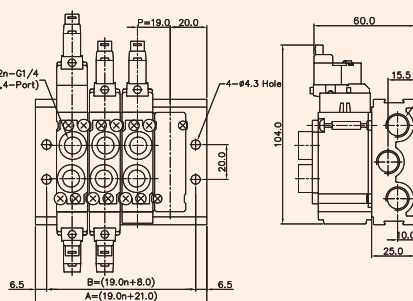

Manifold Block Dimension



ITEM	2	4	6	8	10
B	49.0	87.0	125.0	163.0	201.0
A	62.0	100.0	138.0	176.0	214.0

Ordering Code
SCB46-BLK
Blanking Plate
(Material : STS304)
Manifold Gasket,
(Material : NBR)

Ordering Code
SCB40-BLK
Blanking Plate
(Material : STS304)
Manifold Gasket,
(Material : NBR)