


SCE300.1/8

"E" ECONOMY Series
Solenoid / Pneumatic Valves

- 5/2, 5/3-1/8, 3/2-M5 ■ 15mm Body Width
- Manifold or Sub-Base Type
- High Efficiency, Expense Reduction Type
- Transition Flow 500ℓ/min (5bar)

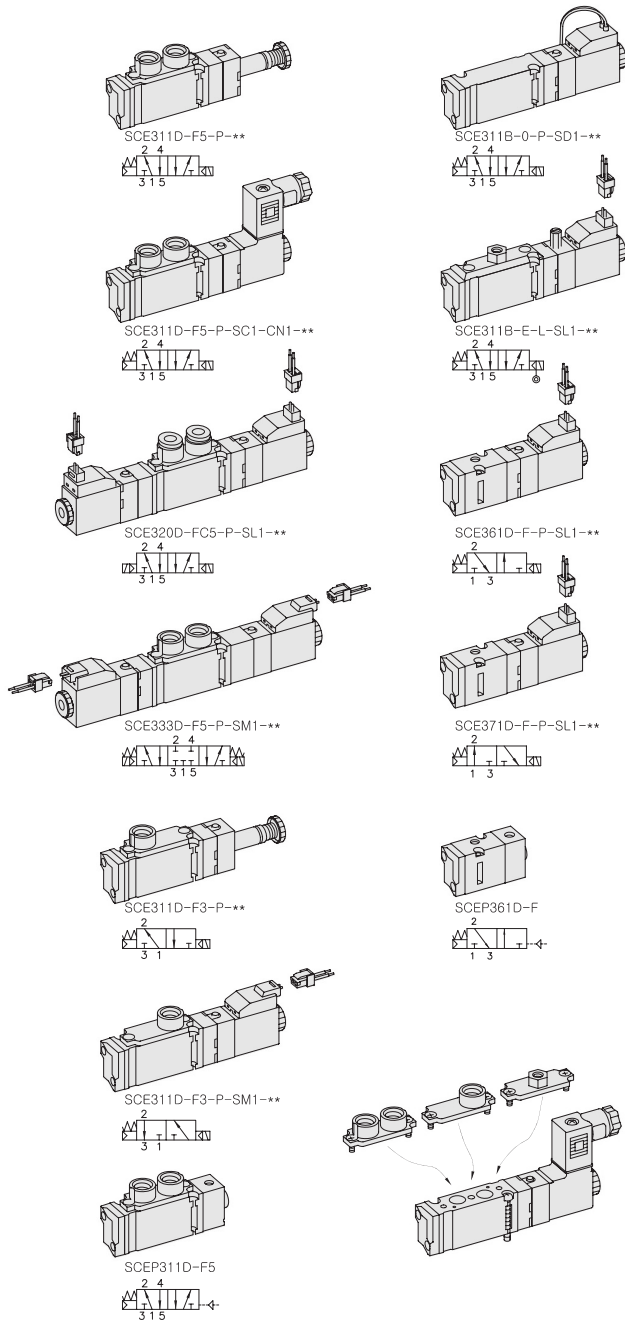


**: Voltage Selection (see page 20)

SPECIFICATION

ITEM	FUNCTION	SOLENOID, PNEUMATIC	
		5, 3Port 2Postion	5Port 3Postion
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Sectional Area(mm ²) -5bar		9.5	7.5
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		25ms or Less	35ms or Less
Max. Working Frequency		8c/sec	5c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:3.5VA(60Hz) / DC:2.5W	


Transition Capacity Graph

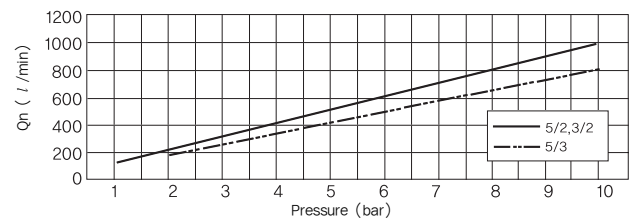

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast
- Pilot Parts : Glass Filled Nylon
- Armature : Stainless Steel
- Armature Seals : Viton


Port Plate Ordering Code (Material : Zinc)

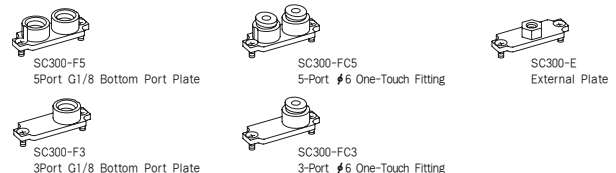

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

ORDERING NO.

Valve Series		Function		Return Method		Port Type		Port Plate & Thread		Manual Operator		Solenoid Coil Type		Connector Type		Voltage	
SCE3 : Solenoid Valve	1	5/2 Single		0	None	D	Manifold	0	None	0	None	0	None	0	None	0	None
	2	5/2 Double		1	Air + Spring			F5	5-Port G1/8	P	Push	SC1	3 Pin Connector Coil	CN1	Normal Connector	A2	AC 220V
	3	5/3 Closed Center		2	Air	B	Sub-Base	F3	3-Port G1/8		Non-Locking	SG1	Grommet/Flying Leads	CD1	Connector With LED	A1	AC 110V
	4	5/3 Open Center		3	Spring			FN5	5-Port NPT1/8	L	Lever Locking	SD1	Grommet/Flying Leads With LED	CZ1	Connector With LED & Surge Suppressor	A4	AC 24V
SCEP3 : Pneumatic Valve	5	5/3 Pressure Center						FN3	3-Port NPT1/8			SL1	90 Degree Plug-in Wire Assembly with LED			D4	DC 24V
	6	3/2 Normally Closed						FC5	5-Port #6 One-Touch Fitting							D2	DC 12V
	7	3/2 Normally Open						FC3	3-Port #6 One-Touch Fitting								
								E	External End Plate, Plate M5×0.8			SM1	180 Degree Plug-in Wire Assembly with LED				




Solenoid & Pilot Actuated Spool Valves

Port Thread 1/8, M5

5Port 2Position Solenoid Valve (Manifold)



Single Solenoid

SCE311D-F5-P-SD1-***



Double Solenoid



SCE320D-F5-P-SM1-***



5Port 3Position Solenoid Valve (Manifold)


Closed Center

SCE333D-F5-P-SL1-***



Exhaust Center

SCE343D-F5-P-SL1-***



Pressure Center



SCE353D-F5-P-SL1-***



3Port 2Position Solenoid Valve (Manifold)

Single Solenoid


SCE361D-F-P-SM1-***



5Port 2Position Solenoid Valve (Sub-Base)



Single Solenoid

SCE311B-0-P-SC1-CN1-***



Double Solenoid


SCE320B-E-P-SC1-CN1-***



5Port 3Position Solenoid Valve (Sub-Base)

Closed Center

SCE333B-0-P-SC1-CN1-***



Exhaust Center

SCE343B-0-P-SC1-CN1-***



Pressure Center



SCE353B-0-P-SC1-CN1-***



5Port 2Position Pneumatic Valve



Single Pneumatic

SCEP311D-F5



Double Pneumatic



SCEP320D-F5



5Port 3Position Pneumatic Valve


Closed Center

SCEP333B



Exhaust Center

SCEP343B



Pressure Center



SCEP353B



3Port 2Position Pneumatic Valve

Single Pneumatic


SCEP361D




SCB30 SINGLE, DOUBLE MANIFOLD BLOCK

(SCE300 Solenoid & Pneumatic Valve Use)

Manifold Block Dimension

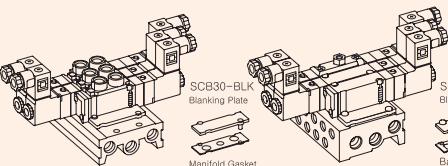


Double Modular Manifold Block Dimension

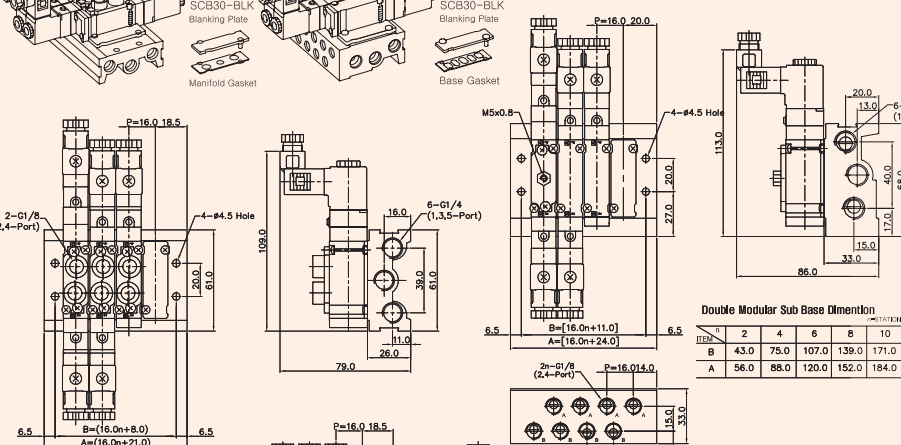

Manifold Ordering Code

SCB3 1 - D - M04				
Series	Port & Thread	Function		Manifold Station
SCB3	0 None	0	None	M02 2-Station
SC300 Solenoid Valve	1 G	S	Single Station Sub Base, 1/4 Port Without Pilot Ports	M04 4-Station
	2 NPT	D	Manifold, Port 1/4	M06 6-Station
		DB	Double Modular Manifold Block, 1/8 Port	M08 8-Station
		DC6	Double Modular Manifold Block, ø6 Fitting	M10 10-Station
		D3	Manifold, Port 1/8 (3/2Way)	

Single Station Sub Base Dimension (SCB31-S)



ITEM	2	4	6	8	10
B	43.0	75.0	107.0	139.0	171.0
A	56.0	88.0	120.0	152.0	184.0

Manifold Block Dimension

ITEM	2	4	6	8	10
B	40.0	72.0	104.0	136.0	168.0
A	53.0	85.0	117.0	149.0	181.0

ITEM	2	4	6	8	10
B	40.0	72.0	104.0	136.0	168.0
A	53.0	85.0	117.0	149.0	181.0

Ordering code	Ordering Code
SCB36-BLK	SCB30-BLK
Blanking Plate (Material : STS304)	Blanking Plate (Material : STS304)
Manifold Gasket. (Material : NBR)	Manifold Gasket. (Material : NBR)
	Base Gasket. (Material : NBR)