

SF4000. 1/4

"F" FLEXIBLE Series

Solenoid / Pneumatic Valves

■ 5/2, 5/3, 3/2 - 1/4


■ 26mm Body Width

■ Transition Flow 1000ℓ/min (5bar)

SPECIFICATION

ITEM	FUNCTION	SOLENOID, PNEUMATIC	
		5, 3 Port 2 Position	5 Port 3 Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Section Area(mm ²)-5bar		19.0	11.5
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		25ms or Less	35ms or Less
Max. Working Frequency		5c/sec	3c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:5.5VA(60Hz) / DC:2.5W	


Transition Capacity Graph

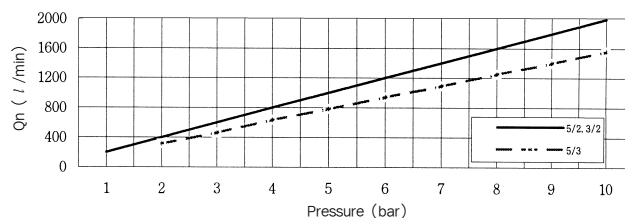


The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast
- Pilot Parts : Glass Filled Nylon
- Armature : Stainless Steel
- Armature Seals : Viton


※ The specification on each item can be amended without any prenotice to improve a performance.
 ※ The specification on each item can be different from actual specification.




SF4101-IP-
2 4
3 1 5




SF4101-IP-SD2-***
2 4
3 1 5




SF4101-IL-SC2-CN2-***
2 4
3 1 5




SF4200-IP-SC2-CN2-***
2 4
3 1 5




SF4303-IP-SD2-***
2 4
3 1 5




SF4601-IP-
2 4
3 1 5




SF4601-IP-SG2-***
2 4
3 1 5




SF4703-IP-SC2-CN2-***
2 4
3 1 5




SFP4101
2 4
3 1 5




SFP4103
2 4
3 1 5




SFP4200
2 4
3 1 5



SFP4303
2 4
3 1 5



SFP4601
2 4
3 1 5




SFP4703
2 4
3 1 5

***: Voltage Selection (see page 80)

ORDERING NO.

SF4 1 0 1 - I P - SC2 - CN2 - A2

Valve Series	Function	Port Size & Thread	Return Method	Int/Ext. Pilot	Manual Operator	Solenoid Coil Type	Connector Type	Voltage
SF4 : Solenoid Valve	1 5/2 Single	0 G 1/4	0 None	I Internal Pilot	0 None	0 None	0 None	0 None
	2 5/2 Double	1 NPT 1/4	1 Air + Spring		P Push	SC2 3 Pin Connector Coil	CN2 Normal Connector	A2 AC 220V
	3 5/3 Closed Center		2 Air		Non-Locking	SG2 Grommet/Flying Leads	CD2 Connector With LED	A1 AC 110V
	4 5/3 Open Center		3 Spring		L Lever Locking	CZ2 Connector With LED & Surge Suppressor	A4 AC 24V	A4 AC 24V
SFP4 : Pneumatic Valve	5 5/3 Pressure Center					SD2 Grommet/Flying Leads With LED	D4 DC 24V	D4 DC 24V
	6 3/2 Normally Closed						D2 DC 12V	D2 DC 12V
	7 3/2 Normally Open							





Solenoid & Pilot Actuated Spool Valves


Port Thread **1/4**

5Port 2Position Solenoid Valve

Single Solenoid
SF4101-IP-SC2-CN2-*

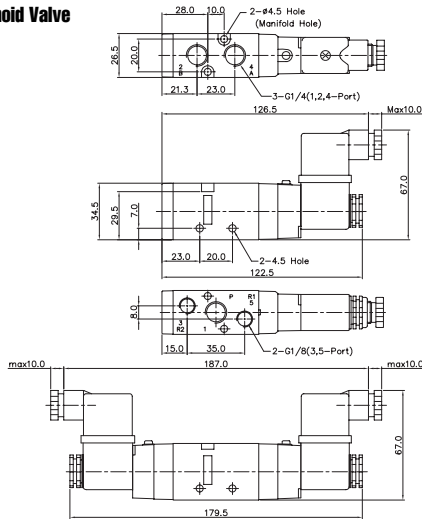


Double Solenoid
SF4200-IP-SD2-*



5Port 3Position Solenoid Valve



Closed Center
SF4303-IP-SC2-CN2-*



Exhaust Center
SF4403-IP-SC2-CN2-*




Pressure Center
SF4503-IP-SC2-CN2-*

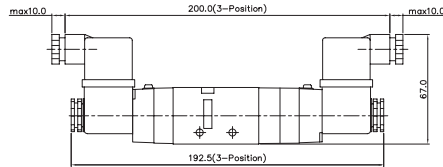



3Port 2Position Solenoid Valve

Normally Closed
SF4601-IP-SD2-*



Normally Open
SF4701-IP-SD2-*

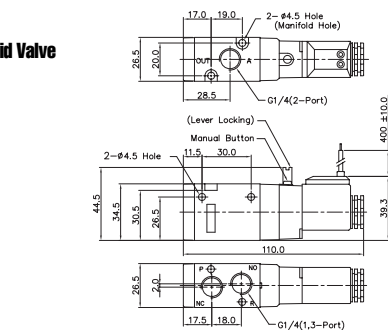



5Port 2Position Pneumatic Valve

Single Pneumatics
SFP4101




Double Pneumatic
SFP4200

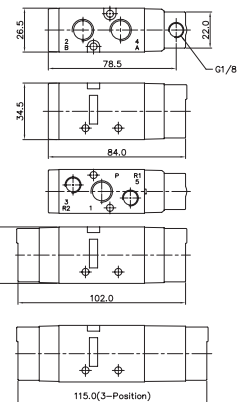


5Port 3Position Pneumatic Valve


Closed Center
SFP4303



Exhaust Center
SFP4403



Pressure Center
SFP4503




3Port 2Position Pneumatic Valve

Normally Closed
SFP4601



Normally Open
SFP4701




MF4000 MANIFOLD BLOCK

(SF4000 Solenoid & Pneumatic Valve Use)

5-Port Manifold Block


MF4500-4

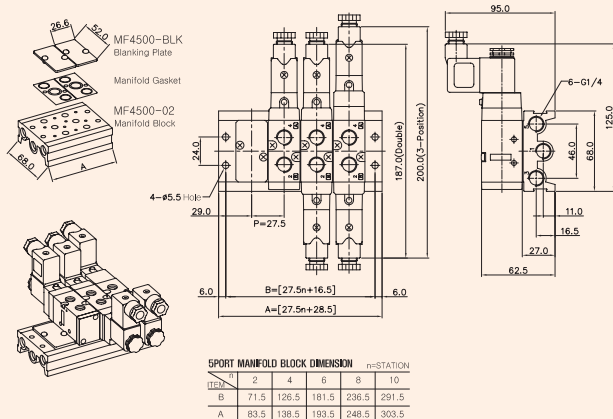

5PORT MANIFOLD BLOCK DIMENSION	n=STATION
	2 4 6 8 10
B	71.5 126.5 181.5 236.5 291.5
A	83.5 138.5 193.5 248.5 303.5

3-Port Manifold Block

MF4300-4

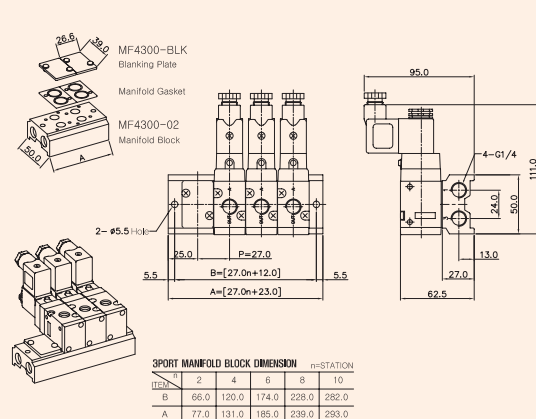

3PORT MANIFOLD BLOCK DIMENSION	n=STATION
	2 4 6 8 10
B	66.0 120.0 174.0 228.0 282.0
A	77.0 131.0 185.0 239.0 293.0

Manifold Block Ordering Code

MF 4500 - 2	
Series	Manifold Station
MF4500	5 Way
MF4300	3 Way
	02 2-Station
	04 4-Station
	06 6-Station
	08 8-Station
	10 10-Station

Blanking Plate Ordering Code

MF4500-BLK	Blanking Plate. (Material: SCP1)
	Manifold Gasket. (Material: NBR)
MF4300-BLK	Blanking Plate. (Material: SCP1)
	Manifold Gasket. (Material: NBR)