


SIE300

"E" ECONOMY Series
Solenoid / Pneumatic Valves

- 5/2, 5/3
- 26mm Body Width
- Sub-Base or Manifold Mounting Type
- Transition Flow 1000ℓ/min (5bar)

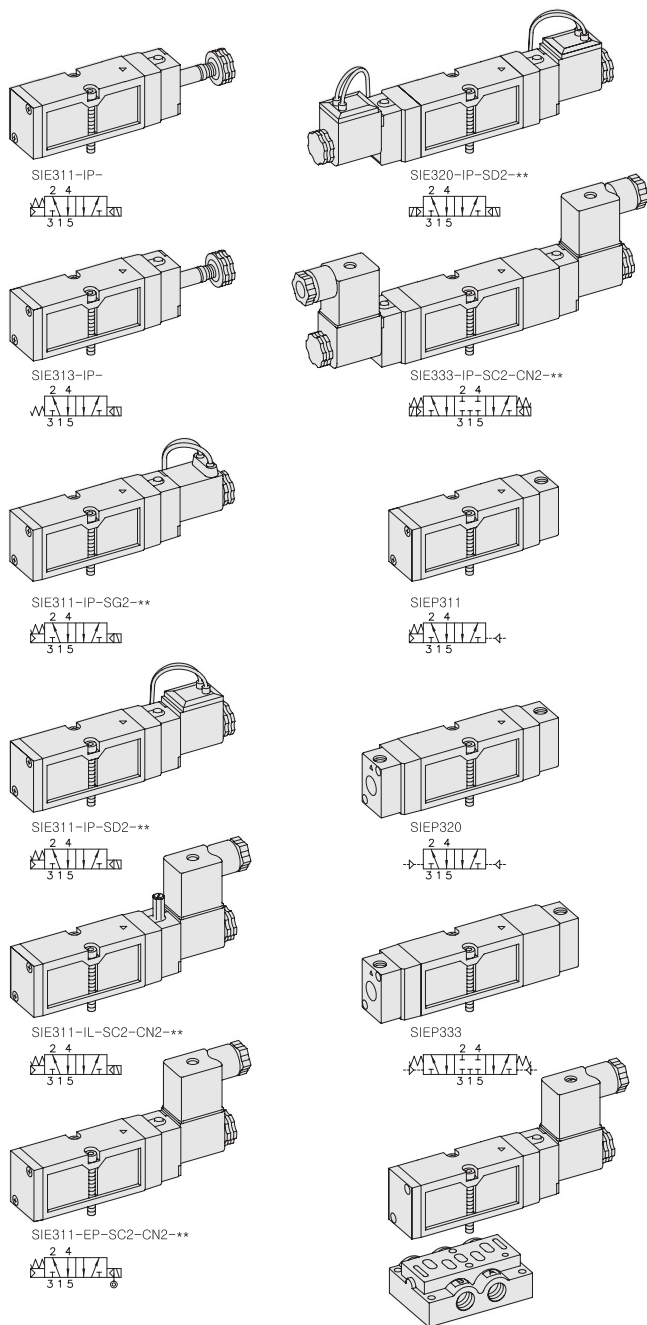


** : Voltage Selection (see page 80)

SPECIFICATION

ITEM	FUNCTION	SOLENOID, PNEUMATIC	
		5 Port 2 Position	5 Port 3 Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Sectional Area(mm ²)-5bar		18.0	11.0
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		25ms or Less	35ms or Less
Max. Working Frequency		5c/sec	3c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:5.5VA(60Hz) / DC:2.5W	

Transition Capacity Graph

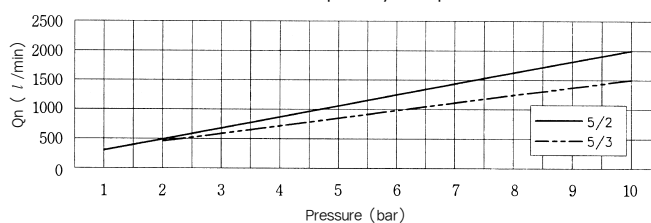

The Material of Parts



- Valve Body : Die-Cast Aluminium
- Pilot Parts : Glass Filled Nylon
- Spool : Aluminium
- Armature : Stainless Steel
- Seals : NBR
- Armature Seals : Viton
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

ORDERING NO.

SIE3 1 1 - I P - SC2 - CN2 - A2

Valve Series	Function	Return Method		Int/Ext. Pilot		Manual Operator	Solenoid Coil Type		Connector Type	Voltage	
SIE3 : Solenoid Valve	1 5/2 Single	0	None	I	Internal Pilot	0	None	0	None	0	None
	2 5/2 Double	1	Air + Spring	P	External Pilot	P	Push Non-Locking	SC2	3 Pin Connector Coil	CN2	Normal Connector
	3 5/3 Closed Center	2	Air			L	Lever Locking	SG2	Grommet/Flying Leads	CD2	Connector With LED
	4 5/3 Open Center	3	Spring					SD2	Grommet/Flying Leads With LED	CZ2	Connector With LED & Surge Suppressor
	5 5/3 Pressure Center									D4	DC 24V
SIEP3 : Pneumatic Valve										D2	DC 12V






Solenoid & Pilot Actuated Spool Valves

26mm Body Width


5Port 2Position Solenoid Valve

Single Solenoid
SIE311-IP-SD2-***

External Pilot
SIE311-EP-SD2-***



Double Solenoid
SIE320-IP-SC2-CN2-***

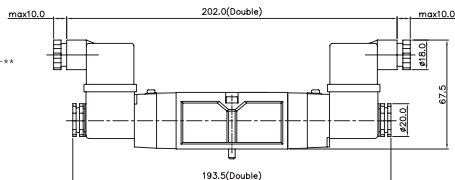


5Port 3Position Solenoid Valve

Closed Center
SIE333-IP-SC2-CN2-***




Exhaust Center
SIE343-IP-SC2-CN2-***

Pressure Center
SIE353-IP-SC2-CN2-***

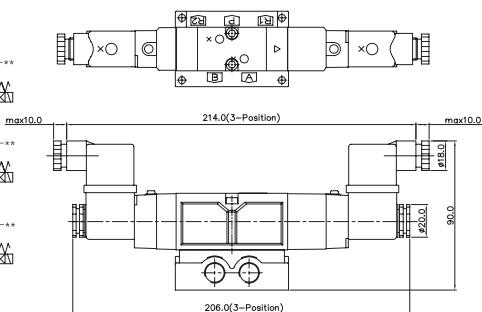


5Port 2Position Pneumatic Valve

Single Pneumatic
SIEP311



Double Pneumatic
SIEP320




5Port 3Position Pneumatic Valve

Closed Center
SIEP333

Exhaust Center
SIEP343

Pressure Center
SIEP353




Sub Base Ordering Code

SIB3 1 - S		
Sub Base Series	Port & Thread	Function
SIB3	0 None	S Single Station Sub Base, 1/4 Port Without Pilot Ports
SIE300 Solenoid Valve	1 G	SP Single Station Sub Base, 1/4 Port With Pilot Ports
	2 NPT	DB Double Modular Sub Base, 1/4 Port Without Pilot Ports
		DC8 Double Modular Sub Base, ø8 One-Touch Fitting
		E End Cover, 1/4 Port
		EB End Blanking Cover




SIB30 SINGLE, DOUBLE SUB BASE

(SIE300 Solenoid & Pneumatic Valve Use Sub Base)

Double Modular Sub Base Dimension

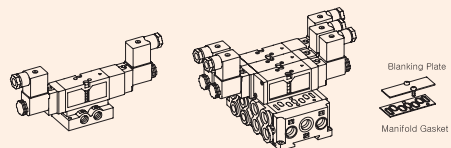

Single Station Sub Base Dimension

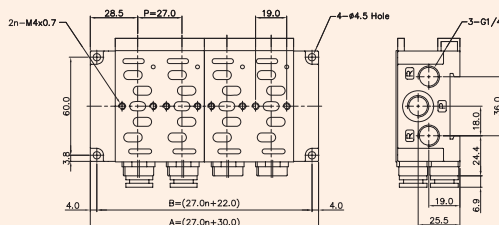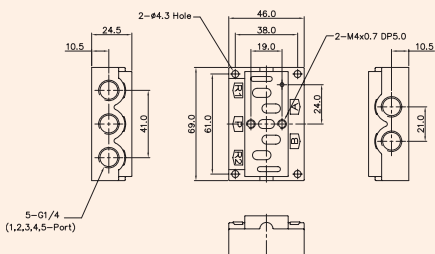

DOUBLE MODULAR SUB BASE DIMENSION		n=STATION				
ITEM	n	2	4	6	8	10
A	76.0	130.0	184.0	238.0	292.0	
B	84.0	138.0	192.0	246.0	300.0	

Ordering Code SIB30-BLK	Blanking Plate (Material: STS304)
Ordering Code SIB31-E	Manifold Gasket. (Material: NBR)
Ordering Code SIB30-EB	End Cover, 1/4 (Material: AI)
Ordering Code SIB31-DB	End Blanking Cover (Material: AI)
Ordering Code SIB30-DC8	Double Modular Sub Base, 1/4 (Material: AI)
Ordering Code SIB30-DC8	Double Modular Sub Base ø8 one-touch fitting (Material: AI)