

Solenoid Coil Series CHAPTER 08

- A Wide Range of Option
- Various Voltage Specification
- 15mm Coil Width
- 22mm Coil Width



SC1-**
IP65(With Connector)



SC2-**
IP65(With Connector)



SG1-**
IP65



SG2-**
IP65



SD1-**
IP42
Indicator : LED



SD2-**
IP42
Indicator : LED



SL1-**
IP42
Indicator : LED



SM1-**
IP42
Indicator : LED

** : Voltage Selection

SPECIFICATION

FUNCTION ITEM			SOLENOID COIL	
			SC1	SC2
Voltage Tolerances			±10% of Rated Voltage	
Coil Insulation Class			F-Class or Equivalent	
Temperature Range			5~60°C (41~140°F)	
Holding Power	AC	60Hz	3.5VA	5.5VA
		50Hz	4.5VA	6.5VA
	DC		2.5W	2.5W

The Material of Parts

- Molding : Glass Pressure Nylon
- Lead Wire : AWC-no.22, no.24
- Lead Wire Packing : Viton
- Yoke : Carbon Iron
- Indicator Cap : Polycarbonate



※ The specification on each item can be amended without any prenotice to improve a performance.
 ※ The specification on each item can be different from actual specification.

ORDERING NO.

SC1 - A2

Solenoid Coil Type	
SC1	15mm-3 Pin Connector Coil
SG1	15mm-Grommet/Flying Leads
SD1	15mm-Grommet/Flying Leads With LED
SL1	15mm-90 Degree Plug-in Wire Assembly LED
SM1	15mm-180 Degree Plug-in Wire Assembly LED
SC2	22mm-3 Pin Connector Coil
SG2	22mm-Grommet/Flying Leads
SD2	22mm-Grommet/Flying Leads With LED

Voltage	
A2	AC 220V
A1	AC 110V
A4	AC 24V
D4	DC 24V
D2	DC 12V




Solenoid Coil Series

15mm Width / 22mm Width


SC1-**-

(3Pin Connector Coil)

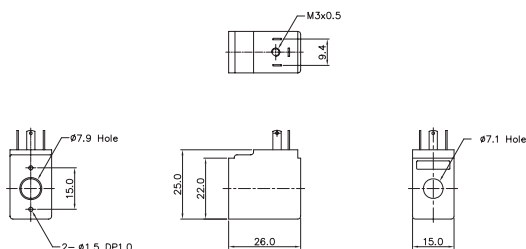


SC2-**-

(3Pin Connector Coil)

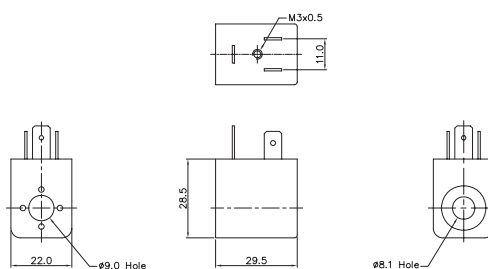


SG1-**-

(Grommet/Flying Leads)

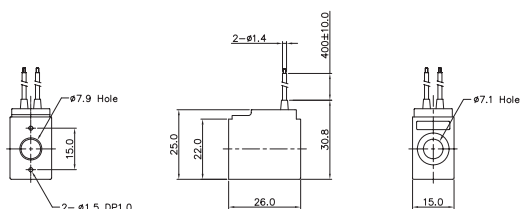


SG2-**-

(Grommet/Flying Leads)

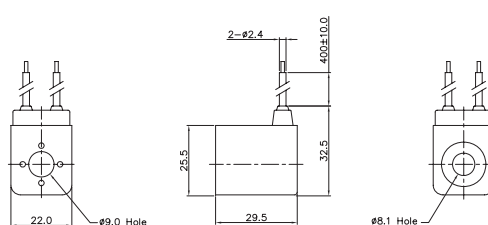


SD1-**-

(180 Degree Plug-in Wire Assembly LED)

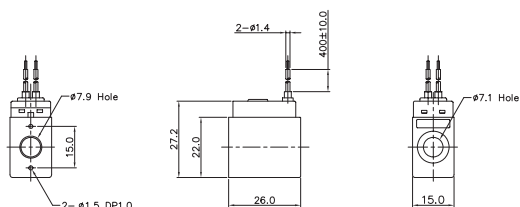


SD2-**-

(Grommet/Flying Leads With LED)

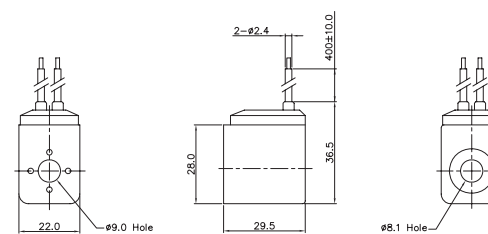

SL1-**-

(90 Degree Plug-in Wire Assembly LED)

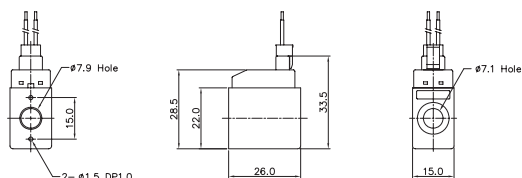

SM1-**-

(180 Degree Plug-in Wire Assembly LED)

