


YMV Series

Manually & Mechanically
Actuated Spool Valves

- 3/2
- Direct Operation Type
- A Wide Range of Option available
- Simple Panel Mounting

SPECIFICATION


ITEM	FUNCTION	YMV310	YMV410
		3/2-Way	
Fluids		Compressed Air & Inert Gases	
Port Size		1/8	1/4
Pressure(bar)		0~8.0	
Eff. Sectional Area(mm ²)-5bar		10.5	16.0
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Lubrication		Not Required(Use ISO VG32 #)	

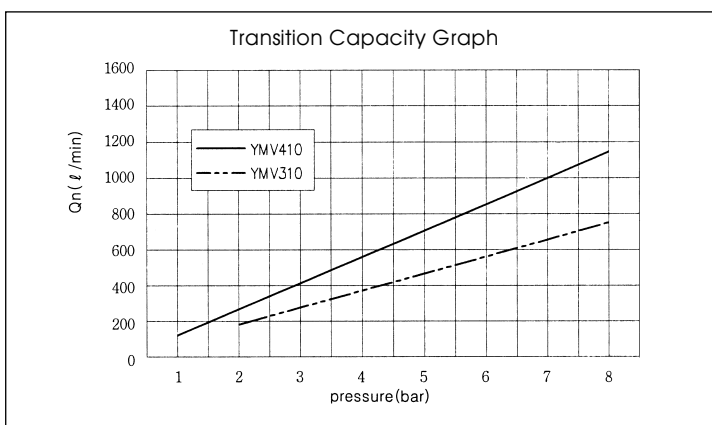

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Button Parts : Stainless Steel, POM
- Switch Parts : Glass Filled Nylon, POM

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

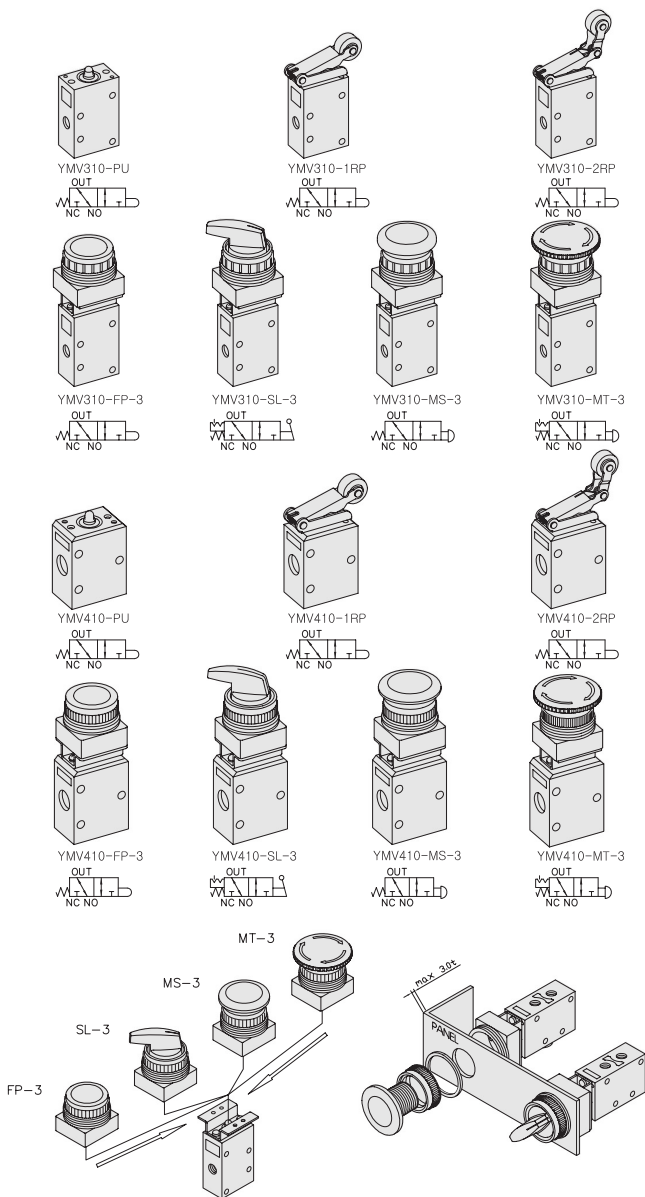

ORDERING NO.

YMV3

1

0

-

FP

-

3

Valve Series

YMV3:
1/8-Port Body

YMV4:
1/4-Port Body

Function

1 3/2 - Spring Return

Port Size & Thread

0 G
1 NPT


Switch Type

PU	Pushrod
1RP	Two-way Plastic Roller Lever
1RB	Two-way Bearing Roller Lever
2RP	One-way Plastic Roller Lever
2RB	One-way Bearing Roller Lever
FP	Flush, Push Button (R)
SL	2-Position Selector (B)
MS	Mushroom 40mm dia Spring Return (R)
MT	Mushroom 40mm dia Turn to Unlock (R)

() Standard Color

Mounting Holes


3 30mm




Manually & Mechanically Actuated Spool Valves

Port Thread 1/8, 1/4


3/2-Way, Direct Pushrod Operation Thread-1/8




T ₁	Valid Operation Dist	3.5mm
T ₂	Invalid Operation Dist	1.0mm
F ₁	Pressure for Valid Operation	3.5kg
F ₂	Pressure for Invalid Operation	

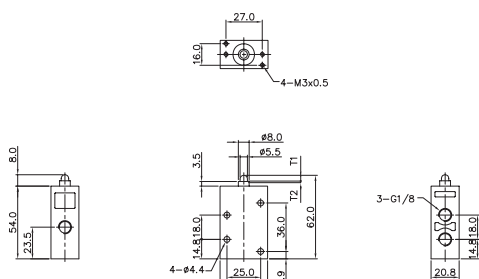


3/2-Way, Direct Pushrod Operation Thread-1/4




T ₁	Valid Operation Dist	3.5mm
T ₂	Invalid Operation Dist	1.0mm
F ₁	Pressure for Valid Operation	3.5kg
F ₂	Pressure for Invalid Operation	

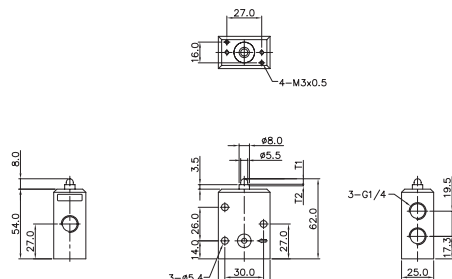


3/2-Way, Direct Roller Lever Operation Thread-1/8




	YM310-1RP	YM310-2RP
T ₁	Valid Operation Dist	8.5mm 9.0mm
T ₂	Invalid Operation Dist	3.0mm 3.5mm
F ₁	Pressure for Valid Operation	2.0kg 2.0kg
F ₂	Pressure for Invalid Operation	

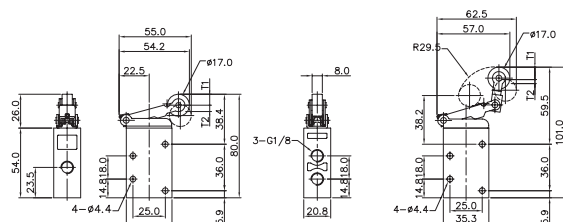

3/2-Way, Direct Roller Lever Operation Thread-1/4



	YM410-1RP	YM410-2RP
T ₁	Valid Operation Dist	8.0mm 9.0mm
T ₂	Invalid Operation Dist	3.0mm 3.5mm
F ₁	Pressure for Valid Operation	2.0kg 2.0kg
F ₂	Pressure for Invalid Operation	


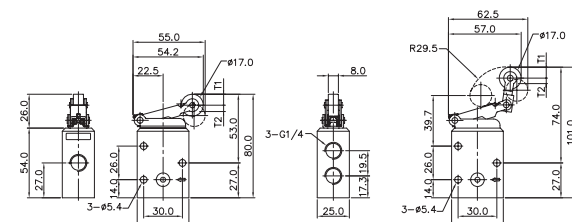


3/2-Way, Direct Pushrod & Selector Operation Thread-1/8

T ₁	Valid Operation Dist	5.5mm
T ₂	Invalid Operation Dist	1.0mm
F ₁	Pressure for Valid Operation	3.5kg
F ₂	Pressure for Invalid Operation	



Flush , Push Button 2-Position Selector Dia Spring Return Turn to unlock

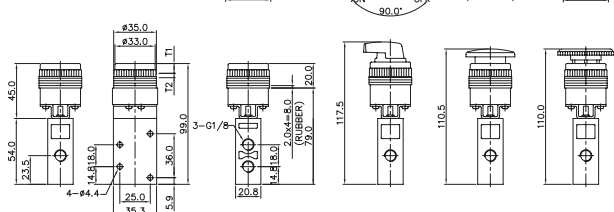

3/2-Way, Direct Pushrod & Selector Operation Thread-1/4

T ₁	Valid Operation Dist	5.5mm
T ₂	Invalid Operation Dist	1.0mm
F ₁	Pressure for Valid Operation	3.5kg
F ₂	Pressure for Invalid Operation	



Flush , Push Button 2-Position Selector Dia Spring Return Turn to unlock

